

JFEGWO
KEEP ENERGIZED

**THANK
YOU!**

FOLLOW US



@jfeqwous



@jfeqwo



@jfeqwo



@jfeqwo



@jfeqwo



@jfeqwo_official

CONTACT US



jfeqwo.com



cs@jfeqwo.com

JFEGWO
JUMP STARTER

User Guide



Please check the instruction video at: jfeqwo.com

WARRANTY

Thank you for choosing **JFEGWO** jump starter. We appreciate your trust in our product and are committed to providing excellent customer service and the best possible customer experience.

This jump starter comes with a one-year warranty from the date of purchase. During this warranty period, we will repair or replace any manufacturing or material defects free of charge. This excludes damage caused by misuse, accidents, unauthorized repairs, or failure to follow the product instructions. Additionally, the warranty does not cover normal wear and tear.

We are confident that the product will meet your expectations and offer reliable performance. If you have any questions or require further assistance, please do not hesitate to reach out to our customer service team.

Best regards,
JFEGWO

 jfegwo.com

 cs@jfegwo.com


INSIDE THE BOX

NO.	Components	NO.	Components
1	JFEGWO Jump Starter	4	USB Cable
2	User Manual	5	Tool Bag
3	Battery Clamps Cable		

SPECIFICATION


Size	22.8*10.4*4.7cm / 8.98*4.1*1.85 inches
Weight	1.1 kg / 2.43 lbs
USB-A Output	5V=2A
USB-C Output	5V=2A
USB-C In/Output	5V=2A
Jump Starter Output	12V
Operating Temperature	-40°~60° / -40°F~140°F

PRODUCT DETAILS

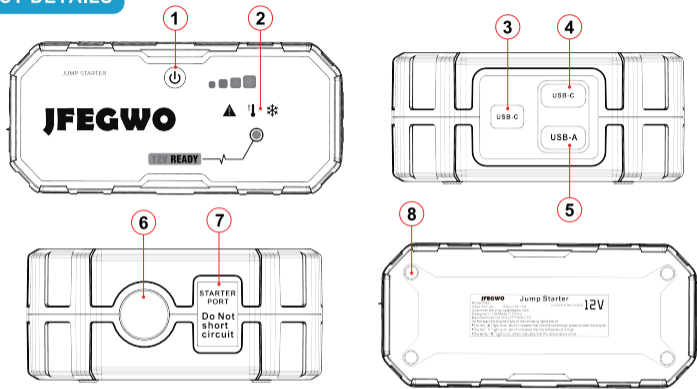

NO.	Explanation	NO.	Explanation
1	Power & LED Light Button	5	USB-A Output Port: 5V \square 2A
2	Function Display Panel	6	LED Light
3	USB-C Input Port: 5V \square 2A	7	12V Jumpstart Port
4	USB-C Output Port: 5V \square 2A	8	No-slip Mat

BUTTON & LED DISPLAY

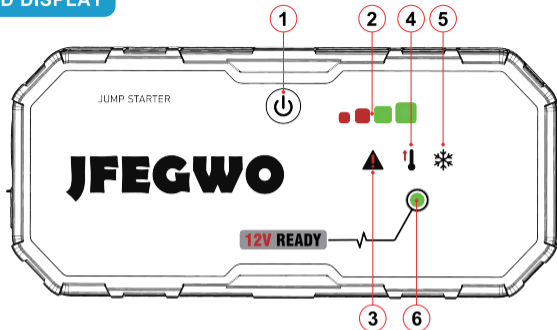

NO.	Explanation	NO.	Explanation
1	Power & LED Light Button: Press to start; press in the powered-on state to switch to flashlight modes (steady, flash, SOS) and power off.	4	High Temperature Alarm Light: Do not start the car when the light is on.
2	Power Indicator: Flashes during charging and remains steady when fully charged.	5	Low Temperature Alarm Light: Do not start the car when the light is on.
3	Warning Light: Do not start the car when the light is on.	6	Operation Indicator: Once the product is turned on, the green light will be on.

WARNINGS


- Please charge the unit before its first use. Additionally, recharge it every three months if it remained unused.
- DO NOT use it while it is being charged.
- DO NOT START the vehicle if the warning of "low power", "high temperature", or "low temperature" is flashing.
- Do not repeatedly attempt to start the vehicle more than 5 times in a row. If it fails to start, remove the battery clamps, ensure the power indicator is displaying green, and try again.
- DO NOT put the item on or near flammable objects.
- DO NOT use it in or near water.
- DO NOT disassemble or attempt to repair the product without professional instruction. Doing so will void the warranty and may cause accidents.
- DO NOT use the unit if you are under the age of 18.
- If your initial attempt to start your vehicle fails, it is recommended to remove the plug from the jump port before trying again. This will allow the system to reset and may increase the chances of a successful start.




STEPS TO JUMPSTART




1. Press the power button to turn on the unit. Ensure that the power status indicator shows green. If there is no activity for 30 seconds, except for the jumpstarter function, the power status display will automatically turn off.




4. Start the car.




2. Plug the cable into the jump port on the left. If the blue light turns on, you're ready to proceed. However, if a red light and alarm are triggered, it indicates low power in the unit. Please charge it before attempting to start your vehicle.



5. Once the vehicle has started, detach the cable from the unit within 30 seconds.



3. Attach the red clamp to the positive terminal and the black to the negative. You should hear a "click" sound and see a green light turn on. In case of an alarm or red light, simply swap the clamps to resolve the issue.



6. You can now remove the clamps. Well done!

Notes:

- Do not try to start a vehicle more than 5 times in a row if it hasn't started. If unsuccessful, remove battery clamps and ensure the power status of the unit shows green before trying again. If the vehicle still doesn't start, check for other possible issues before inspecting the battery.
- Jump starter cables have a "BOOST" button for a power surge in case a regular jump start fails. Press and hold the button for 3 seconds to start the engine. Be careful not to clamp the battery in reverse during a Force Start as it can damage the electrical system or lead to an explosion.

HAZARDOUS SUBSTANCE

Name of prts	Pb	Hg	Cd	Cr (VI)	PBB	PBDE
Shell	○	○	○	○	○	○
Battery Cell	○	○	○	○	○	○
PCBA	×	○	○	○	○	○

This list was created in accordance with RoHS standards.

○: Indicates that the substance content is within the IEC62321 standard.

×: Indicates that the substance content in certain parts exceeds the IEC62321 standard.

FAQs

Q: Can I use the unit to jumpstart my yacht, mower, or other battery-equipped items?

A: Yes, you can use the unit to jumpstart any 12V battery-equipped item.

Q: Can I charge devices with the USB ports while the unit is charging?

A: No, using the USB ports while the unit is charging may damage it. If you need to charge a device in an emergency, you can temporarily stop charging the unit to charge the device.

Q: Why doesn't the jumper start my car?

A: Here are some troubleshooting steps:

1. Do not jump start the car if the warning light is flashing.
2. Check if the low temperature alarm is flashing. If it is, bring the product indoors until the alarm is released.
3. Check if the high temperature alarm is flashing. If it is, allow the product to cool down automatically.
4. Check if the power status is displaying red and flashing. If it is, please charge the unit.

Q: Is the unit airline approved? Can I take it on a commercial flight?

A: The jumpstarter contains a built-in lithium battery. It may be allowed on certain flights, but we recommend checking with your airline for specific regulations.

Q: Why can't I recharge the unit?

A: Please note that if the unit is being recharged properly, the battery icon on the power screen should flash. If it doesn't, there may be a malfunction either with the unit itself or with the charger adapter/cable. We suggest trying another charger or cable to rule out other possible causes.

Q: Can I use the car charger instead of a home charger to charge the unit?

A: Yes, you can use a 5V charger with a USB-C port to charge the unit.

Q: Why does the product stop working after starting the car once?

A: The clamps have a built-in protection device. Please disconnect the product from the clamps and reconnect it after an unsuccessful attempt to start the car.

Q: Why do the clamps not work after connecting them to the unit?

A: Here are the possible reasons:

1. If the connection time exceeds 3 minutes, the clamps will automatically power off. In such cases, please unplug them and reconnect.
2. If the clamps light up red and an alarm sound is heard, it indicates that the unit needs to be charged.
3. If the clamps only light up blue after connecting them to the car battery, it means that the unit has not detected the battery or the battery itself is damaged. In this situation, please press the "BOOST" button while ensuring correct connection to the car battery's positive and negative terminals.

Q: Can I start my car when the battery indicator shows only 2 red bars?

A: Yes, you can start the car, but the starting performance may be poor. It is recommended to start the car when the power status is displaying green.

Q: Why can't I turn on the jump starter after starting my car? Is it broken?

A: It's possible that the jump starter has entered a protection mode. In this case, you can use a charger to charge it and activate it for normal use.

Q: Why am I still able to charge and discharge the jump starter when the panel shows high temperature or low temperature warning?

A: The warning primarily indicates the risk of starting a car under those temperature conditions. Charging and discharging the jump starter is not affected. The warning will automatically disappear when the temperature returns to the normal working range.

[Have more questions?](#)

[Email cs@jfegwo.com](mailto:cs@jfegwo.com)

[We are ready to help.](#)

The image shows a close-up of a modern building's facade with a large, three-dimensional logo that reads "JFEGWO". The building has a grey, textured surface with vertical lines. The sky is a clear, light blue. The logo is positioned on the upper part of the facade, and the building's structure creates strong geometric lines and shadows.

ABOUT US

At JFEGWO, we're passionate about empowering our customers to stay energized and prepared for anything. As a leading provider of high-quality jump starters, we're dedicated to delivering innovative energy solutions that keep you powered up no matter where life takes you.

Our commitment to "keep energized" is more than just a slogan - it's a promise that we take seriously, reflected in the reliability, convenience, and quality of our products.