



Opal Shower Rail

Nero

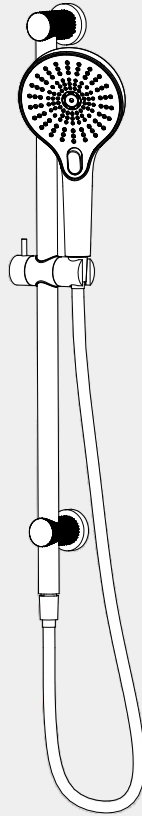

Versions:202401

Drawing

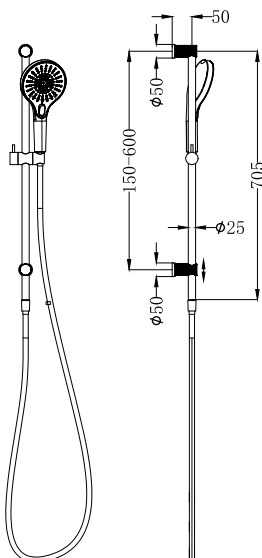

Specifications

Watermark License

WM-060093

Temperature Rating

Min 1°C - Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

- 1x Hand Shower (Built- In Check Valve)
- 1x Shower Rail
- 1x 1.5m PVC Hose
- 2x Back Plates
- 1x Installation Kit

Finish & SKU


- | | |
|--|--|
|  Brushed Bronze
NR251905dBZ |  Graphite
NR251905dGR |
|  Brushed Gold
NR251905dBG |  Brushed Nickel
NR251905dBN |

*Dimensions are nominal measurements only.

Important

All products must be installed by licensed plumbers.


All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

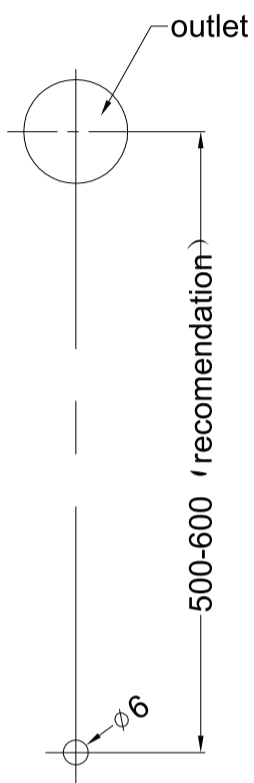


1. Drill a $\phi 6$ mm hole at the downwards outlet vertical downward position in the recommended range.




2. Screw the adapter onto the outlet. Push wall plug into drilled hole. Fit lower mounting pillar in place with screw. Tighten firmly.

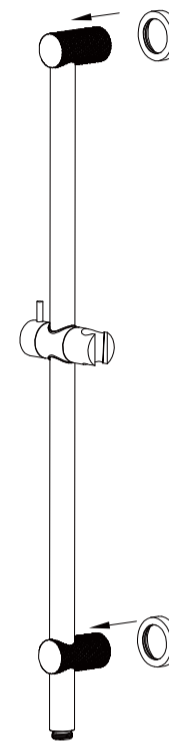

3. Slide both top and bottom back plate onto the rail assembly, as shown on the picture.

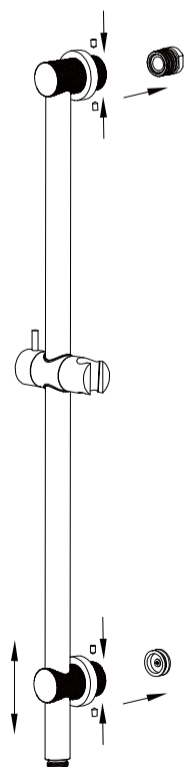

4. Push shower rail assembly onto the wall/tile face. Tighten grub screws firmly. Slide the back plates against the wall/tile face properly.

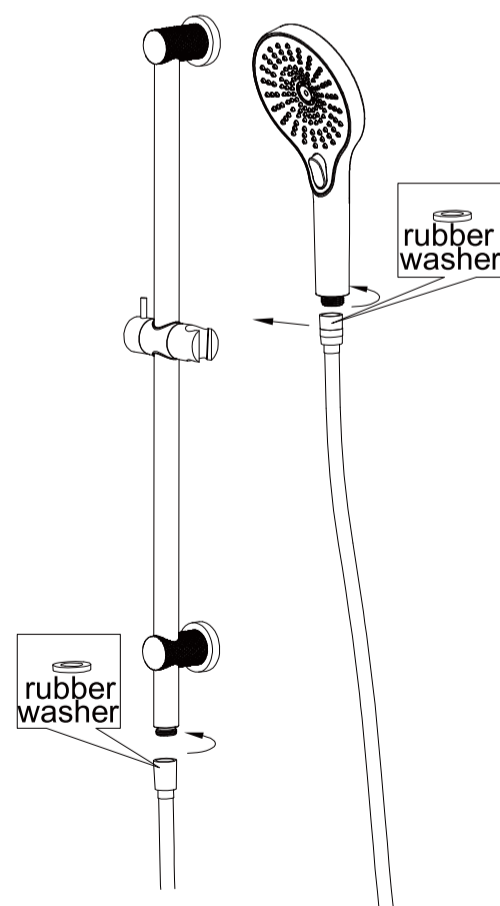

5. Connect shower rail and hand shower with hose. TEST & CHECK FOR LEAKS.

Nero

info@nerotapware.com.au
nerotapware.com.au

11-13 Buontempo Road
Carrum Downs Vic 3201

