Frassanito 60" Recessed Range Hood with Baffle Filters
Model: FRHRE5346-60

FORNO
Espresso

2 YEARS WARRANTY

FEATURES AND BENEFITS

1. Features a stainless steel finish and baffle filter design.
2. A powerful 900 CFM airflow blower quickly and efficiently removes smoke, grease, and odours from your kitchen, ensuring maximum ventilation of fumes while minimizing noise levels.
3. 3 speed push button control makes it simple to adjust the fan speed according to your needs.
4. Three LED surface lights offer long-lasting performance and energy efficiency with bright illumination of the cooking surface.
5. The baffle filter's combination of panels and curved plates a larger surface area that causes oils in the hot air to condensate on the steel. Dishwasher safe design allows for easy cleaning.
6. This insert range hood is designed to fit seamlessly into any custom cabinetry installation or hood enclosure.
7. Maximum power ventilation at a low noise level of 65dB allows you to enjoy an effective ventilation system without obtrusive noise disruption. Low setting delivers sound level of 45dB.

APPEARANCE

Size	60"
Style design	Built-in / Insert
Unit Color	Stainless Steel / Grey Metal
Ventilation Type	Vertically Upward

CAPACITY

# Speed levels	3	
CFM (cubic feet per minute)	Level 1	450
	Level 2	650
	Level 3	900
Air flow (m³/hr)	Level 1	765
	Level 2	1105
	Level 3	1530
RPM (Revolutions Per Minute)	Level 1	1130
	Level 2	1590
	Level 3	1820
Noise Level at each speed (Db)	Level 1	45
	Level 2	55
	Level 3	65
Full Size (In.)	W: 58.94" D: 11.10" H: 11.85"	
Weight (lbs)	67.68	
Duct Shape	Round	
Duct Size	6"	

FEATURES

Control type	Push Button Control
Number of Hood filters	4
Hood Filter type	Baffle
Light Type	LED
Number of Lights	4
Damper	1
Number of Ducts	2
Handles	No
Handle Color	N/A

TECHNICAL SPECIFICATIONS

Electrical supply	110~120V/60Hz
Receptacle type	NEMA 5-15
Power rating	460
Certification	ETL
Warranty	2 Years
Packaging dimensions (In.)	65.55" W x 14.72" D x 15.35" H
Packaging Weight (lbs)	107.14

58 1/4" (1480mm)

10 1/2" (267mm)

Min 25/32" (20mm)

58 3/16" (1478mm)

10 3/8" (263mm)

φ5 7/8" (150mm)

11 27/32" (301mm)

Screw (ST3.9*25)

11 1/8" (282mm)

58 15/16"(1497mm)
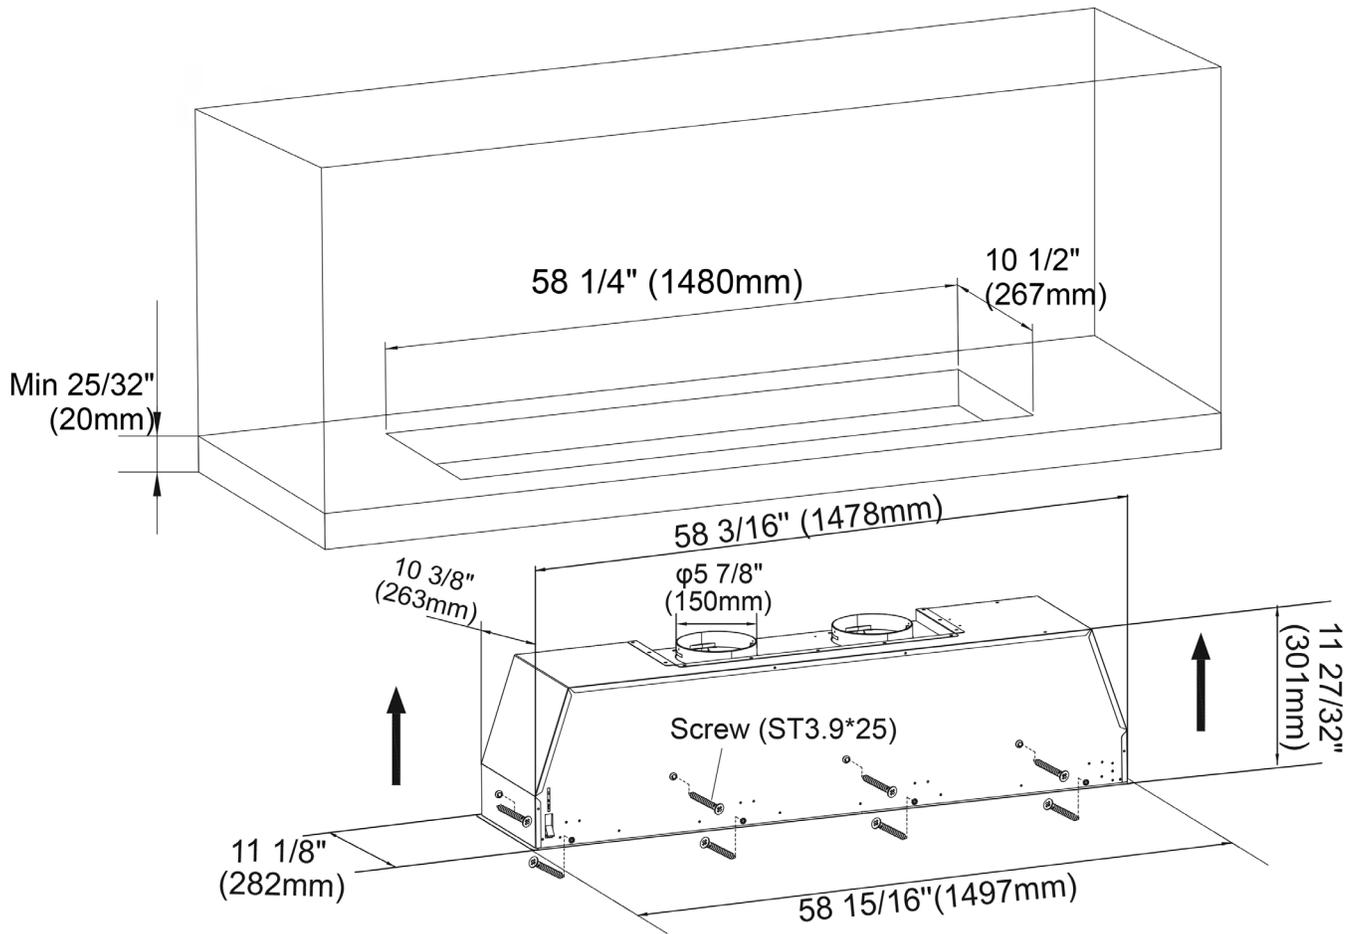
View From the Top (Vents & Power Cord Location)

4 3/8" (110mm)

7 1/8"(181mm)

1/2" (14mm)

7/8"(22.5mm)

1 1/2" (38mm)

3 1/2"(89mm)

4 1/8"(104mm)

6 3/4"(171mm)

1 5/32"(29mm)