


# intelligent Optical Link Mapper (iOLM)

OTDR-BASED APPLICATION MAKING EXPERT-LEVEL FIBER TESTING ACCESSIBLE TO ALL



Powered by  
**LINK AWARE**  
TECHNOLOGY

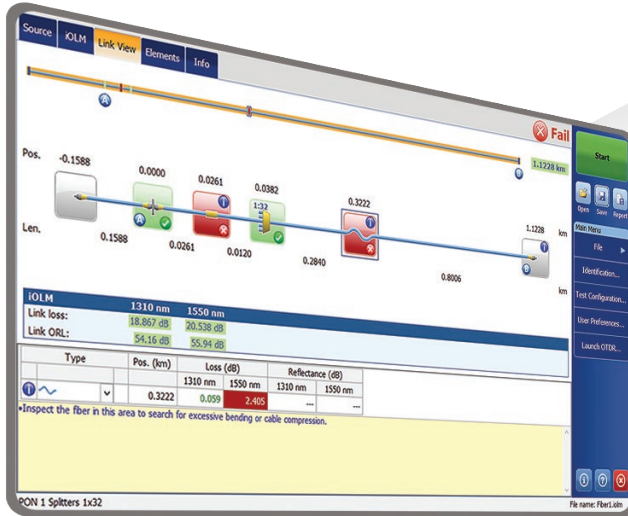

## Available on:

- > MaxTester 700B/C OTDR Series
- > FTB-700C OTDR Series
- > FTBx-700C OTDR Series
- > FTB-7000E OTDR Series

Patent protection applies to the intelligent Optical Link Mapper, including its proprietary measurement software. EXFO's Universal Interface is protected by US patent 6,612,750.

Simplify OTDR tests while optimizing characterization accuracy for all network topologies. iOLM is powered by intelligent algorithms that can uniquely adapt to the context. Still unmatched in the industry, iOLM dynamically locates and identifies all network components and faults with maximal resolution—all at the push of one button.

## KEY FEATURES

- Self-setting unit dynamically adapting to any fiber link
- Intelligent multi-acquisitions at multiple wavelengths in a single icon-based link view
- Comprehensive fault diagnosis and guidance
- Consolidated bidirectional link view (patent-pending)
- OTDR trace file generation (.sor)
- TIA/IEC automated pass/fail thresholds for enterprise/data centers (optional)
- Test two fibers at once with loopback testing mode (optional)

## COMPATIBLE PLATFORMS

### FTB Family Platforms



Handheld OTDR  
MaxTester 700B/C Series



FTB-1v2/  
FTB-1 Pro



FTB-2/  
FTB-2 Pro

FTB-4 Pro

## KEY NETWORK APPLICATIONS

- Point-to-point access
- FTTx last mile
- LAN/WAN, enterprise and data center certification
- FTTx/PON MDU
- Fronthaul (FTTA, DAS and small cells) and backhaul
- FTTH unbalanced/Tapered PON
- Passive optical LAN (POL)
- Metro core and long haul
- CWDM/DWDM
- Cable certification (IL/ORL measurement)
- Multifiber MPO cable characterization



## GO BEYOND OTDR TESTING

Innovation is front and center at EXFO, and the intelligent Optical Link Mapper (iOLM) is a prime example of a game-changing solution. The iOLM lets you take advantage of the full power of your OTDR—bringing automation to a new level and enabling untrained technicians to become test experts in no time.

The iOLM integrates EXFO's fiber testing expertise into a simple, easy-to-use software that will step up your OTDR testing capabilities. Moreover, EXFO designs and optimizes each OTDR model to offer the best possible performance for its specific application, giving you a tailored solution to meet your needs and context.

## iOLM—REMOVING COMPLEXITY FROM THE OTDR

### OTDR TESTING COMES WITH ITS SHARE OF CHALLENGES...



## TO TAKE ON THESE CHALLENGES, EXFO DEVELOPED A BETTER WAY TO TEST FIBER OPTICS



**iOLM** | intelligent Optical  
Link Mapper

### HOW DOES IT WORK?

**Dynamic  
multipulse  
acquisition**




**Intelligent  
trace analysis**



**Combine all  
results into a  
single link view  
and single report file**



**Comprehensive  
diagnosis**

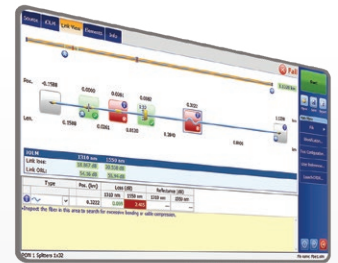

iOLM adjusts test parameters dynamically for ANY link under test—using a mix of short, medium and long pulses as needed.

Based on the multiple acquisitions and with the help of advanced algorithms, iOLM is able to detect more events with maximum resolution.

Results are visually displayed in an icon-based fiber-link view to quickly assess each event's pass/fail status per standard selected, eliminating any risk of misinterpretation.

Delivers an analysis of failed events and suggests solutions; guides the technicians in fixing the fault quickly and successfully.

**Turn traditional OTDR testing  
into clear, automated,  
first-time-right results for  
technicians of any skill level.**

### THREE WAYS TO BENEFIT FROM THE iOLM

**1**

#### **OTDR combo (Oi code)**

Run iOLM and OTDR applications on one unit

**2**

#### **Upgrade**

Add the iOLM software option, even while in the field

**3**

#### **iOLM only**

Order a unit with the iOLM application only

## UNIQUE FEATURES

### SINGLE-ENDED FIBER DEPLOYMENTS MADE EASY



#### Link-Aware™ technology

**Optimize the test run:** With one click, the unit automatically performs link recognition, sets the optimal parameters and launches multiple acquisitions and analyses—at multiple wavelengths—consolidating the results obtained for every link section and every network element. Get accurate information right away on each link element and export it to a single report.



#### Self-setting unit

**Be the expert:** Powered by Link-Aware technology, the iOLM self-manages the setting of all test parameters for ready-to-use intelligence that dramatically shortens the learning curve. Minimize training, avoid test misconfiguration, and facilitate your technicians' transition from copper to fiber.



#### Optical link view

**Crunch the data:** Leaving complex OTDR traces behind, the simplified link mapper provides a straightforward view of the fiber under test, with clear icons and pass/fail verdicts. Get actual results: end-to-end visual assessment of your link, complete with event characterization and fiber status.



#### Intelligent diagnostics

**Let it show you the way:** Loaded with countless algorithms and a database of potential network failures, the iOLM guides you through your network's problem-solving process. Say goodbye to trace misinterpretation and ensure that all your technicians—not just the most experienced ones—can efficiently fix network issues right on the spot.



#### OTDR trace file generation

**Fits your existing procedures:** The iOLM can generate a universal and enhanced Bellcore format (.sor) OTDR trace to comply with your existing reporting and post-processing requirements. This OTDR trace integrates all the additional information gathered by the iOLM, providing more complete results.



#### Single iOLM file per link

**Consolidate the results:** While iOLM gives you more link information based on multiple acquisitions, it will not annoy you with plenty of messy files for a given link. iOLM simplifies reporting. What you get in the field is what you can see and process on your PC!



#### Bidirectional analysis (Via FastReporter data post-processing software)








**Combine the results:** Recommended to ensure true splice characterization, bidirectional analysis combines results from both directions to provide an average loss for each event. Use of bidirectional analysis with the iOLM ensures that you benefit from maximum resolution on both directions (multiple pulse widths at multiple wavelengths), as well as a consolidated view.



#### iOLM

**Supports any network topology:** point-to-point, centralized PON, cascaded PON or unbalanced/tapered PON (covered by standard iOLM).

ADDITIONAL FEATURES <sup>a</sup>

BOOST YOUR EFFICIENCY	
<b>iOLM Advanced (iADV)</b> <sup>b</sup>	 <p><b>Real-time averaging</b></p> <p>Activates the OTDR laser in continuous shooting mode and adjusts parameters on the fly without stopping or returning to submenus; the trace refreshes in real time, making it possible to monitor the fiber for sudden change. Perfect for a quick overview of the fiber under test, to control field splicing or to check the link before launching an iOLM acquisition.</p>
	 <p><b>Advanced SOR support</b></p> <p>iOLM uniquely delivers full job compliance without compromising on ease of use nor limiting the performance obtained from using dynamic multipulse acquisitions. iOLM manages an unrestricted number of acquisitions for optimal link characterization; simply input the pulse width and averaging time requested for the SOR file report to add it to the results package. Finally, you can consult the reported SOR trace right on iOLM.</p>
	 <p><b>2:N splitter characterization</b></p> <p>The iOLM is the only solution on the market capable of characterizing the 2:N splitter with a clear pass/fail verdict for multi-input or redundancy networks. The iOLM identifies 2:N splitters, as well as both of their input branches, allowing users to accurately document the network with one test (compared to three tests when using traditional methods).</p>
	 <p><b>iOLM expert mode</b></p> <p>iEX is a software option specifically designed for the fiber test expert or manager who requires more flexibility in documenting the trace files for reporting purposes. Because flexibility also means that you can create your own elements with their own icon and specific thresholds to better match your network plans, this option allows you to add extra events, delete events, or re-analyze the trace.</p>
<b>iOLM Pro</b> <sup>b</sup> <b>(iPRO includes iADV and iLOOP)</b>	 <p><b>Multifiber MPO cable characterization and troubleshooting (iMF)</b></p> <p>In combination with an external 1x12 MPO switch (supplied by EXFO), the iOLM allows for faster-than-ever testing of singlemode MPO cables, with no need to use a fan-out cable or cassette. Human manipulation is reduced by 90%, which in turn significantly reduces the risk of error. Thanks to the intelligent multifiber algorithm (iMF), a single push of the Start button initiates a fully automated test sequence of the 12 fibers and results in 12 single measurements.</p>
<b>iLOOP</b> <sup>b</sup>	 <p><b>Loopback testing mode (iLOOP)</b></p> <p>The iLOOP feature allows your iOLM unit to double its testing efficiency by reducing testing time by 50% compared to a traditional unidirectional test method. This intelligent application relies on the loopback single-ended measurement method to characterize two fibers at once. The application splits the results into two individual links, thus eliminating the need for post-processing. iLOOP automatically generates individual iOLM and OTDR (.sor) files, in addition to PDF reports, for all your fibers directly from the field, enabling you to close your job immediately and move on to the next fiber pair faster.</p> <p>This option is particularly efficient for applications such as fiber-to-the-antenna (FTTA), distributed antenna systems (DAS) and data centers, where iLOOP enables you to simultaneously test Rx/Tx fibers with a simple loop jumper between the two fibers. Once the measurement is completed, iLOOP applies pass/fail assessments and generates a report for each single fiber.</p>
<b>iCERT</b> <sup>b</sup>	 <p><b>Data center multistandard certification</b></p> <p>The iCERT option turns the iOLM into an intelligent Tier 2 certifier with automated pass/fail thresholds for SM/MM cables. iOLM iCERT helps fiber installers certify or troubleshoot any enterprise or data center network to multiple cabling and application standards simultaneously. You can therefore certify the cabling according to internationally recognized standards (including TIA-568, ISO 11801), as well as the application that the fiber can carry (including IEEE or Fibre Channel standards).</p> <p>Having predefined cable standards built into the application ensures compliance with test requirements of different standard bodies without risk of error during testing.</p>

a. To see which feature is available for which model, please see the table on the following page.

b. Requires enabling iOLM standard.

PACK/OPTIONS	FEATURES	MaxTester				FTB-1v2/Pro <sup>a</sup>				
		MAX-715B	MAX-720C	MAX-730C	MAX-740C	FTB-720C	FTB-730C	FTB-735C	FTB-740C	FTB-750C
<b>iOLM Standard</b>	Dynamic multipulse multiwavelength acquisition	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Intelligent traces analysis	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Single link view and event table	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Intelligent diagnostics	✓	✓	✓	✓	✓	✓	✓	✓	✓
	SOR trace generation	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Single iOLM file per link for easy reporting	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Unbalanced/tapered PON characterization and troubleshooting	✗	✗	✓	✗	✗	✓	✗	✗	✗
	<b>Optimode:</b> Fast short link	✓	✓	✓	✗	✓	✓	✓	✗	✓
	<b>Optimode:</b> Short-link close events	✗	✓	✓	✗	✓	✓	✓	✗	✓
<b>iOLM Advanced (iADV)<sup>b</sup></b>	Real-time OTDR	✓	✓	✓	✓	✓	✓	✓	✓	✓
	SOR pulse editor	✓	✓	✓	✓	✓	✓	✓	✓	✓
	SOR trace view	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Custom elements	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Advanced link edition and re-analysis	✓	✓	✓	✓	✓	✓	✓	✓	✓
	2:N splitter characterization	✗	✓	✓	✗	✓	✓	✓	✗	✓
	<b>Optimode:</b> SFP safe troubleshooting <sup>c</sup>	✗	✓	✓	✓	✓	✓	✓	✓	✓
	<b>Optimode:</b> PON last-mile certification	✓	✗	✓	✗	✗	✓	✓	✗	✗
<b>iOLM Pro (iPRO includes iADV and iLOOP)<sup>b</sup></b>	Automated MPO cable characterization and troubleshooting (with EXFO switch) (iMF)	✗	✗	✗	✗	✓	✓	✓	✗	✓
<b>iLOOP<sup>b</sup></b>	iOLM loopback	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>iCERT<sup>b</sup></b>	Cabling certification option	✗	✓	✓	✗	✓	✓	✓	✗	✓

a. The FTB-1v2/Pro single and dual carrier now support FTBx modules.

b. Require enabling iOLM standard.

c. Singlemode only, configuration without splitter.

## SPECIALIZE YOUR iOLM WITH OPTIMODES

Optimodes are test configurations tailored to optimize specific use cases and go a step beyond recognized iOLM performances.

### Optimode: Short-link close events

**Application: FTTA, data centers, FTTx**

Tailored to short links with close connectors, this optimode offers the highest resolution achieved so far, and enables technicians to pinpoint which connector is problematic with greater accuracy to fix issues while on-site. This in turn reduces both installation and repair time.

SPECIFICATIONS	720C SERIES	730C/735C/750C SERIES
Maximum link length <sup>a</sup>	2500 m	2500 m
Maximum link loss	8 dB	10 dB
Detection of 5 m patchcord <sup>b, c</sup>	Up to 2.5 dB loss	Up to 3.5 dB loss

- a. Total length, unidirectional or total loopback, including launch, loop and receive fibers.
- b. At 1550 nm, fiber length after reflection <= -55 dB, fiber section before event must be detectable.
- c. Typical.

## Optimode: Fast short link

### Application: FTTA, data centers, enterprise LAN/WAN

Fast short link (FSL) optimode is designed to quickly test short links in high-volume contexts. It tests up to five times faster than any regular iOLM characterization, and provides accurate link loss, length and high-level mapping of the link, all in less than 10 seconds per fiber. The FSL Optimode turns a powerful multipulse-width iOLM test unit into an extremely fast validation tool that enables the quick assessment of short fiber optic links.

SPECIFICATIONS		MAX-715B	720C	730C/735C	750C
Fiber type		Singlemode	Multimode <sup>a</sup>	Singlemode	Singlemode
Maximum link length <sup>b</sup> (m)		2500	800	2500	5000
Maximum link loss	Simplex (dB)	3	4	3	6
	Duplex <sup>c</sup> (dB)	5	6	5	8
Measurement time <sup>d</sup> (s)		< 10			

- a. 850 nm only.
- b. Total length, unidirectional or total loopback, including launch, loop and receive fibers.
- c. Duplex measurement in loopback mode. Requires activating iLOOP.
- d. Typical total time per wavelength, in Simplex and Duplex mode, excluding launch and receive calibration sequence.

## Optimode: PON last-mile certification

### Application: Last-mile FTTx

Tailored to last-mile certification, this optimode tests all connections between customer premises and the splitter (including continuity at the splitter, but excluding elements after the splitter).

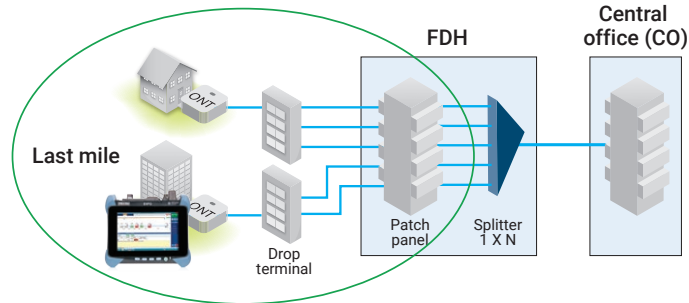


Figure 1. Certification of last-mile FTTH including continuity at splitter.

With traditional last-mile OTDRs, the splitter is indicated as a fiber end. However, just by controlling the distance of the last mile, it is not possible to certify that the splitter is connected.

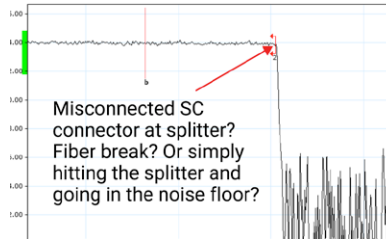


Figure 2. Last-Mile OTDR trace.

This optimode verifies that the last-mile fiber segment is actually connected to the splitter, leaving no uncertainty as to the quality of the installation. In addition, with an OTDR equipped with an singlemode live port, this mode can be used on dark fiber or live networks.

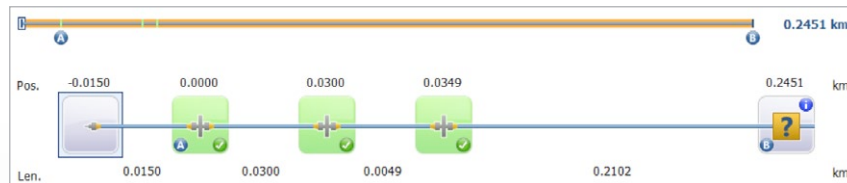


Figure 3. Test fail—Expected splitter not detected. Last mile looks OK but there is either a break or disconnection at splitter.


SPECIFICATIONS		MaxTester 715B	730C/735C SERIES
Measurement time <sup>a</sup> (s)		35	20
Maximum link length (km)		20	20
Maximum last-mile fiber length (km)		5	5
Maximum last-mile fiber loss (dB)		2.5	2.5
Minimum fiber length after splitter or group (in the case of multistage PON)	1:2 splitter	30 m	25 m
	1:4 splitter	150 m	100 m
	1:8 splitter	400 m	150 m
	1:16 splitter	1500 m	400 m
	1:32 splitter	4500 m	1000 m
	1:64 splitter	—	3000 m

a. For a single-stage splitter, single wavelength, typical.

## Optimode: SFP safe troubleshooting

### Application: Point-to-point troubleshooting up to 100 km

Ideal for point-to-point troubleshooting when an equipment is supposed to be active on the far end. When technicians are dispatched on-site, they are still unaware of what is wrong and may accidentally damage a transceiver with an uncontrolled pulse width. EXFO's patented solution prevents this risk and guarantees no damages to the SFP while troubleshooting, yielding cost savings and faster time to recovery.

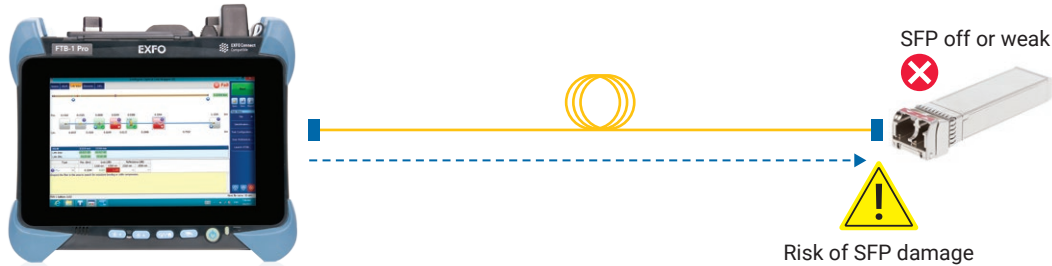

## LOOPBACK MEASUREMENT USING EXFO PLATFORMS AND TEST METHODOLOGY

Test methodology	iOLM		OTDR
	Unidirectional	Bidirectional	Unidirectional and bidirectional
MAX-700B/C	iLOOP	iLOOP <sup>a</sup>	FR: PC
FTB-1/2/4	iLOOP	iLOOP <sup>a</sup>	FR: PC/FTB
FTB-500	iLOOP	iLOOP <sup>a</sup>	FR: PC/FTB

*iLOOP = Loopback measurement achieved immediately in the field via iOLM iLOOP option.*

*FR:PC/FTB = Loopback measurement achieved via post-processing in FastReporter software using a PC at the office, or using the FTB platform in the field.*

*FR:PC = Loopback measurement achieved via post-processing in FastReporter software using a PC at the office.*

a. For singlemode fibers only. Bidirectional loopback measurement for multimode fibers achieved via post-processing in FastReporter software using a PC at the office, or using an FTB platform in the field.



*Using the loopback test method and iLOOP option on your iOLM enables you to test two fibers at once. View only the A link, B link, or the complete A-B link including the loop.*

## RECOMMENDATIONS

### Angled polished connectors (APC) on a singlemode port

Like any OTDR, the iOLM will be affected by strong reflections at the unit's port. To ensure low reflection and maintain measurement accuracy, the iOLM singlemode port must be used with APC connectors. Another advantage of using APC connectors is their ability to handle harsher conditions without becoming highly reflective, while maintaining the unit's performance.

On the other hand, ultra-polished connectors (UPCs) are prone to being highly reflective when contaminated, worn, or damaged. This affects singlemode measurement and leads to premature connector replacement. Although a UPC unit is not required for testing of a UPC network, using an APC/UPC test jumper or a launch fiber (SPSB) ensures compatibility.



## Test method

EXFO recommends using a 150-meter launch cable (SPSB) to compensate for the loss of the iOLM's connector, or to allow UPC network testing. This will also extend the instrument's connector life by reducing the number of matings—ultimately improving cost of ownership.



## TROUBLESHOOTING OF HIGH-SPEED MULTIMODE NETWORKS WITH ENCIRCLED FLUX



Whether for an expanding enterprise-class business or a large-volume data center, new high-speed data networks built with multimode fibers are running under tighter tolerances than ever before. In the event of failure, intelligent and accurate test tools are needed to quickly find and fix the fault.

Multimode fibers are the trickiest links to test, because the test results are highly dependent on each device's output conditions. Troubleshooting with a unit other than the construction unit may mislead the technician or result in the inability to find the fault, creating longer network downtimes.

For multimode fibers, EXFO recommends using an external launch mode conditioner that is Encircled Flux (EF)-compliant. The EF standard (as recommended in TIA-568 via TIA-526-14-B and IEC 61280-4-1 Ed. 2.0) is a way of controlling the source launch conditions so that tier-2 troubleshooting can be performed with maximum accuracy and consistency.

Use of an external EF-compliant device\* such as the SPSB-EF-C30 is a fast and easy way to fix faulty networks.

\* For more information about EF compliance, please read the Encircled Flux test solution specification sheet.

## THE BENEFITS OF APC CONNECTORS FOR OTDR/iOLM TESTING



To maximize the performance of your OTDR, EXFO recommends using APC connectors on singlemode ports. These connectors generate lower reflectance, which is a critical parameter that affects performance, particularly in dead zones. APC connectors provide better performance than UPC connectors, thereby improving testing efficiency.

For best results, APC connectors are mandatory on singlemode ports when using the iOLM application.

## ORDERING INFORMATION

To configure your new instrument with iOLM, please refer to the ordering guide available on the spec sheet of the selected model:  
[www.exfo.com/products/field-network-testing/bu3-optical/otdr-iolm-testing](http://www.exfo.com/products/field-network-testing/bu3-optical/otdr-iolm-testing)

### To upgrade your OTDR/iOLM-ready instrument <sup>a</sup>:

XX-XX

#### Base software <sup>a</sup>

- Oi = Enables iOLM standard application in addition to your existing OTDR application
- Oi2 = Converts your existing OTDR software into an iOLM software
- 00 = No change to your current base software

#### iOLM Software Option <sup>b</sup>

- 00 = iOLM Standard software
- iADV = Enables iOLM Advanced
- UPG-iADV-iPRO = Converts your existing iOLM Advanced into iOLM Pro <sup>c</sup>
- iPRO = Enables iOLM Pro <sup>c</sup>
- iLOOP = Enables loopback testing mode
- iCERT = Enables iOLM tier-2 cabling certification

Example: Oi-iPRO-iCERT

a. For iOLM-ready instruments only (look for the "iOLM-ready" sticker on your unit or contact EXFO); if your instrument is not iOLM-ready, please contact EXFO for upgrades options.

b. Requires iOLM base software.

c. iOLM Pro includes iOLM Advanced and iLoop; iPRO not available for MAX-700B/C and 740C/Gv2.

**EXFO headquarters** T +1 418 683-0211 **Toll-free** +1 800 663-3936 (USA and Canada)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to [www.EXFO.com/contact](http://www.EXFO.com/contact).

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to [www.EXFO.com/specs](http://www.EXFO.com/specs).

In case of discrepancy, the web version takes precedence over any printed literature.