

**KDE-UBECUVC KDE DIRECT UAS UBEC  
PRODUCTION RELEASE**



**Specifications:**

2S-14S Capable (60.3V Max), 10A Continuous (25A+ Peak) UBEC, Voltage Filtering and Digital Monitoring Circuitry 5V/6V/8V/12V Selectable Voltage

8" (210mm) Power Lead Extensions (16AWG, Red/Black) 2.0mm Exposed Wire Pre-Soldered and Clear Shrink Wrap

8" (210mm) High Current Output Leads (16AWG, Yellow/Black) 2.0mm Exposed Wire Pre-Soldered and Clear Shrink Wrap

(6) Servo Output JST-Style Male Pin-Outs 3.3 Continuous Amps Per Channel





**Voltage Selection | Total Current Limitation**

- 5V - 22A
- 6V - 22A
- 8V - 21A
- 12V - 18A

**Aluminum Case (Black Anodize, CNC Machined Features)**

**REVISIONS**

REV.	DESCRIPTION	DATE	APPROVED
A	Original production release. Starting serial number S/N 12E190001.	04/16/2019	KDE

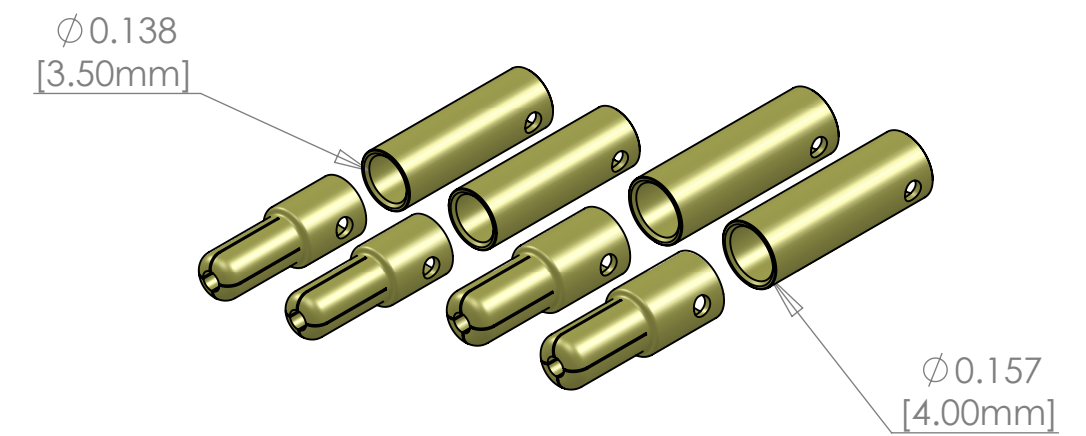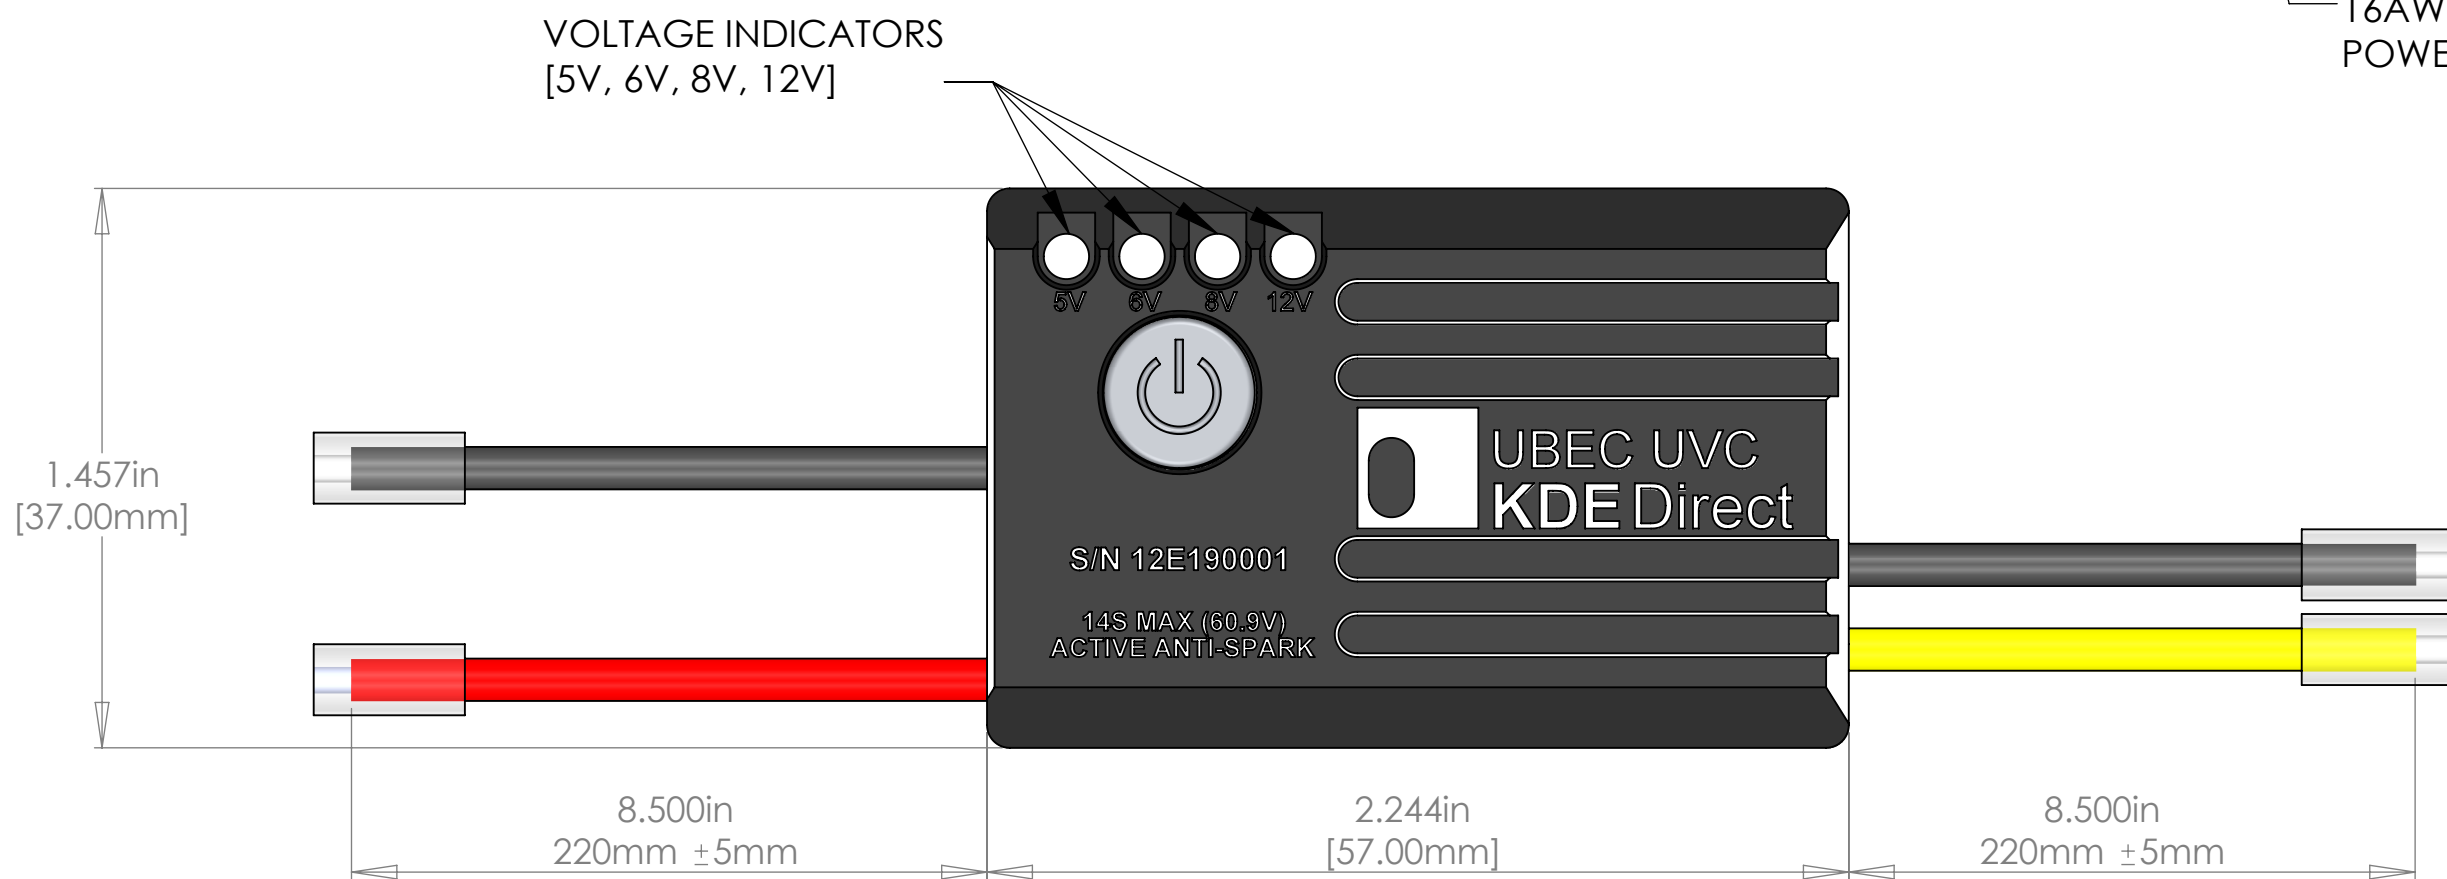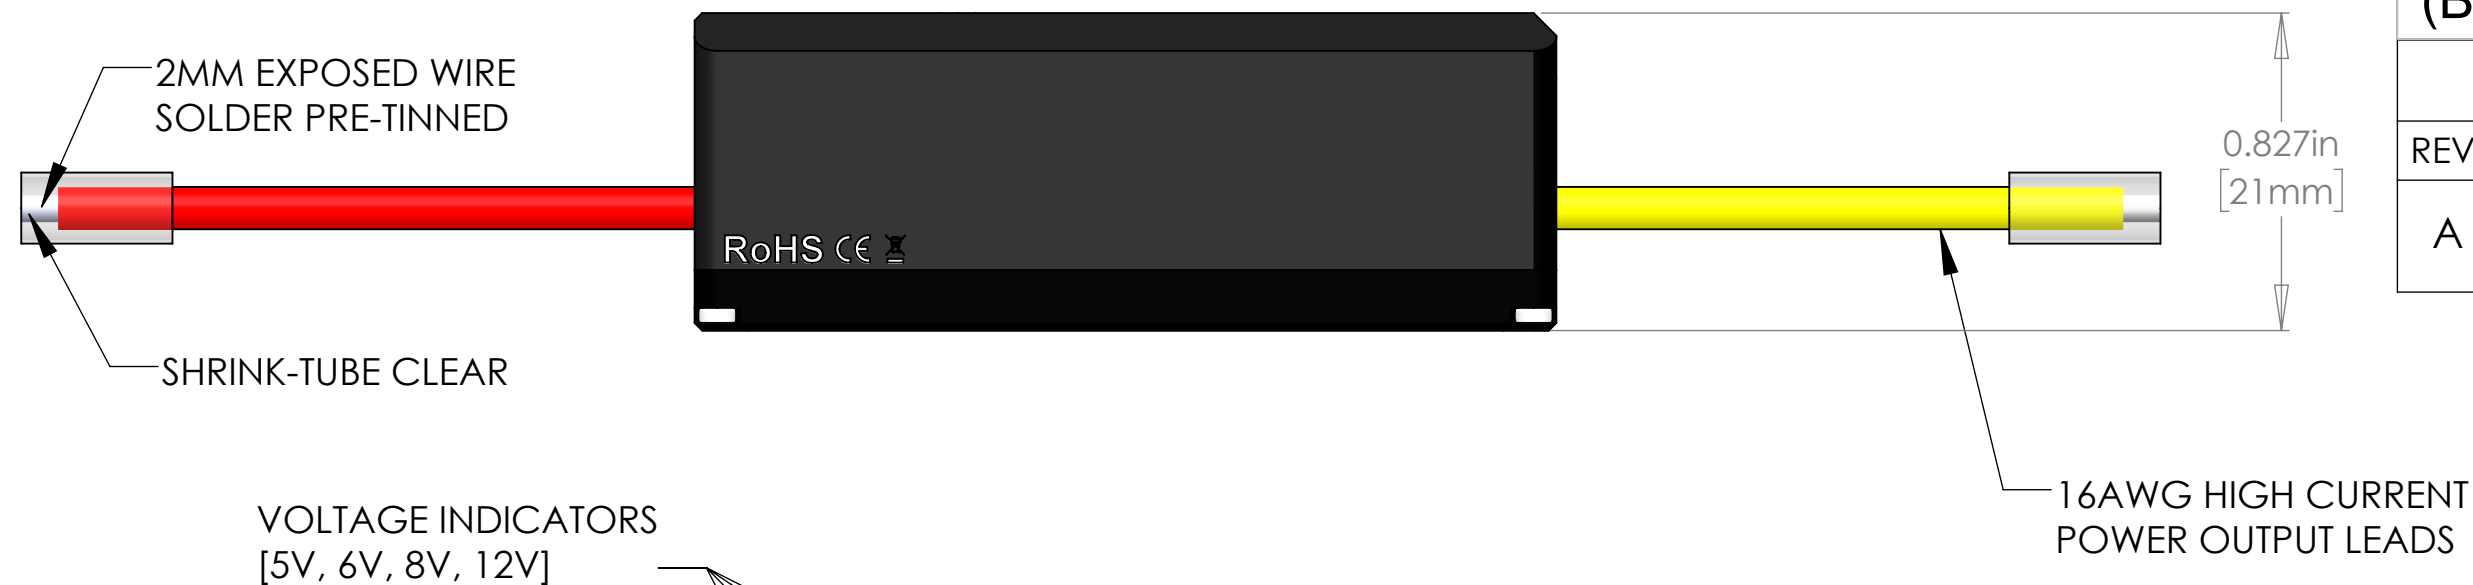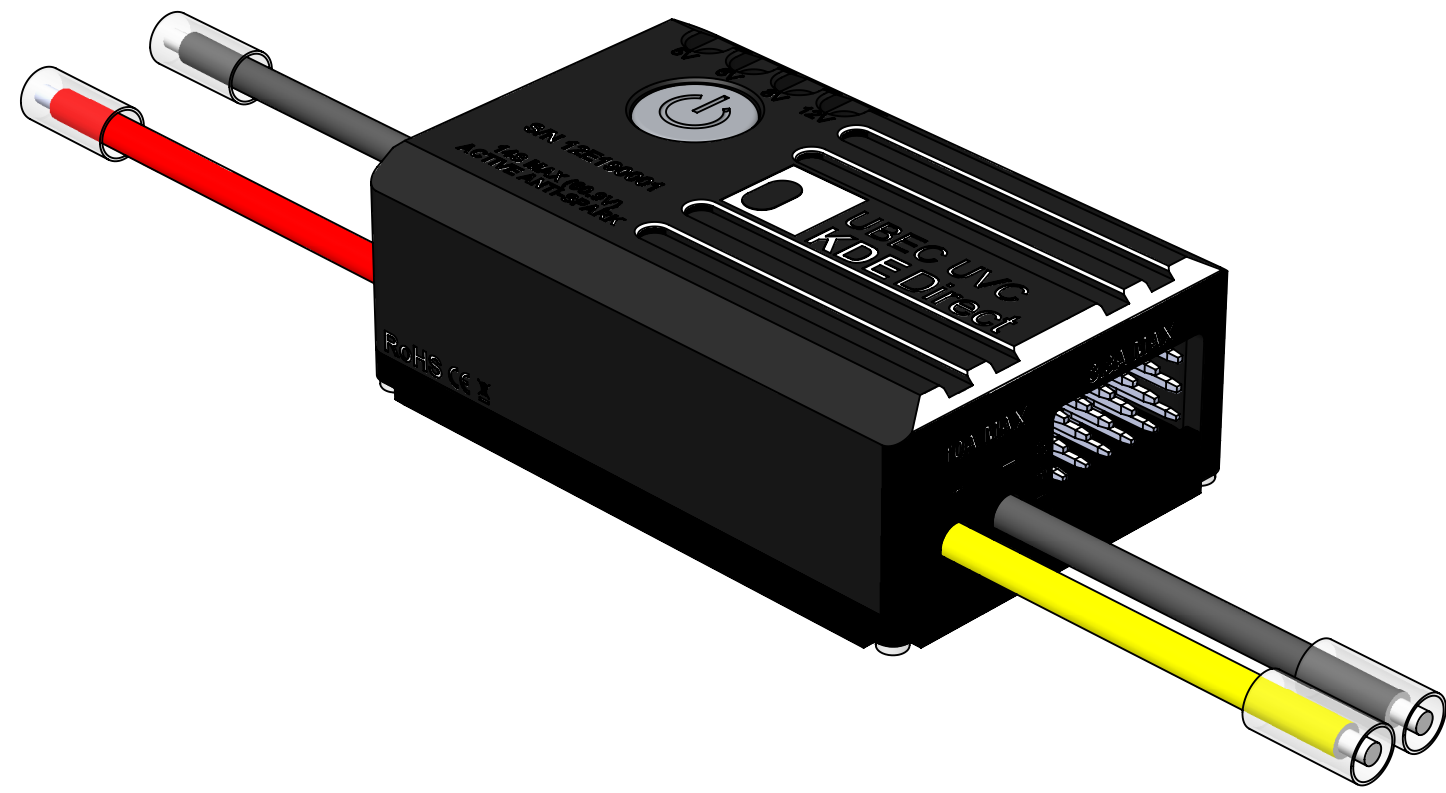

**3.5MM BULLET CONNECTORS 24K, MATCHING PAIR (2 SETS)**

**4.0MM BULLET CONNECTORS 24K, MATCHING PAIR (2 SETS)**