

**KDE13218XF-105 (HE) KDE DIRECT BRUSHLESS MOTOR
PRODUCTION RELEASE**



Specifications:

Ø 15mm Core Shaft
Ø 10mm, 9.5mm Extended Length
- Shaft Flush with Retaining Collar



6902-2RS Upper Bearing (Ø 15mm x Ø 28mm x 7mm)
- Single Upper Radial Ball Bearing
7902C Upper Bearing (Ø 15mm x Ø 28mm x 7mm)
- Single Upper Angular Contact Ball Bearing
7202C Lower Bearing (Ø 15mm x Ø 35mm x 11mm)
- Single Lower Angular Contact Ball Bearing
- All Bearings NSK-BRAND, HPS Series (if Available)

Triple 90° Pattern Threads:
M6 Threads x Ø 70mm Spacing
M5 Threads x Ø 70mm Spacing
M5 Threads x Ø 55mm Spacing

Double 90° Pattern Threads:
M5 Threads x Ø 25mm Spacing
M3 Threads x Ø 20mm Spacing

30" Exit Lead Extensions (10 AWG)
Ø 4.0mm 24k Bullets, Pre-Soldered and Shrink Wrap

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Production Release.	04/01/2019	KDE

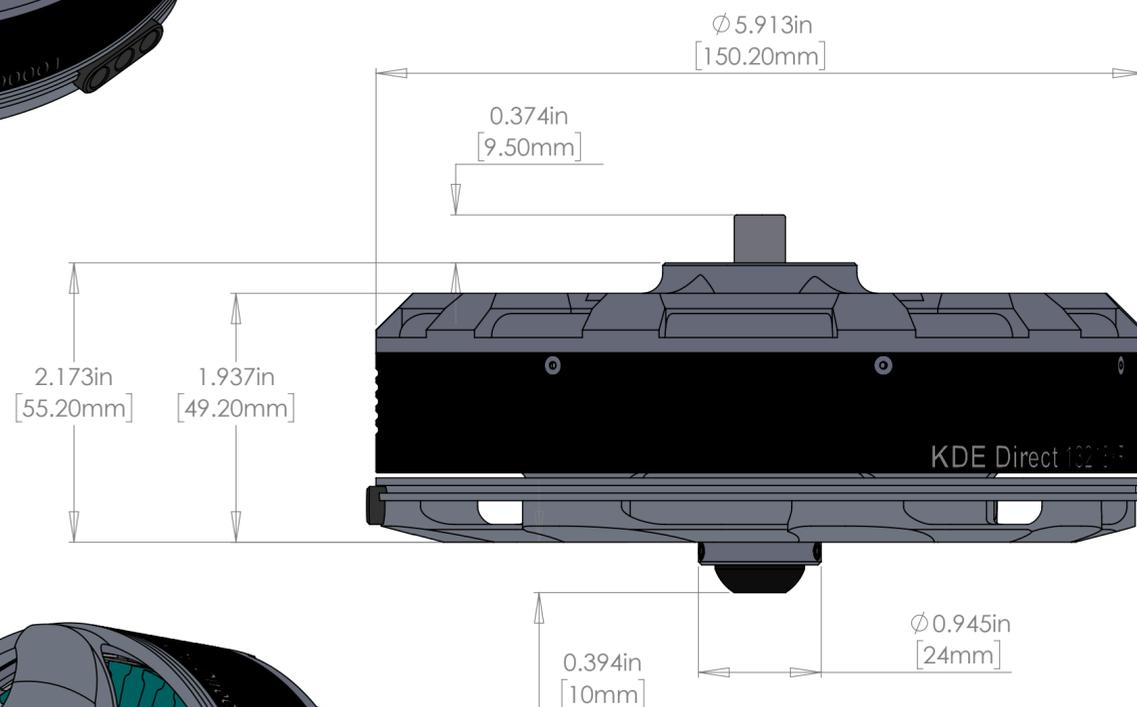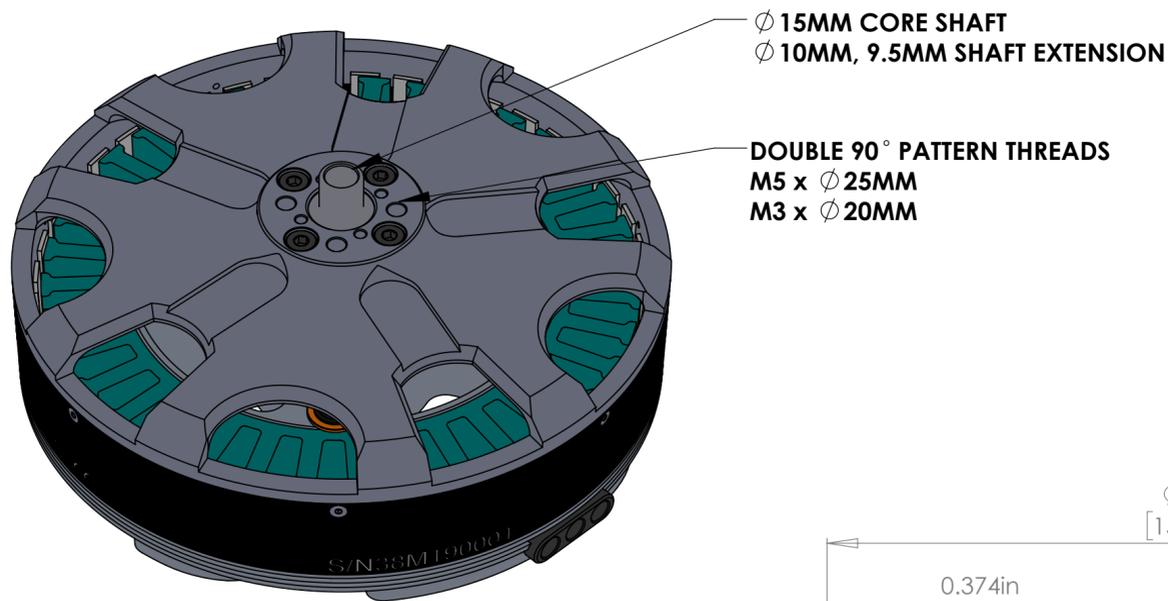

OVERSIZED 7202C
NSK-BRAND, HPS SERIES
ANGULAR-CONTACT
BALL BEARING

SHAFT MACHINED FLUSH
TO COLLAR

BEARING COVER

BUTTON HEAD SOCKET CAP SCREW
RETAINER (M10 x 1.5 x 12MM)

TRIPLE 90° PATTERN THREADS
M6 x Ø 70MM
M5 x Ø 70MM
M5 x Ø 55MM

