

KDE DIRECT 23XX-FPVR SERIES COMPONENTS V2

KDE2306XF-2050


KDE2306XF-2550



**KDE M5 PROPELLER ADAPTER ASSEMBLY V2
23XX/18XX SERIES
9MM EDITION, RH THREAD**

SOCKET HEAD CAP SCREWS
M2 X 0.4 X 5MM (4)
ALLOY-STEEL BLACK OXIDE, C12.9

FLANGED NYLON-INSERT LOCKNUT
M5 X 0.8 X 5.5MM (1)
ALUMINUM 6061-T6, BLACK-ANODIZE

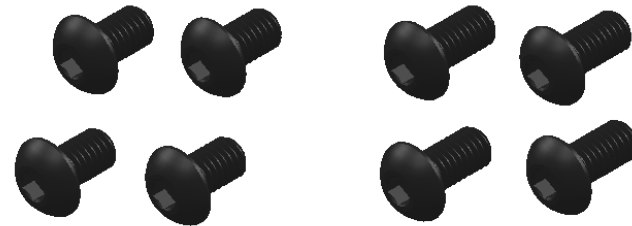

MOUNTING HARDWARE

BUTTON HEAD SOCKET HEAD CAP SCREWS
M3 X 0.5 X 5MM (4)
ALLOY-STEEL BLACK OXIDE, C12.9

BUTTON HEAD SOCKET HEAD CAP SCREWS
M3 X 0.5 X 6MM (4)
ALLOY-STEEL BLACK OXIDE, C12.9

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS APPLY BEFORE PLATING OR COATING.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .020 IN MAX.

IMPERIAL

THIRD ANGLE PROJECTION



TOLERANCES.
X. ± 0.040"
X.X ± 0.020"
X.XX ± 0.010"
X.XXX ± 0.005"
ANGULAR ± 1°

DESIGNED	KDE DIRECT
DRAWN	KDE DIRECT
DATE	XX/XX/XXXX

TITLE. **KDE DIRECT 23XX-FPVR COMPONENTS V2**

SIZE PART NO. **KDE23XX-FPVR SERIES**

REV. **A**

DO NOT SCALE DRAWING

SCALE: 4:1 SHEET 1 OF 1