KDE700XF-455 KDE DIRECT XF BRUSHLESS MOTOR, GEN3 **PRODUCTION RELEASE**

6

5


4

7

8

D

8

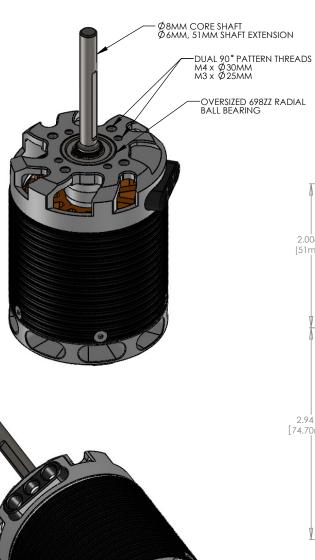


7

6

5

4

3

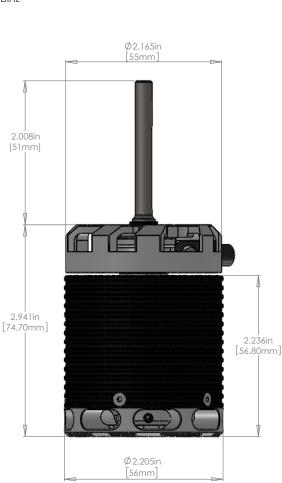

KDE DIRECT XF BRUSHLESS MOTOR SPECS.

2

1

D

С

Ø8mm Core Shaft

3

 ϕ 6mm, 51mm Extended Length - Shaft Flush with Centrifugal Fan Surface

698ZZ Upper Bearing (ϕ 8mm x ϕ 19mm x 6mm) MR148ZZ Lower Bearings (ϕ 8mm x ϕ 14mm x 4mm) - Triple Lower Bearings

Dual 90° Pattern Threads: M4 Threads x Ø30mm Spacing M3 Threads x Ø25mm Spacing

150mm Exit Lead Extensions (10 AWG) \emptyset 6.5mm 24K Bullets, Pre-Soldered and Shrink Wrap



150.0mm exit lead extensions (10 AWG) ϕ 6.5mm male bullets pre-soldered

2



www.KDEDirect.com KDE700XF-455-G3

1