
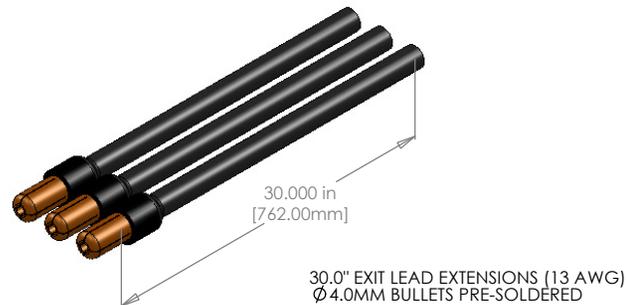
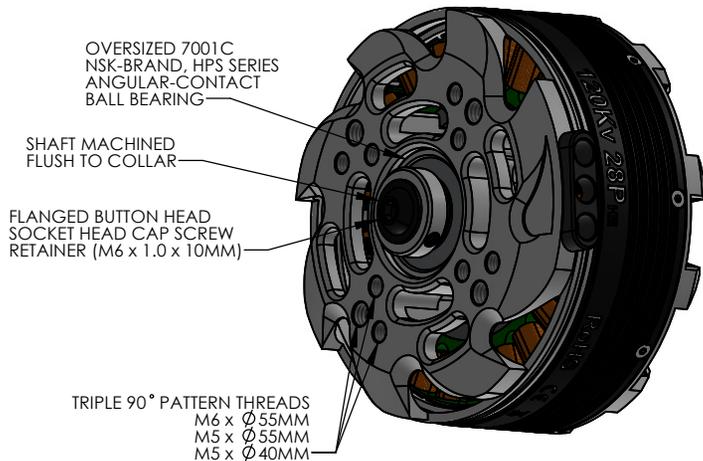
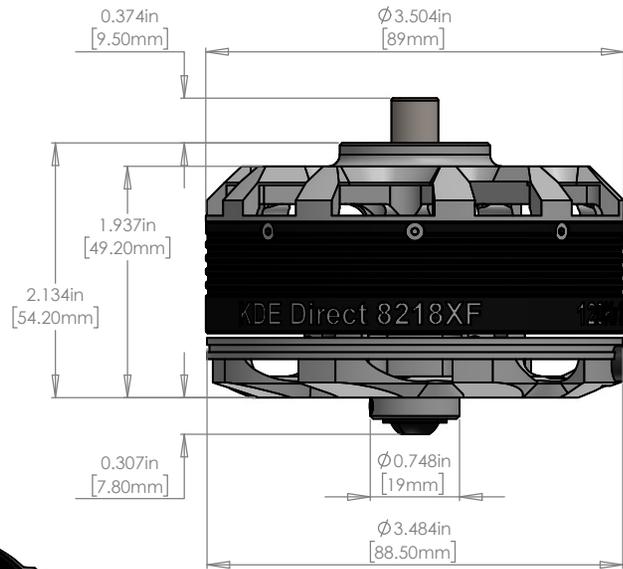


**KDE8218XF-120 (HE) KDE DIRECT UAS BRUSHLESS MOTOR
PRODUCTION RELEASE**

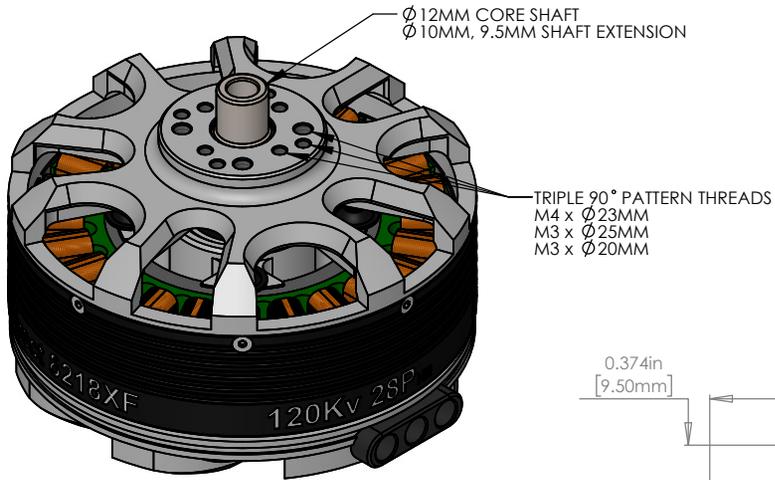

KDE DIRECT UAS BRUSHLESS MOTOR SPECS.

- ϕ 12mm Core Shaft
- ϕ 10mm, 9.5mm Extended Length
- Shaft Flush with Retaining Collar

- 6901-2RS Upper Bearing (ϕ 12mm x ϕ 24mm x 6mm)
- Single Upper Radial Ball Bearing
- 7901C Upper Bearing (ϕ 12mm x ϕ 24mm x 6mm)
- Single Upper Angular Contact Ball Bearing
- 7001C Lower Bearing (ϕ 12mm x ϕ 28mm x 8mm)
- Single Lower Angular Contact Ball Bearing
- All Bearings NSK-BRAND, HPS Series

- Triple 90° Pattern Threads:
- M6 Threads x ϕ 55mm Spacing
 - M5 Threads x ϕ 55mm Spacing
 - M5 Threads x ϕ 40mm Spacing

- Triple 90° Pattern Threads:
- M4 Threads x ϕ 23mm Spacing
 - M3 Threads x ϕ 25mm Spacing
 - M3 Threads x ϕ 20mm Spacing

- 30" Exit Lead Extensions (13 AWG)
- ϕ 4.0mm 24k Bullets, Pre-Soldered and Shrink Wrap



www.KDEDirect.com
KDE8218XF-120