


**KDEXF-UAS20LV KDE DIRECT XF UAS ESC, 20A+ LV
PRODUCTION RELEASE**

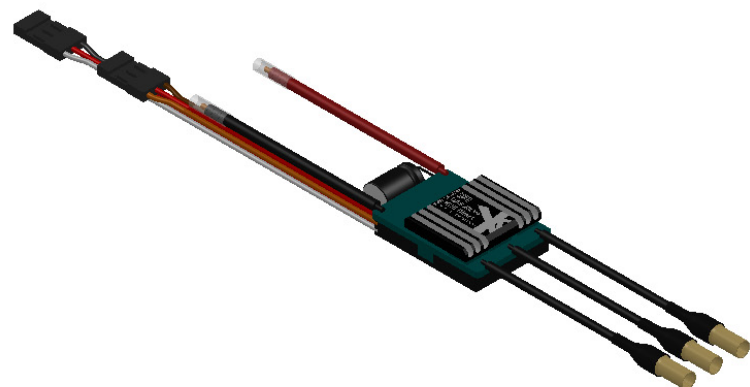

KDE DIRECT XF UAS ESC SPECIFICATIONS

2S-6S Capable (25V Max), 20A+ Continuous
600Hz Refresh Rate, Opto-Isolation (Multi-Rotor Firmware)

4" (100mm) Power Lead Extensions (16 AWG, Red/Black)
2.0mm Exposed Wire, Pre-Soldered and Clear Shrink Wrap

4" (100mm) Motor Lead Extensions (18 AWG, Black)
Ø 3.5mm Female 24k Bullets, Pre-Soldered and Shrink Wrap

5" (125mm) Programming Lead Extension (22 AWG)
JR Connector, 3-Wire Installed (Orange/Red/Brown)

9" (225mm) Control Lead Extension (22 AWG)
JR Connector, 3-Wire Installed (White/Red/Black)

Die-Cut Foam Backing, High-Temp 0.050" Shrink Tube Case

2MM EXPOSED WIRE
SOLDER PRE-TINNED


Ø 3.5MM
FEMALE CONNECTORS

SHRINK TUBE CLEAR

SHRINK TUBE BLACK

PROGRAMMING LEAD
JR CONNECTOR
ORANGE/RED/BROWN

CONTROL LEAD
JR CONNECTOR
WHITE/RED/BLACK

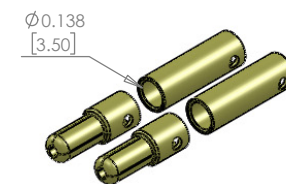

**3.5MM BULLET CONNECTORS
24K, MATCHING PAIR (2 SETS)**

1.594in
[40.50mm]

0.886in
[22.50mm]

4.000 in
100mm ±5mm

4.000 in
100mm ±5mm

5.000 in
125mm ±5mm

1.260in
[32mm]

9.000 in
225mm ±5mm

0.404in
[10.25mm]



ALUMINUM 6061-T6 HEATSINK



DIE-CUT FOAM BACKING



www.KDEDirect.com

www.KDEDirect.com
KDEXF-UAS20LV