
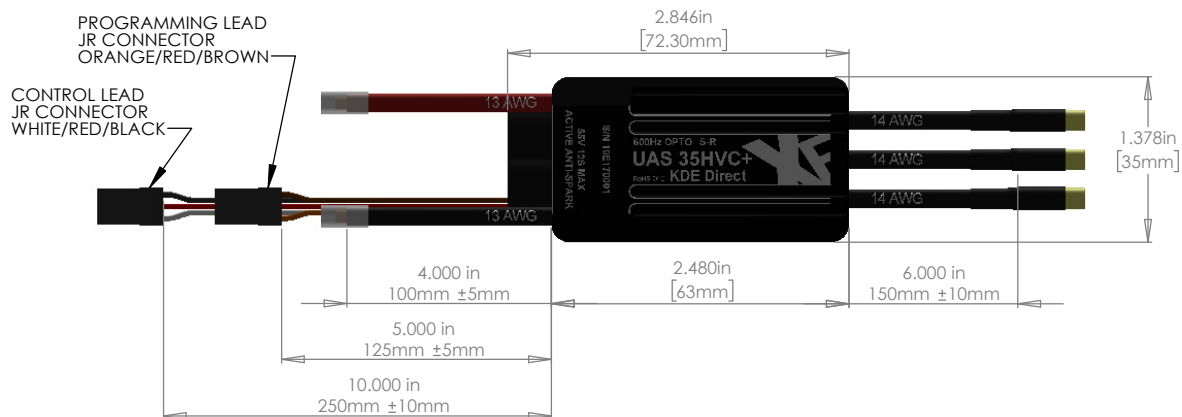
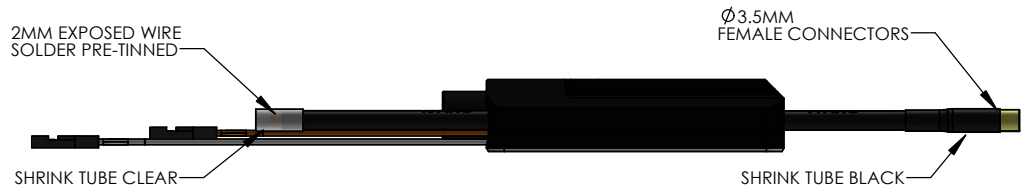


**KDEXF-UAS35HVC KDE DIRECT XF UAS ESC, 35A+ HV
PRODUCTION RELEASE, IP56-RATING**

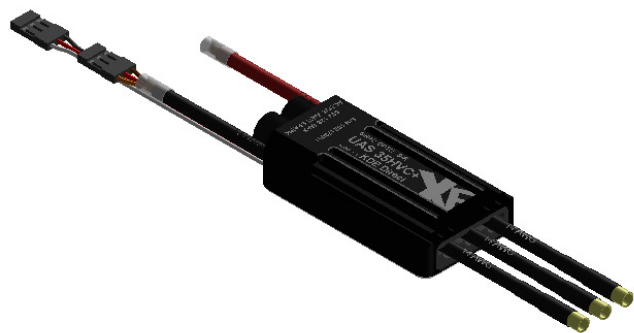

KDE DIRECT XF UAS ESC SPECIFICATIONS

3S-12S Capable (55V Max), 35A+ Continuous
600Hz Refresh Rate, Opto-Isolation (Multi-Rotor Firmware)
Anti-Spark MOSFET Circuitry (S-R Designation)

4" (100mm) Power Lead Extensions (13 AWG, Red/Black)
2.0mm Exposed Wire, Pre-Soldered and Clear Shrink Wrap


6" (150mm) Motor Lead Extensions (14 AWG, Black)
Ø 3.5mm Female 24K Bullets, Pre-Soldered and Shrink Wrap

5" (125mm) Programming Lead Extension (22 AWG)
JR Connector, 3-Wire Installed (Orange/Red/Brown)

10" (250mm) Control Lead Extension (22 AWG)
JR Connector, 3-Wire Installed (White/Red/Black)

Aluminum Case (Black Anodize, CNC Machined Features)

Molded Grommets at Power and Motor Lead Extension Exits

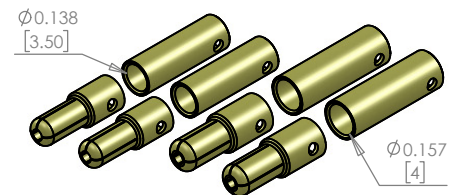

**3.5MM BULLET CONNECTORS
24K, MATCHING PAIR (2 SETS)**


**4.0MM BULLET CONNECTORS
24K, MATCHING PAIR (2 SETS)**



ALUMINUM CASES (6061-T6)



MOLDED GROMMETS (RUBBERIZED POLYMER)



**www.KDEDirect.com
KDEXF-UAS35HVC**