Cuisinart

5 Burner Gas Grill

ASSEMBLY INSTRUCTIONS

Model GAS2556AS



ASSEMBLY INSTRUCTIONS:

A READ ALL SAFETY WARNINGS & ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING OR OPERATING YOUR GRILL.

WE RECOMMEND TWO PEOPLE WORK TOGETHER WHEN ASSEMBLING THIS UNIT.

The following tools are required to assemble this Cuisinart 5 Burner Gas Grill:

Phillips Screwdriver

PARTS LIST:


(1) 1	Left Side	Table
-------	-----------	-------

- (2) 1 Grill Body
- (3) 1 Right Side Table
- (4) 1 Left Side Control Panel
- (5) 1 Warming Rack
- (6) 1 Right Side Control Panel
- (7) 1 Grease Cup
- (8) 3 Cooking Grates
- (9) 1 Side Burner Knob
- (10) 5 Heat Tents
- (11) 1 Grease Tray
- (12) 1 Back Panel


- (13) 1 Tank Block Bar
- (14) 1 Side Burner Grate
- (15) 1 Door Stopper
- (16) 2 Door Handles
- (17) 1 Left Side Panel
- (18) 1 Cart Base
- 19 1 Door Frame
- (20) 1 Right Side Panel
- (21) 4 Casters
- (22) 2 Griddle Brackets
- (23) 1 Griddle
- 24) 1 Temperature Gauge
- (25) 1 Bezel

Note: Most hardware is pre-attached to the grill. You may need to loosen some screws partially while others may need to be removed in order to assemble parts. The screws that you remove will be re-used so don't misplace this hardware.

Extra screws are included in a small bag with the owners manual.

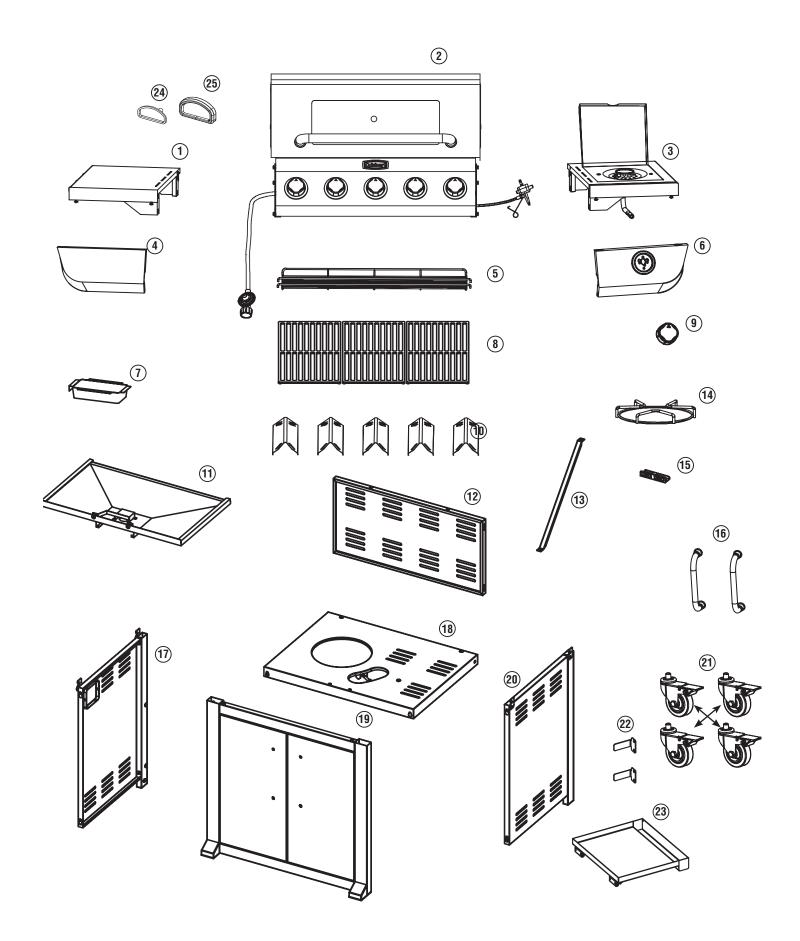



- Remove two screws and door spacers from each door handle 6.
- Attach door handles to doors in door frame using four screws.

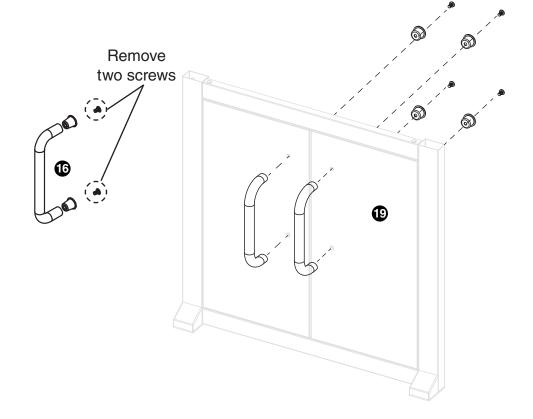


Step 2

 Remove two screws from door frame ¹⁹. Set aside for later use.

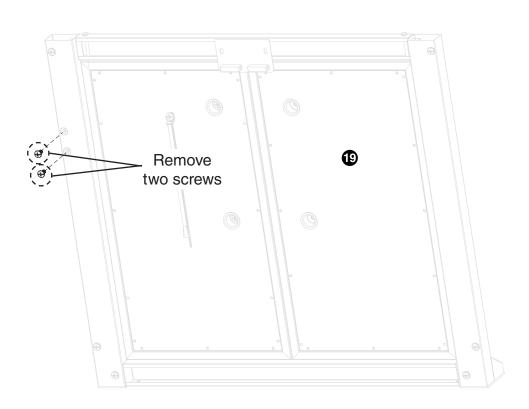

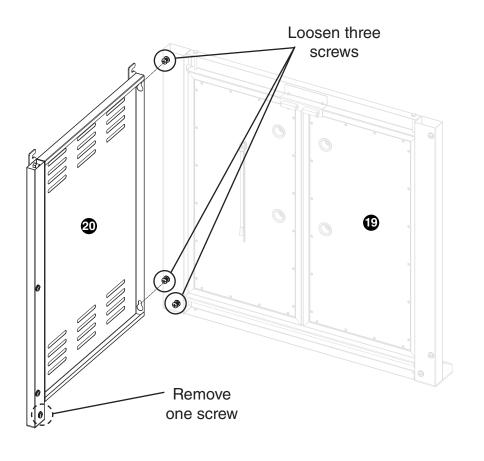


- Loosen three screws on door frame 19.
- Attach right side panel 20 to door frame 19 over keyholes and tighten screws.
- Remove one screw and set aside.

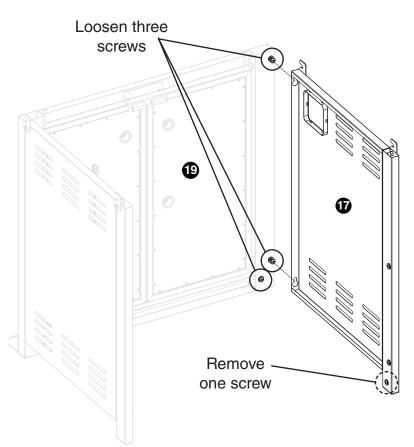


- Loosen three screws on door frame
- Attach left side panel to door frame over keyholes and tighten screws.
- Remove one screw and set aside.

- Loosen four screws on cart side panels.
- Attach back panel
 to cart over
 keyholes and
 partially tighten
 screws.
- Do not fully tighten screws at this time.

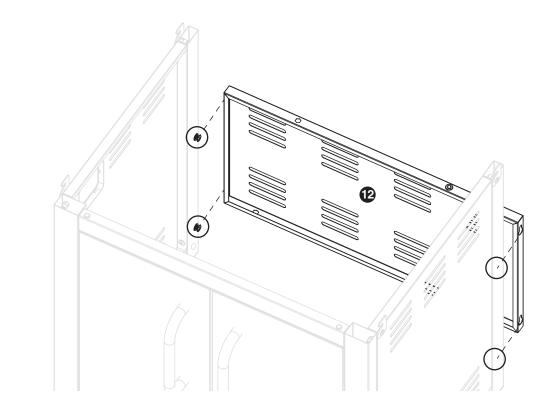


Step 6


• Remove two screws from cart base **18**.

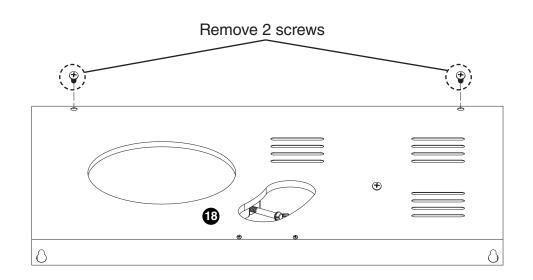


- Attach cart base
 to cart using two pre-attached screws and two screws removed from Steps 3 and 4.
- Tighten all screws on cart base 18.

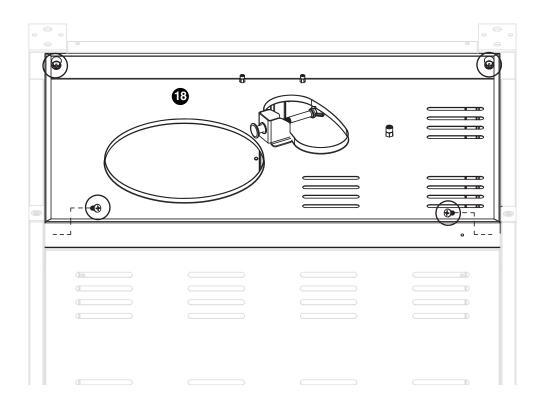


- Lock casters 21.
 - Attach casters **21** to legs



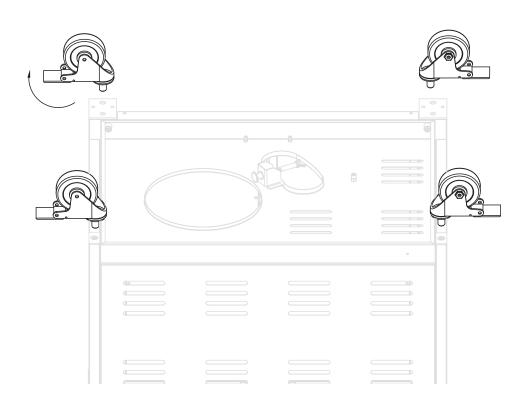


- Attach back panel
 using two screws removed from Step
 5.
- Tighten the four screws from Step 4.

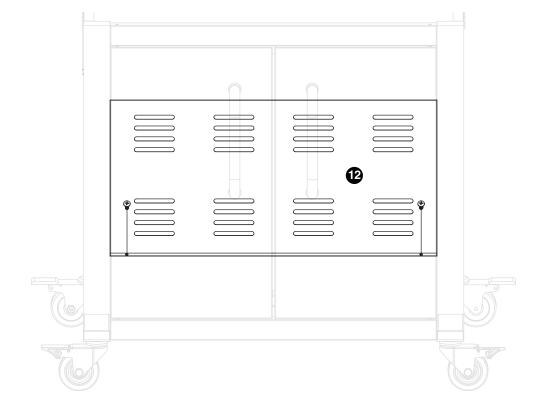


Step 10


 Attach tank block bar ³ to cart using two preattached screws.

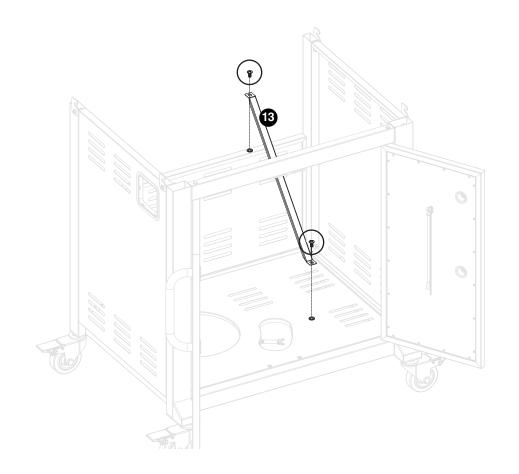


 Attach door stopper to cart base using two pre-attached screws.

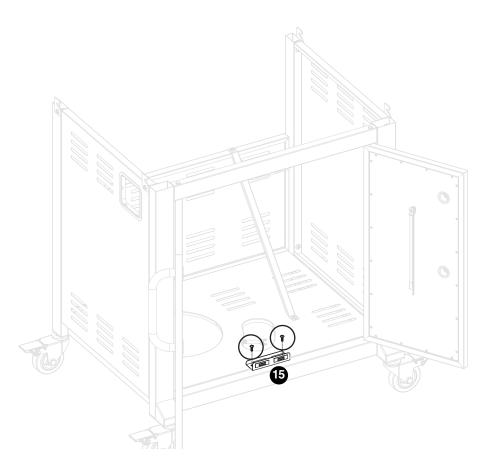

- Attach one griddle bracket 2 to right side panel using two pre-attached screws.
- Attach the other griddle bracket to door frame using two screws removed in Step 2.
- Griddle can be stored on brackets inside cart.

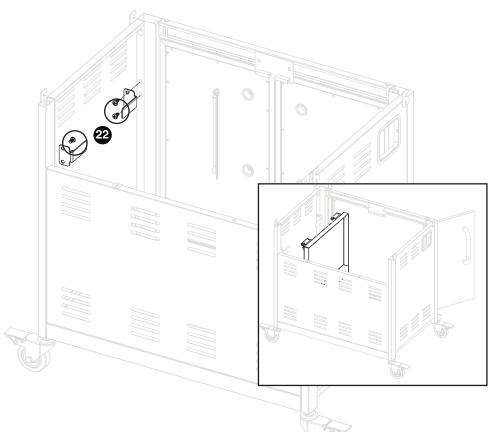

Attach bezel and temperature gauge 4 to hood using pre-attached wing nut and washer.

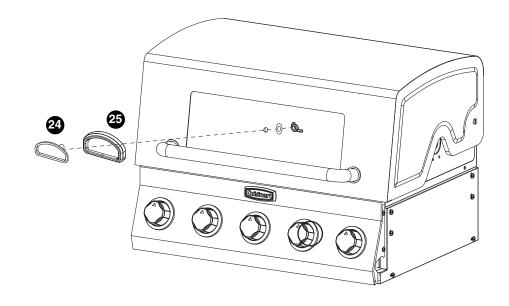


Step 14

LEFT SIDE


- Loosen six screws.
- Remove protective bracket.
- Remove 1 screw.

RIGHT SIDE


- Loosen six screws.
- Remove protective bracket.
- Remove 1 screw.

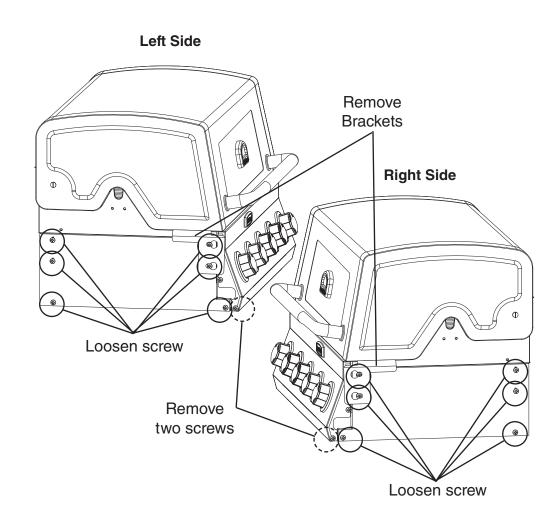


Place grill body assembly 2 on cart.

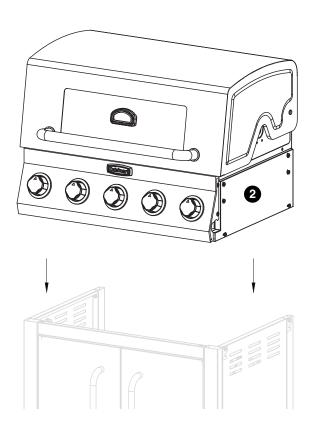


- Loosen screws and rotate brackets upwards.
- Tighten screws.
- Repeat on both sides of grill body.

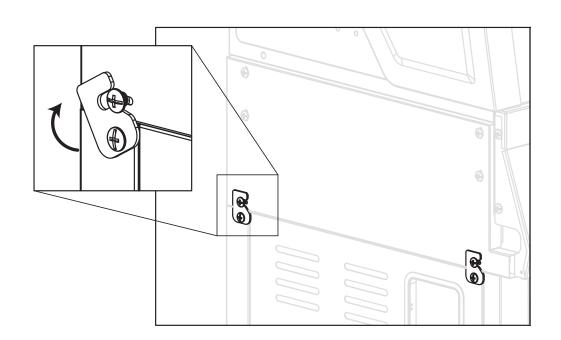


 Remove two screws and washers and set aside.

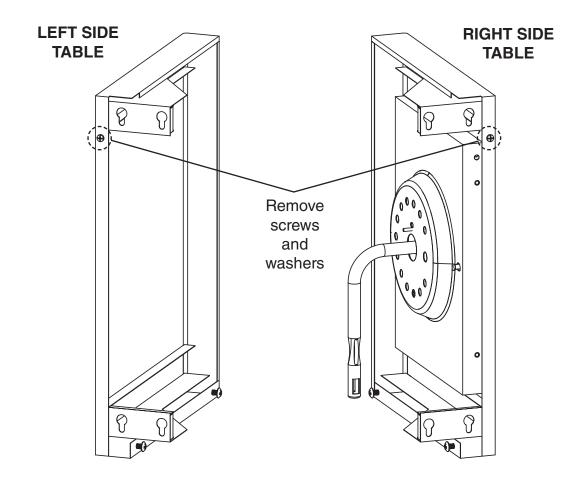


- Loosen 4 screws.
- Attach left and right front control panels 4 and 6 over keyholes.
- Tighten screws.

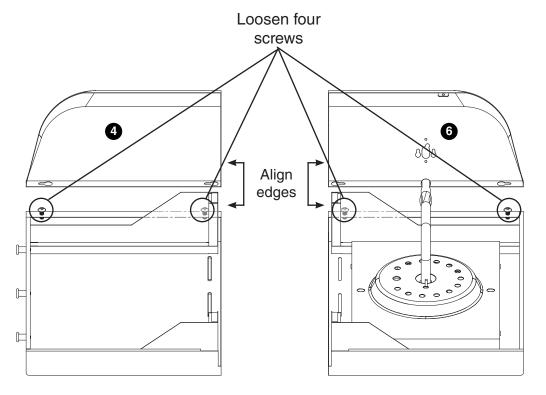

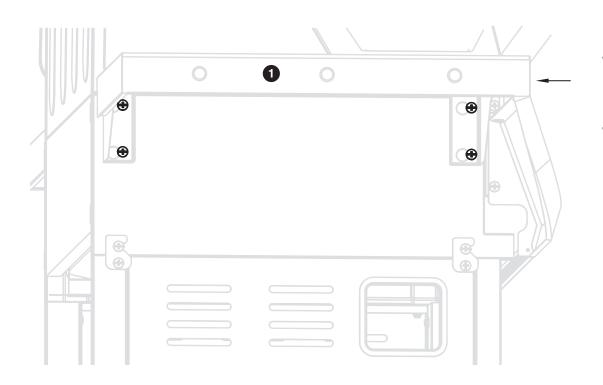


- Attach left side table 1 over keyholes.
- Do not tighten screws at this point in time.

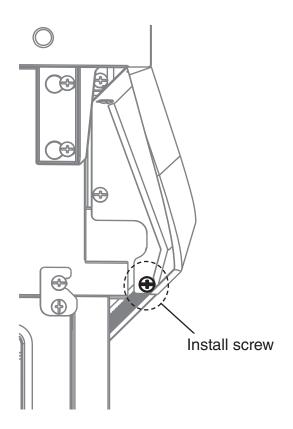


- Install screw. (screw was removed in Step 14)
- Do not tighten screw at this time.


- Install screw and washer (screw and washer were removed in Step 17). Do not tighten screw at this time.
- Make sure panels are aligned.
- Tighten 6 screws from Steps 19 through 21.

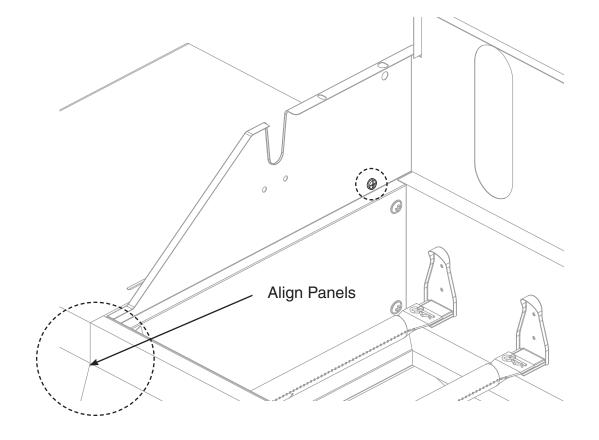


- Attach right side table 3 over keyholes.
- Do not tighten screws at this time.

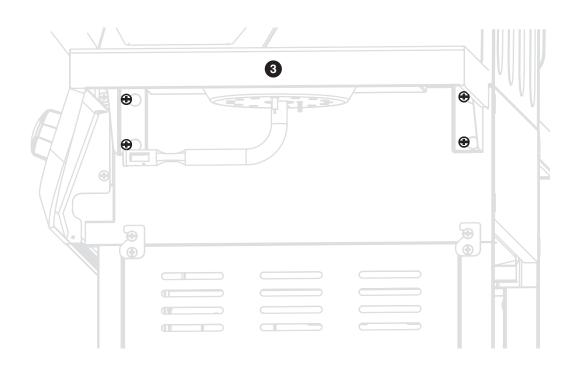


- Install screw. (screw was removed in Step 14)
- Do not tighten screw at this time.

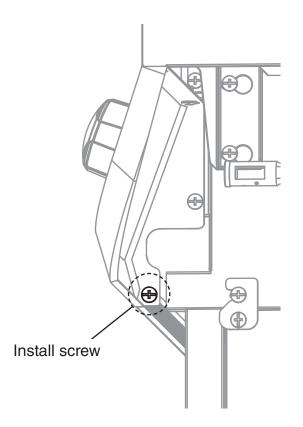

- Install screw and washer (screw and washer were removed in Step 17). Do not tighten screw at this time.
- Make sure panels are aligned.
- Tighten 6 screws from Steps 22 through 24.

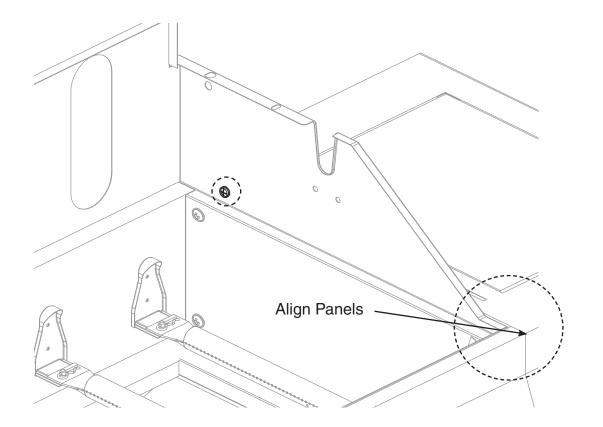


- Remove wing nut and remove burner. Install side burner valve in control panel.
- Slide valve downward and tighten two screws to lock into place (see diagram Step 26)
- Install burner and make sure burner venturi fits over valve nozzle.
- Tighten wing nut.

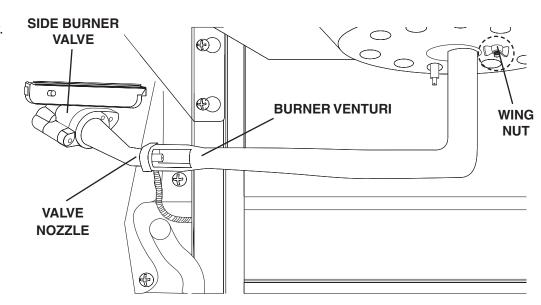


Step 26

Install side burner knob 9.

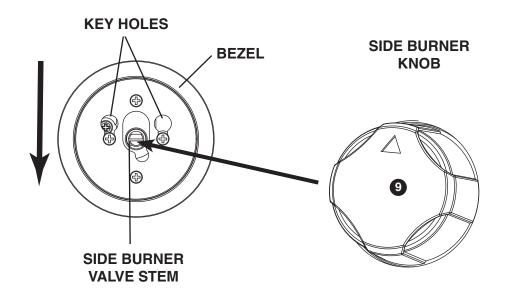


 Attach wire clip to side burner.

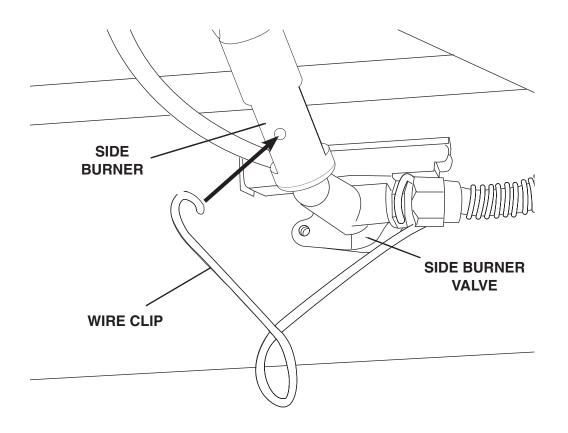


Step 28


• Attach ignitor wire to electrode.

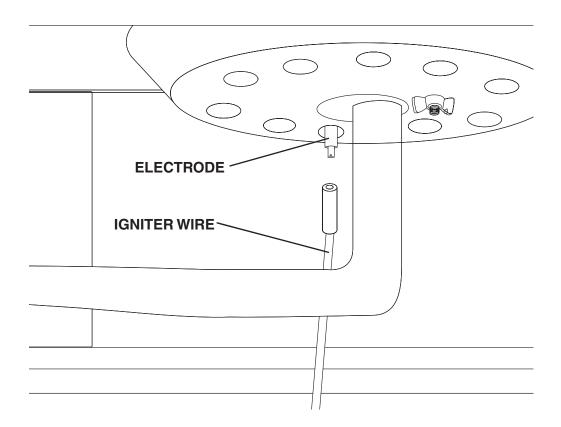


Install side burner grate 4.

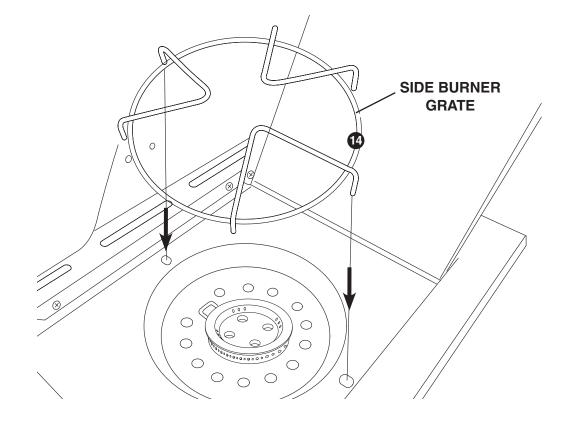


- Remove two screws from grease tray handle.
- Attach grease tray hadle to outside using two screws.
- Tighten screws.

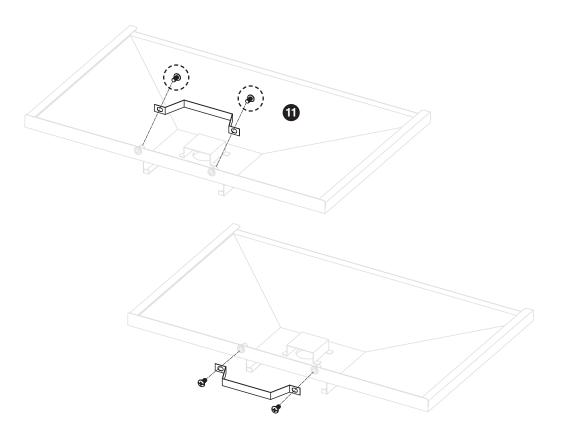

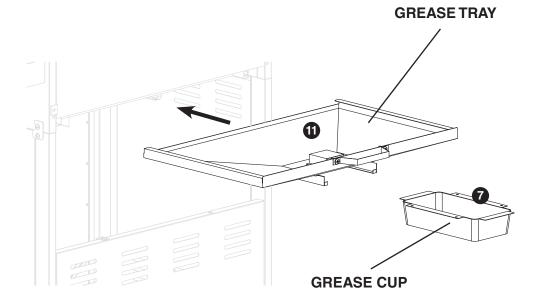

Install grease tray
and grease
cup through
back of grill.

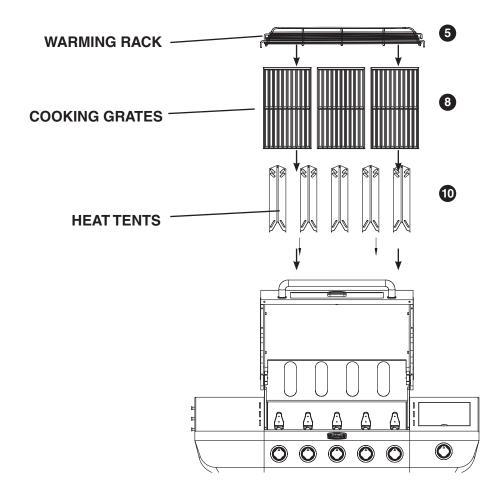

Step 32

• Install heat tents

①, cooking grates

③ and warming
rack

5.

Model GAS2556AS Assembled

