


ASSEMBLY INSTRUCTIONS

Model SMK1021ASO

NOTICE TO INSTALLER: LEAVE THESE INSTRUCTIONS WITH THE GRILL OWNER FOR FUTURE REFERENCE.

A WARNING

READ ALL INSTRUCTIONS BEFORE INSTALLATING AND USING APPLIANCE. FAILURE TO FOLLOW THESE INSTRUCTIONS COULD RESULT IN PROPERTY DAMAGE, BODILY INJURY OR EVEN DEATH. CONTACT LOCAL BUILDING OR FIRE OFFICIALS ABOUT RESTRICTIONS AND INSTALLATION INSPECTION REQUIREMENTS IN YOUR AREA. SAVE THESE INSTRUCTIONS.

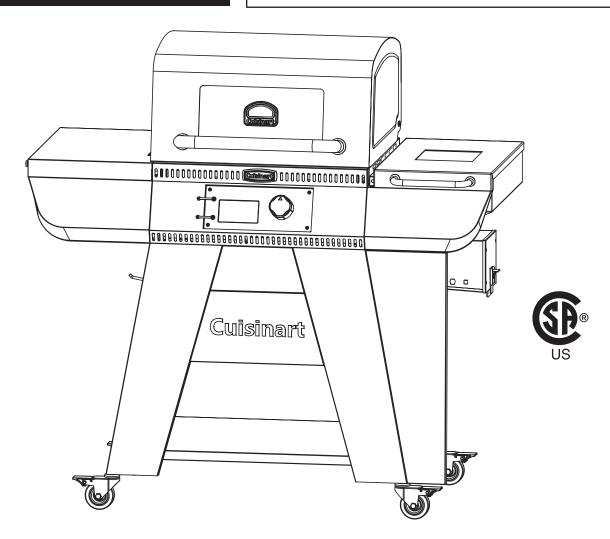

ASSEMBLY INSTRUCTIONS:

A READ ALL SAFETY WARNINGS & ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING OR OPERATING YOUR GRILL.

WE RECOMMEND TWO PEOPLE WORK TOGETHER WHEN ASSEMBLING THIS UNIT.

The following tools are required to assemble this Cuisinart 21" Pellet Grill:

- Phillips Screwdriver
- Pliers or Wrench

PARTS LIST:


(1)	1	Front	Panel

- (2) 1 Right Front Leg
- 3 1 Left Front Leg
- 4 1 Right Side Panel
- (5) 1 Left Side Panel
- (6) 1 Cart Brace
- 7 1 Cart Base
- 8 1 Left Rear Leg
- (9) 1 Back Panel
- (10) 1 Right Rear Leg
- (11) 1 Grill Body
- (12) 1 Hood Handle
- 13 1 Temperature Gauge
- 1 Temperature Gauge Bezel
- 15 1 Control Knob
- 1 Pellet Hopper Lid Handle
- 1 Pellet Hopper
- (18) 1 Left Side Table


- (19) 1 Right Side Control Panel
- 20 1 Left Side Control Panel
- (21) 1 Grease Cup Bracket
- (22) 1 Grease Cup
- (23) 1 Warming Rack
- (24) 1 Ash Catcher
- (25) 1 Grease Channel
- 26 2 Cooking Grates
- (27) 1 Cord Wrap
- (28) 1 Heat Baffle
- 29 1 Heat Plate
- 30 1 Auger Housing
- 31) 2 Accessory Hooks
- 32 4 Casters

Note: Most hardware is pre-attached to the grill. You may need to loosen some screws partially while others may need to be removed in order to assemble parts. The screws that you remove will be re-used so don't misplace this hardware.

Extra screws are included in a small bag with the owners manual.

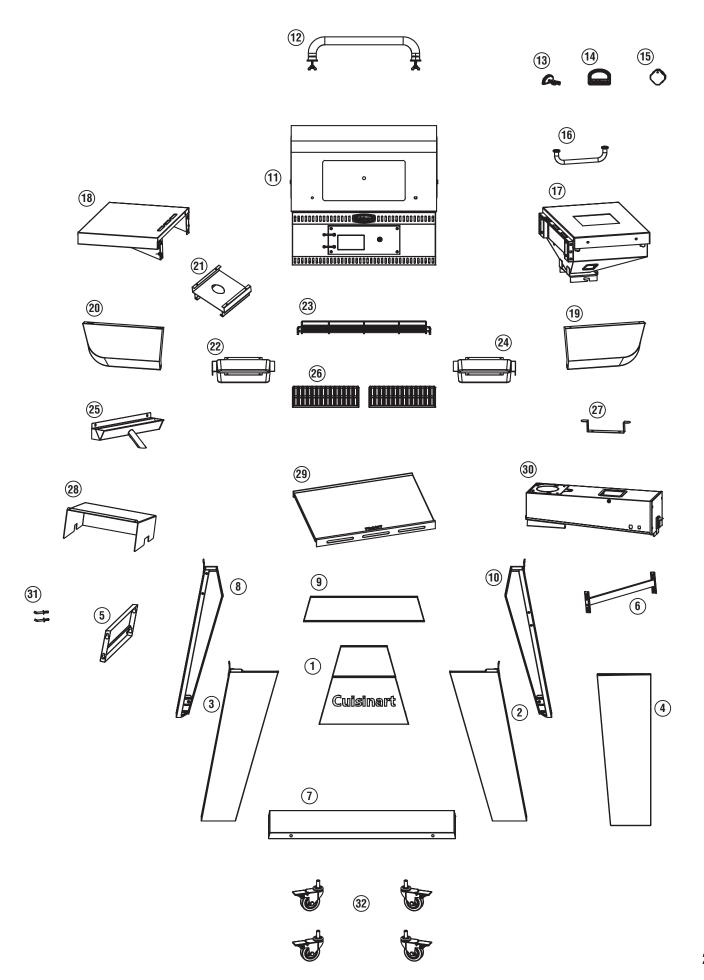



- Loosen 6 screws 3-4 turns on FRONT LEGS
 and
- Do not remove screws
- Attach FRONT PANEL
 using keyholes
- Tighten 6 screws

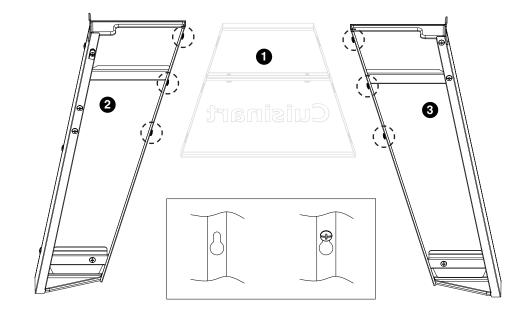


NOTE: Before tightening keyhole screws, make sure panels are aligned.

- Loosen 3 screws
- Attach RIGHT SIDE PANEL 4
- Tighten 3 screws on RIGHT SIDE PANEL 4

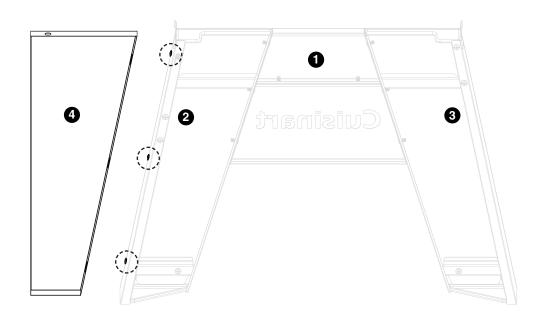

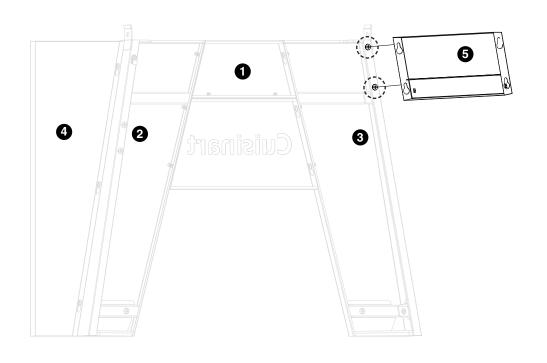


- Loosen 2 screws
- Attach LEFT SIDE PANEL 5
- Tighten 2 screws on LEFT SIDE PANEL 6

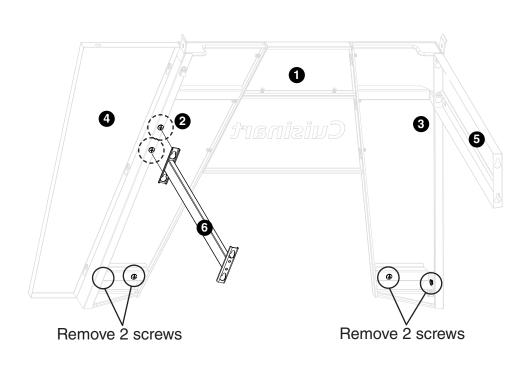


- Loosen 2 screws
- Attach CART BRACE 6
- Tighten 2 screws on CART BRACE 6
- Remove 4 screws

- Attach CART BASE 7
- Tighten 4 screws (Removed from Step 4)

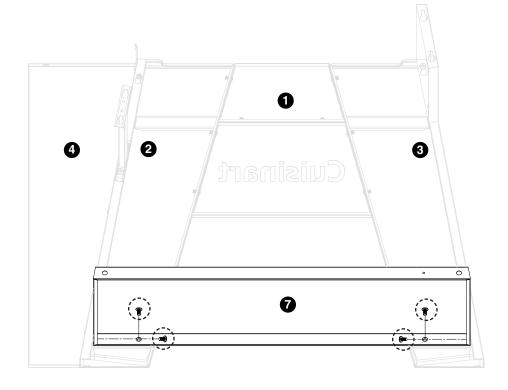


- Loosen 8 screws on REAR LEGS 8 and 10
- Attach BACK PANEL 9 to REAR LEGS 3 and
- Tighten 4 screws
- Remove 4 screws

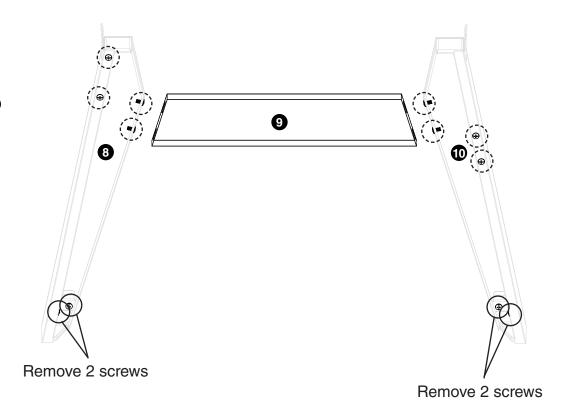




 Tighten 4 screws (Removed from Step 6)

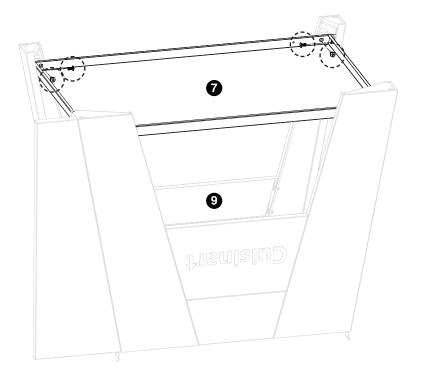



- Attach LEFT SIDE
 PANEL 5 and CART
 BRACE 6
- Tighten 4 screws

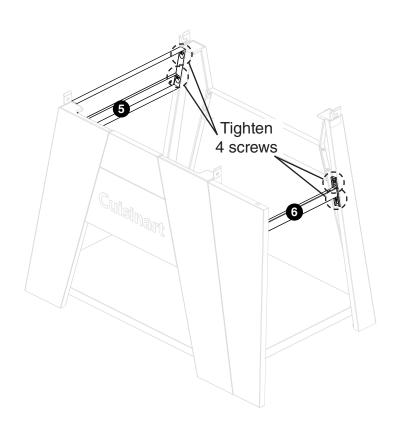

- Lock CASTERS 32
- Attach CASTERS to legs


32 CASTERS



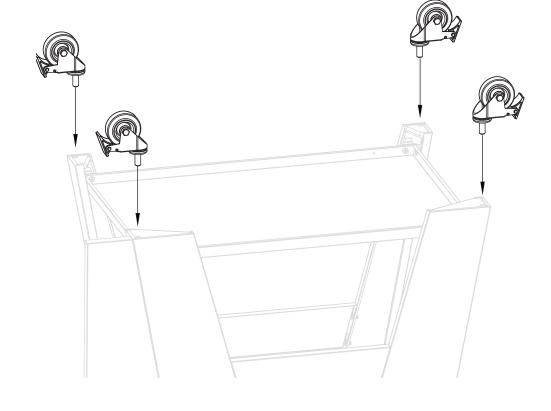


Step 10

• Attach ACCESSORY
HOOKS 1 to LEFT
SIDE PANEL 5 with
wing nuts and washers

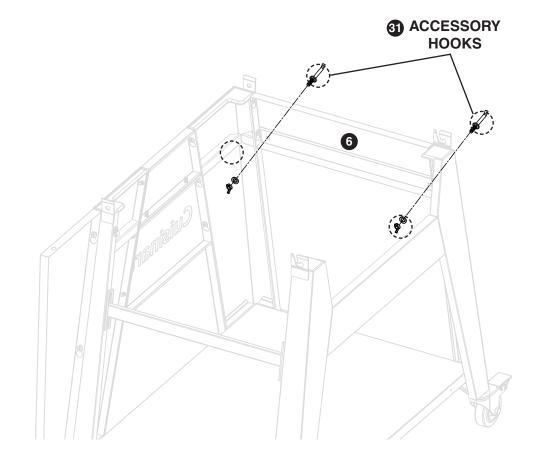

- Loosen 1 screw
- Remove 4 screws
- Remove protective plate from right side of grill body assembly

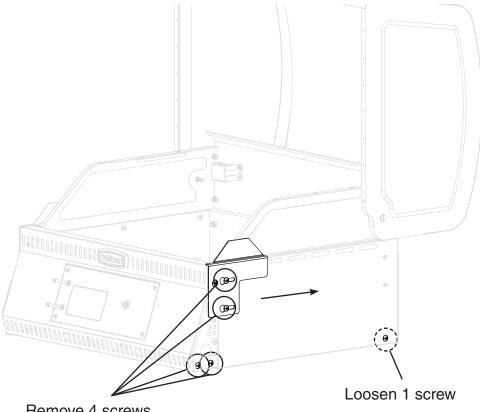


Remove 4 screws

Loosen 5 screws


Remove 3 screws

- Loosen 5 screws
- Remove 3 screws
- Remove two protective plates from left side of grill body assembly


- Set GRILL BODY on cart
- Make sure screw drops into rear cart brackets
- Push GRILL BODY 10 to back of cart
- Install 2 screws in FRONT BRACKETS (Removed from Step 11 and Step 12)
- Tighten 4 screws on cart brackets (2 screws left over will be used in future steps)

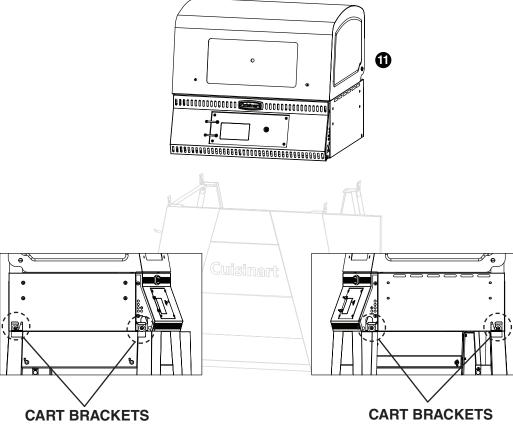

- Remove 4 screws from GREASE CUP BRACKET 4
- Install GREASE CUP BRACKET 1 to the bottom of the GRILL BODY 1 using 4 screws

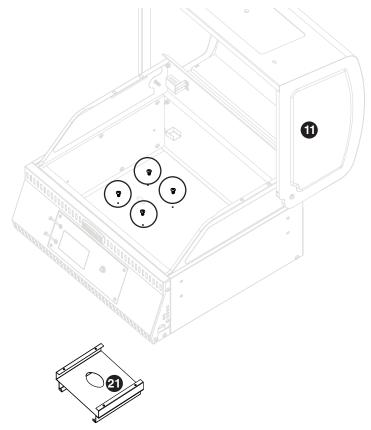


- Remove 2 screws
- Attach GREASE CHANNEL 25
- Tighten 2 screws

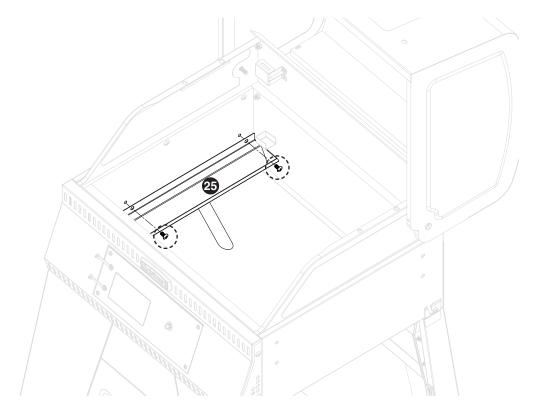


Remove screws and washer

- Loosen 2 screws
- Attach LEFT SIDE
 CONTROL PANEL to
 LEFT SIDE TABLE voer keyholes
- Tighten 2 screws
- Remove 1 screw and washer


- Attach LEFT SIDE
 TABLE [®] to GRILL
 BODY [®] using keyholes
- Do not tighten screws at this time
- Install and tighten screw (Removed from Step 12)

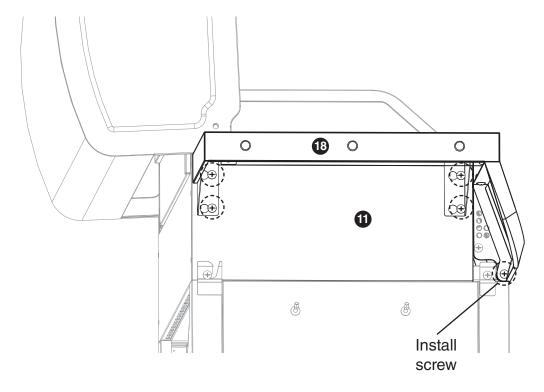


- Install screw and washer (Removed from Step 16)
- Make sure control panels are aligned
- Tighten 5 screws from Step 17 and Step 18

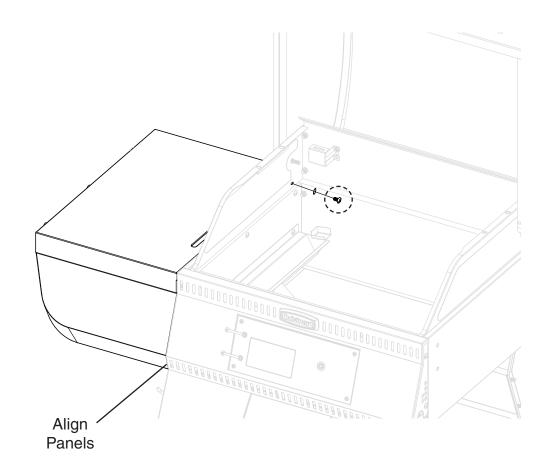





- Loosen 2 screws
- Attach RIGHT SIDE
 CONTROL PANEL
 to PELLET HOPPER
 over keyholes
- Tighten 2 screws

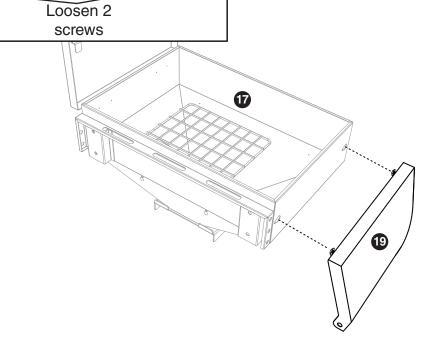


Remove screw


- Attach PELLET HOPPER

 To GRILL BODY

 To GRILL BODY
- Tighten 4 screws
 (Find M6x35 screws bag
 with owners manual)

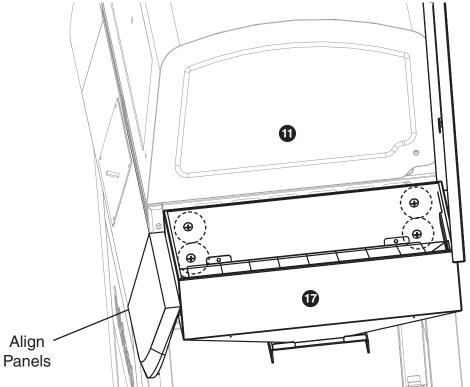


 Install 2 screws (1 screw removed in Step 11 and 1 screw removed in Step 19)

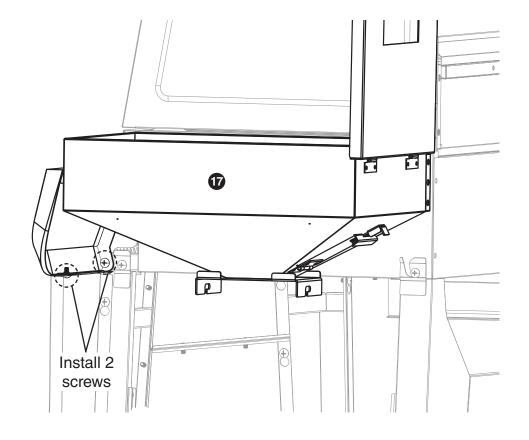


Step 22

 Install PELLET HOPPER LID HANDLE (screws, washers and bezels are pre-installed in handle)

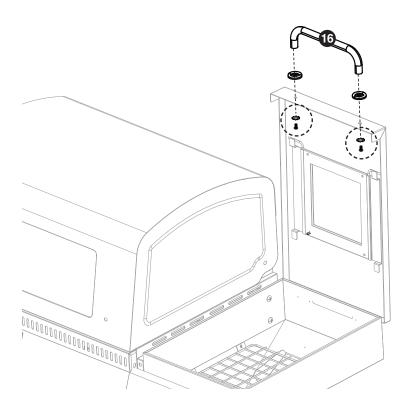


Install TEMPERATURE
 GAUGE ¹³ and BEZEL
 using washer and wing nut

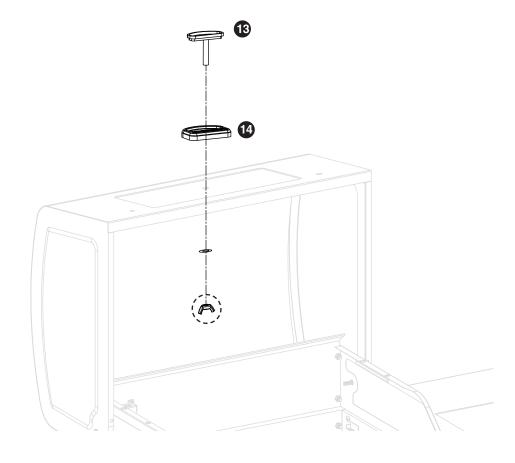


Step 24


Install HOOD HANDLE
 (Wing nuts, bezels and washers are pre-installed on handle)

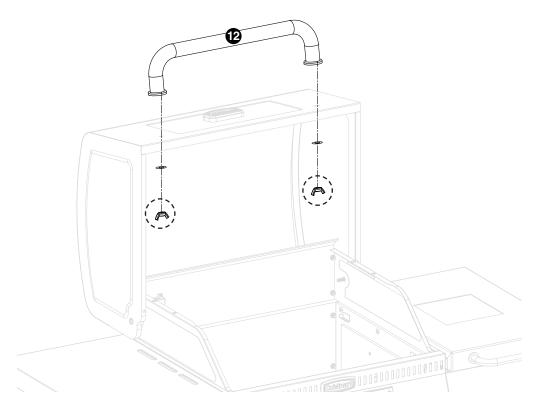



- Remove 4 screws and washers
- Loosen 1 screw

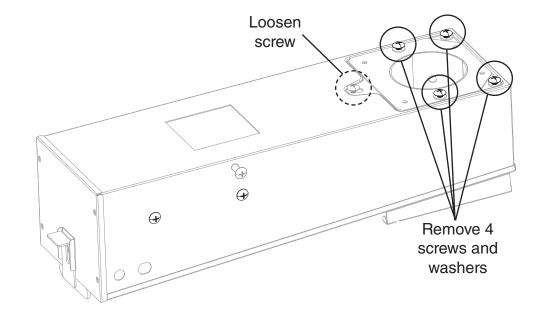


- Install AUGER HOUSING
 using keyhole in firebox and slots in pellet hopper bracket
- Tighten 5 screws and washers in firebox










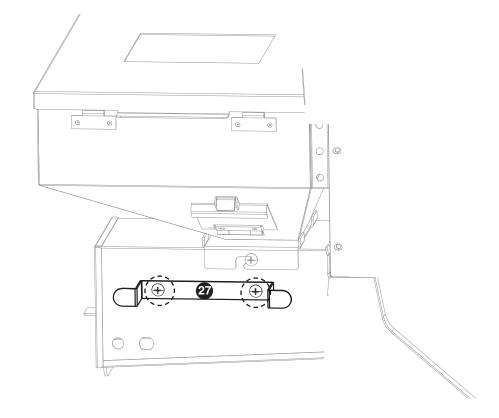


Step 28

Attach CONTROL KNOB
 to controller

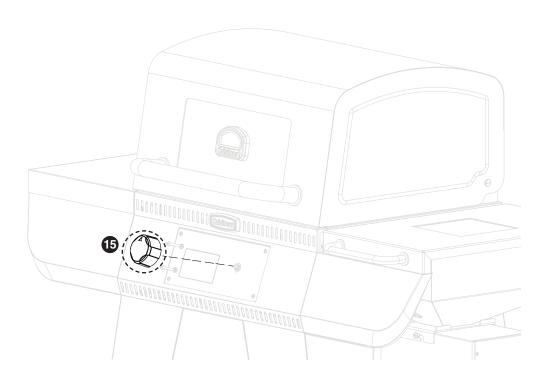


Step 29a

- Connect wiring for Controller
- These wires can only be connected one way
- Make sure the connectors are lined up properly before tightening

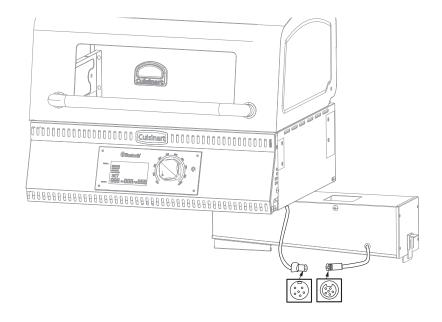


Step 29b

 Once connected, twist to tighten

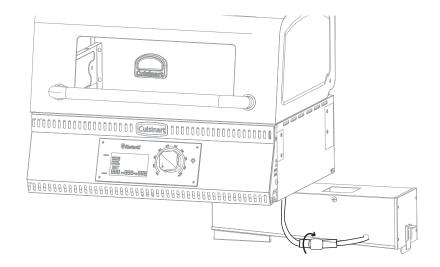


Step 29c

Secure wiring with cord clip.

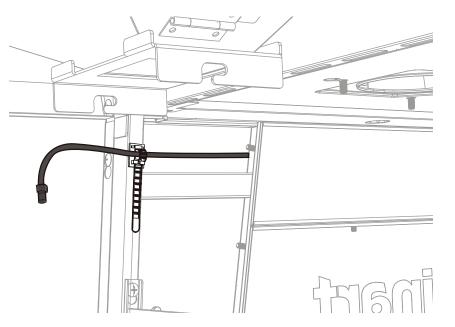


Attach **HEAT BAFFLE** 3

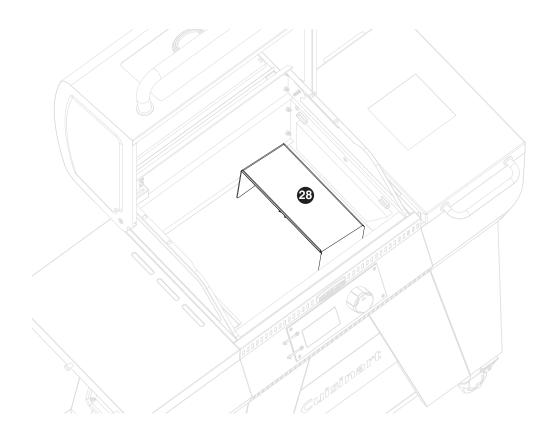


Step 31

• Install **HEAT PLATE** ② on welded brackets

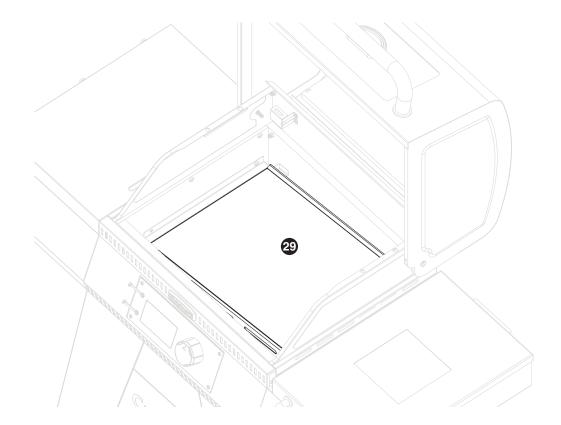


• Install COOKING
GRATES ② and
WARMING RACK ③

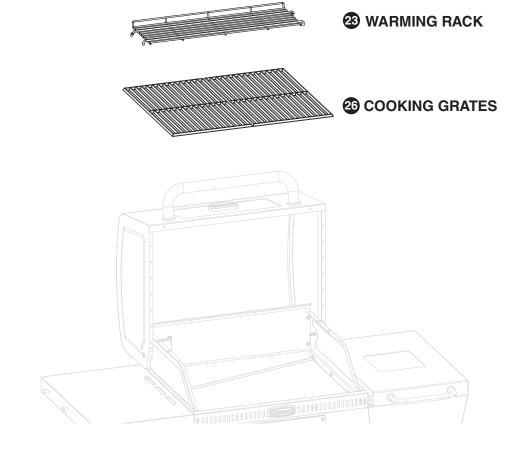

Step 33

• Install ASH CATCHER 29 and GREASE CUP 29

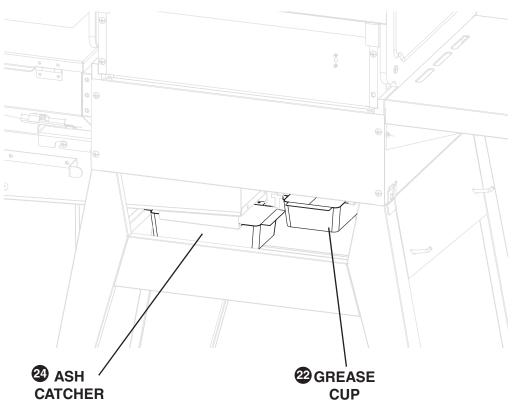

Model SMK1021ASO

