## BUD-40/3 PV DC Surge Protection Device






- 1 Brand
- 2 Type
- 3 Max. Discharge Current Imax
- 4 Nominal Discharge Current In
- 5 Voltage Protection Level Up
- 6 Max. Continuous Operating Voltage Ucpv
- 7 Indicator
- 8 Standard Code
- 9 Certificate Symbol

- Suitable For Use in All Photovoltaic Systems
- Prewired Modular Complete Unit,
   Consisting of A Base Part and Plug-in
   Protection Modules
- Plug-in Protection Module, Easily Installation and Maintainance
- High Energy Varistor, Response Time Less Than 25 Nanosecond
- Optional Remote Signalling Contact(FM) for Monitoring Device (Floating Changeover Contact)
- Din Rail Mounting TH35-7.5/DIN35
- Comply with :IEC/EN 61643-31/UL 1449


## **Application**

**ZBENY** PV DC BUD-40/3 Surge Protection Device was designed and manufactured, complying the PV standard IEC/EN 61643-31/UL1449, It widely used in PV DC combiner box, inverter, controller and PV DC cabinet. Rated voltage 1000V DC, Maximum discharge current 40KA,High Energy Varistor, high effective for lightning protection.

### **Appearance Introduction**



## **Type Instruction**

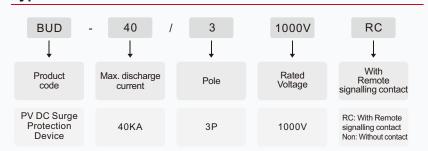


#### **Parameter**


PV DC BUD-40/3 S	argo i rotectioni	501100	0.0
Pole			3P
Standard			IEC/EN 61643-31/UL 1449
Electrical Character	ristics		
Category IEC/EN			IEC II/EN2
Open Voltage		Uoc Max	1000V DC
Max Continuous Operational Voltage		Uc	1000V DC
Nominal Discharge Current		In(8/20)µs	20KA
Maximum Discharge Current		Imax(8/20)µs	40KA
Voltage Protection Level Up		Up	≤3.8KV
Response Time			≤25ns
Control and Indicati	on		
Operating State/fault Indication			Green/Red
Plug-in Protection Module			•
Remote Signalling Contact(Optional)	Max. Working Voltage(V)		30V DC
	Max. Working Current		1A
Connection and Ins	tallation		
Wire	Hard cable mm <sup>2</sup>		4~25
	Flexible cable mm <sup>2</sup>		4~16
Terminal Screws			M5
Torque(Nm)	Main Circuit		2.5
	Remote Contact		0.25
Degree of Protection			IP20
Installation Environi			
Operating Temperature Range (TU)			-40°C~+80°C
For Mounting on			TH35-7.5/DIN35
Relative Humidity			30%~90%
Weight kg			0.36

# **BUD-40/3**PV DC Surge Protection Device

# **Principal Drawing**

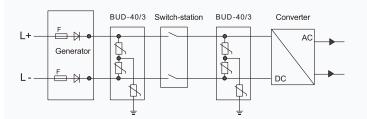

## Wiring Method



# Dimensions(mm)



