

# Clevis & Clevis Turnbuckles


## Product Description

- AS2319 - 2001
- 6:1 Safety Factor
- Grades L, P & S
- Testing and Certification
- Galvanized
- Manufactured using only heat certified Australian Steel (AS1442/AS1444)



### Available on Request


- Locknuts

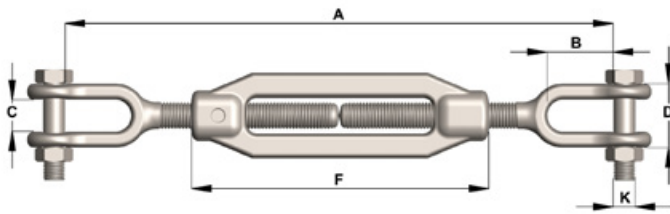

Townley Drop Forge is both NATA Accredited (Test Lab No. 13554) and AS/NZS ISO9001 Certified (Certificate number FS 604897)..

### Dimensions and Working Load Limits (WLL) Metric - Grades L , P & S

| Nominal Size | A Closed | A Open | B  | C  | D  | F     | K  | Grade L WLL | Grade P WLL | Grade S WLL |
|--------------|----------|--------|----|----|----|-------|----|-------------|-------------|-------------|
| M10          | 240      | 350    | 30 | 14 | 30 | 150.0 | 10 | 0.3t        | 0.6t        | 0.8t        |
| M12          | 335      | 470    | 36 | 15 | 35 | 190.5 | 10 | 0.5t        | 1t          | 1.2t        |
| M16          | 355      | 490    | 45 | 20 | 40 | 204.0 | 12 | 0.75t       | 1.6t        | 2t          |
| M20          | 440      | 580    | 46 | 22 | 46 | 216.5 | 16 | 1.25t       | 2.5t        | 3.2t        |
| M24          | 440      | 585    | 59 | 30 | 58 | 232.0 | 20 | 2.5t        | 4t          | 5t          |
| M33          | 630      | 780    | 78 | 38 | 76 | 252.0 | 27 | 5t          | 8t          | 10t         |

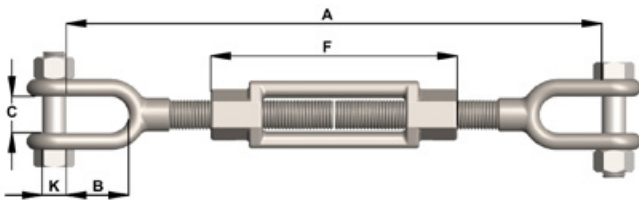

### Dimensions and Working Load Limits (WLL) BSW - Grade L

| Nominal Size | A Closed | A Open | B  | C  | F   | K  | Grade L WLL |
|--------------|----------|--------|----|----|-----|----|-------------|
| 1 1/4"       | 520      | 670    | 70 | 38 | 255 | 25 | 5t          |
| 1 1/2"       | 550      | 740    | 70 | 48 | 275 | 32 | 6t          |

Subject to technical modifications