

**Excellence in automation**  
for a wide range of  
**market segments and applications**



**NOVUS**  
We Measure, We Control, We Record

# Products and solutions for automation present in over 60 countries



## About NOVUS

For the last 40 years, **NOVUS** has developed and manufactured innovative and reliable products for data acquisition, temperature control, process control, signal conditioning and transmission of field variables. All devices comply with worldwide quality requirements, thus providing solutions that exceed customers' expectations.

**NOVUS** is present in over 60 countries through a network of more than 300 distributors in addition to its own sales offices in South America, North America and Europe.

In 2018 **NOVUS** moved its headquarters to Canoas, southern Brazil. The new plant was designed for **NOVUS** specific needs, has three thousand square meters dedicated to the factory and, overall, surpasses five thousand square meters of built area. Its bespoke structure ensures the possibility to expand production capability four times.

All **NOVUS** products are produced in real-time reconfigurable and autonomous manufacturing cells, following Industry 4.0 concepts.

Moving a highly skilled staff to larger and modern facilities opened the path to productivity improvements aligned with **NOVUS** strategic planning. With an advanced production infrastructure and fully equipped research laboratories, the company is now able to achieve higher throughput in a larger portfolio of valued added products, therefore increasing national and international market shares.

Currently, half of what is produced by **NOVUS** is destined for the international market. Export demand keeps growing due to a worldwide recognition of the quality and value of **NOVUS** products.

## Certifications and Approvals





# Summary Business Units



## Data Acquisition and Communication

Data acquisition systems, I/O modules, wireless connectivity and gateways.

4



## Sensing, Conditioning and Transmitters

Signal conditioners, temperature, relative humidity and pressure transmitters.

9



## Process Control and Indication

Process controllers, temperature controllers, process indicators, electronic thermostats and HMIs.

18



## Software Interface

Computer software and smartphone applications (for device configuration, data download and data acquisition), SCADA software, and cloud based platforms.

5, 11 e 21



## Metrology Services

Metrology services for temperature, relative humidity, pressure and electrical parameters.

27



# Data Acquisition

## Wireless Multichannel Data Loggers - LogBox Connect

**LogBox Connect** provides data acquisition and connectivity for any type of application. With all its wireless options, it is the gateway to the connected IoT world.

### Bluetooth Data Logger

- Suitable for **battery operated** applications
- Configuration and downloading data via USB (NXperience) or **Bluetooth (NXperience Mobile)**
- Memory capacity up to **140,000 logs**
- Powered by 4 AA alkaline batteries or external DC power supply
- Input channels - 3 analogs and 1 digital

#### APPLICATIONS



Laboratory



Cold Chain



Data Centers



LogBox BLE

### Wi-Fi Data Logger

- Suitable for distributed environments with existing **Wi-Fi infrastructure**
- Configuration and downloading data via USB or Wi-Fi - Modbus TCP (**NXperience**)
- **E-mail alarm** notification
- **MQTT** communication protocol - Cloud based platforms, **NOVUS Cloud** and **IoT Brokers**
- Input channels - 3 analogs and 1 digital

#### APPLICATIONS



Distribution Centers



Cold Chain



Commercial Refrigeration



LogBox Wi-Fi

### Data Logger LTE

- Suitable for mobile applications in **long distance locations**
- Configuration and data download via USB or **NOVUS Cloud**
- **SMS alarm** notification
- Built-in rechargeable **backup battery**
- Easy integration with **NOVUS Cloud**
- Data communication via LTE network through **NXperience** and **SCADA softwares**

#### APPLICATIONS



Utility Services



Transportation of Temperature Sensitive Products



Agricultural Greenhouses



LogBox LTE

# Software Interface

## Configuration and Download Software

**NXperience** makes it possible to adjust the device parameters and functionalities, allowing secure data downloading.

Download and complete analysis, graphical viewing, mathematical formulas, and reporting.

With extensive connectivity, powerful data analysis and visualization capabilities, users can access **different NOVUS devices** via USB, Modbus RS485, Ethernet/Wi-Fi (Modbus TCP/IP) and cloud data from **NOVUS Cloud**.



**NXperience**



**Flexibility of Configuration**



**Device Diagnostics**



**Analytical Reports**

## Validation software for Configuration and Download

**NXperience Trust** has GMP (Good Manufacturing Practice) compliance, meeting with the technical requirements of **FDA 21 CFR Part 11** for validation of computer systems. The user has an electronic record of encrypted data, a strong authentication mechanism with password validity, and an application event log for traceability and audit trail. Protocols and execution of validation are optional and offered separately, to complement the solution.



**NXperience Trust**



**Inviolable Information**



**Data Security**



**Complies with 21 CFR Part 11**

## Configuration and Download Mobile App

**NXperience Mobile** is a smartphone application (Android and iOS) for configuring and downloading data wirelessly from **LogBox BLE** and **LogBox Wi-Fi** devices. Besides, it is possible to run device diagnostics and export registered data.



**NXperience Mobile**



**Setting Parameters**



**Data Export**



**Alarm Notification**



# Data Acquisition

## Micro Data Logger for Temperature and Humidity

**LogBox-RHT-LCD** is a data logger with integrated sensors for temperature and humidity. It uses high-quality sensor, for accurate and reliable transportation applications, storage of perishables, audit processes, among others.

You can quickly check the minimum and maximum values that occurred during acquisitions on **LogBox-RHT-LCD** display. This logger has a **32,000 registers** memory, 16,000 for each channel. The estimated **life battery** life is up to **200 days** with one weekly download and 5 minutes measuring interval.

**NXperience** software enables configuring, collecting, plotting, analysis, and export records.



**LogBox-RHT-LCD**

## Rugged Data Loggers



	LogBox AA	LogBox DA	LogBox RHT
<b>Input Signals</b>	2 analog Inputs	1 digital Input 1 analog Input	Temperature and relative humidity sensors
<b>Analog Signal Type</b>	Thermocouples J, K, T, N, R, S, and B, Pt100, 0-50 mV, 0-10 V, 0-20 mA, 4-20 mA	(0-50 mV, 0-10 V, 0-20 mA, 4-20 mA)	-
<b>Digital Outputs</b>	1 electronic switch		-
<b>Resolution</b>	14 bits		Temperature 14 bits humidity 12 bits
<b>Memory Capacity</b>	64000 records		64000 records (32000 temperature and 32000 humidity)
<b>Logging Interval</b>	1 sec to 18 h		
<b>Logging Mode</b>	Instantaneous, average, minimum or maximum		
<b>Logging Trigger</b>	Date/time, start button or digital input	Date/time	Date/time, start button or setpoint
<b>Alarms</b>	2 alarms (one per channel) minimum and maximum values		
<b>Communication Interface</b>	Infrared through IR Link-3		
<b>Configuration Software</b>	NXperience (Window based)		
<b>Power Supply</b>	3.6 V replaceable lithium battery (½ AA)		
<b>Battery Life</b>	Typically 1 year		
<b>Housing Protection</b>	IP65		IP40



## Industrial Multichannel Data Logger - FieldLogger

**FieldLogger** is a high-performance instrument for reading and recording variables. It has high inputs/outputs density and several options for displaying, logging and processing information. It can also be used as an analog + digital I/O expansion for PLCs in monitoring and control applications.

### I/Os

- 8 Universal analog inputs
  - Thermocouples (J, K, T, N, E, R, S, and B), 0-5V, 0-10V, mV, mA, Pt100, and Pt1000
  - 128 virtual channels (refer to Mathematical Functions)
  - Sampling rate up of to 1000 readings/second (24-bit A-D conversion)
- 2 Relay outputs
- 8 Digital I/Os individually configurable as input or output

### RECORDING


- Internal memory of up to 512,000 recordings
- Memory extension with SD or SDHC card
- Records up to 100 channels (local, remote or virtual variables)
- Recording rate of 1000 logs/second (max)
- Data download through configuration software (USB device, RS485, Ethernet or USB drive)

### HMI

- 2.4" color QVGA screen and 96 x 48 mm format
- Screen menu with current channel value, history chart, and status information
- Allows to view and configure parameters
- Local or remote installation with RS485 communication



Optional HMI with color QVGA display

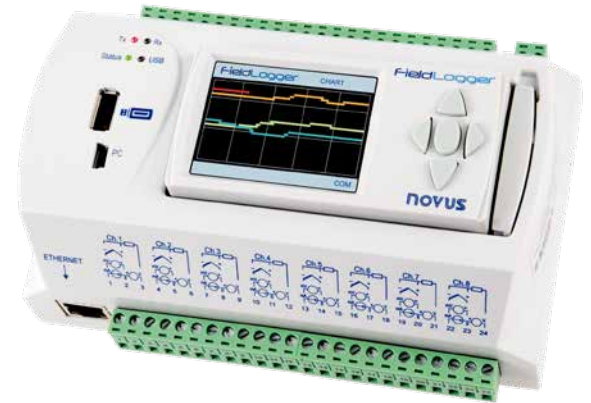

FieldLogger

### COMMUNICATION INTERFACES

- RS485 "Master" for reading from up to 64 remote channels (Modbus protocol)
- RS485 "Slave" for communicating with SCADA software or Host
- USB "Device" port for instrument configuration and data download
- USB "Host" port for downloading recorded data into USB drive)
- Ethernet (10/100 Mbps) – Optional
  - Protocols DHCP, HTTP, FTP, SNMP, SMTP Client, and
- Modbus TCP
  - Custom webpage server in XML format
  - Operates as a gateway between a Modbus TCP network and a Modbus RTU network

### MATHEMATICAL FUNCTIONS

- Supports up to 128 virtual channels
- Each virtual channel is a mathematical or logical operation performed over any input channel
- The result of one virtual channel can be used as input to another, which allows one to create complex formulas

### ALARMS

- Up to 32 configurable alarms (with local, remote or virtual channels)
- The occurrence of an alarm allows:
  - Relay activation
  - Digital outputs activation
  - Sending emails to multiple recipients
  - Sending SNMP traps
  - Start and stop logging



# I/O Modules

## Ethernet I/O Module

- Mixed I/Os (analog and digital)
- Ethernet with Modbus TCP/IP protocol
- RS485 with Modbus RTU protocol
- Configurable via USB
- Advanced I/O functions

**DigiRail Connect** is a versatile DIN rail I/O module with Ethernet interface which can be easily integrated to any automation system. With a flexible mix of industry-standard inputs and outputs, it performs field analog and digital signal handling with outstanding accuracy. Specially designed to comply with international electromagnetic compatibility standards, it ensures robustness and reliability in the most demanding industrial applications.



### APPLICATIONS



Industry



Energy



Steel Industry




Distribution Center

## Programmable I/O Module

- Mixed I/Os (analog and digital)
- Rugged and reliable for industrial applications
- RS485 interface
- High-Level Programming with Arduino IDE

**DigiRail NXprog** is a programmable I/O module compatible with Arduino integrated development environment (IDE). With a mix of both analog and digital I/Os, **DigiRail NXprog** can be used as a controller in custom applications for machine or process automation. Flexible user programmability allows access to the local I/Os and the communication interface. The device can run complex algorithms and can connect with other devices via Modbus RTU protocol. **DigiRail NXprog** can run Arduino library codes or custom ones, providing great versatility in a wide range of applications.

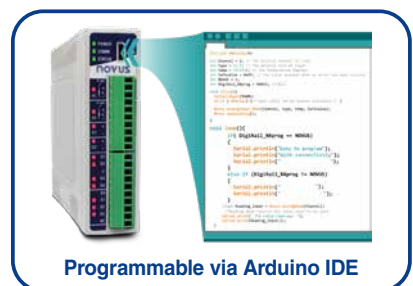

Programmable via Arduino IDE

### APPLICATIONS



General Automation



Food and Beverage



Plastics and Packaging



Water and Wastewater



# Communication

## I/O Module for OEE/MES

**DigiRail OEE** is an I/O module designed for OEE (Overall Equipment Effectiveness) and MES (Manufacturing Execution System) industrial systems. It is the ideal tool to read the sensors that monitor the operation of machines, devices, or processes. Among its many applications, it allows to count operation time and downtime, the amount of approved and rejected parts, signal the need for preventive or corrective maintenance.

Provided with Modbus TCP and secure MQTT protocol, **DigiRail OEE** transmits data natively to Google Cloud, Microsoft Azure, Amazon AWS, **NOVUS Cloud**, or any other compatible IoT cloud platform.

<b>Communication Interfaces</b>	Ethernet or Wi-Fi, RS485 and USB
<b>Inputs and Outputs</b>	6 Digital Inputs, 2 Analog Inputs and 2 Digital Outputs
<b>Digital Signals</b>	NPN, PNP, and dry contact
<b>Analog Signals</b>	0-5 V, 0-10 V, 0-20 mA and 4-20 mA
<b>Buffer Capacity</b>	1800 logs with all inputs enabled 7000 logs with 1 input enabled
<b>Clock Sync</b>	Synchronize the clock through an NTP (Network Time Protocol) server
<b>Maximum Pulse Count Frequency (square wave)</b>	Dry contact: 10 Hz; PNP: 3 kHz; NPN: 3 kHz



**DigiRail**  
OEE



## Modbus IO Modules

**DigiRail** signal conditioning modules can easily integrate different analog or digital signals into PLCs or supervisory systems in a cost-effective way being the right choice for input and output expansion with great flexibility.

- Communication and status LED indicators
- Universal and configurable inputs and outputs
- Configuration and calibration can be performed with the free **DigiConfig** software



### DigiRail 2A, 2R e 4C

#### DigiRail 2A

##### Two universal analog inputs

- Analog inputs: type J, K, T, E, N, R, S and B T/Cs, Pt100, mV, V, mA
- Resolution: 17 bits
- Isolation: 1000 Vac between inputs and power or communication port

#### DigiRail 4C

##### Four digital I/Os

- Fast inputs allow up to 1000 Hz digital signals
- Resolution: 32-bit counting
- Isolation: 1000 Vdc between input

#### DigiRail 2R

##### Two relay outputs

- 8 A / 250 Vac SPDT relay, resistive load
- Configurable activation time
- Isolation: 2000 Vac between power and communication

## Electrical Parameters Transmitter

**DigiRail-VA** is a cost effective electrical parameters signal conditioner and transmitter specifically designed for single phase AC power analysis and measurement applications.

- Measures voltage, current, active power, apparent power, reactive power, frequency, and power factor
- Retransmits the measured variables in both analog and digital (RS485 Modbus) ways
- Features a USB interface for configuration and reading
- Easy-to-use DigiConfig configuration software (free of charge)



**DigiRail VA**

# Communication


## Wireless Modbus Gateway

**AirGate Modbus** is a multifunctional device that can be used as a wireless repeater, Modbus master multiplexer, Modbus network wireless segment or as an RS485 USB converter.

- Wireless branches for any wired RS485 network node
- Four operation modes
- Automatic configuration of a wireless tree topology network
- Connects devices up to 1000 meters apart
- Easy-to-use configuration software



**AirGate Modbus**

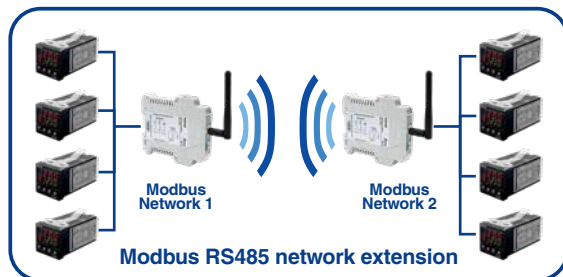

## USB to RS485 Converter

Fast and reliable solution for interfacing between PCs and RS485 or RS422 industrial communication buses.

- **Plug and Play USB** Interface
- Compatible with any serial communication application
- **Compact** and easy to use in the field
- 1500 Vdc **galvanic isolation** between the USB port and RS485/RS422



**USB i485**

## Profibus to Modbus Gateway

**DigiGate Profibus** is a cost-effective gateway for communication between Profibus and Modbus RTU networks. The gateway takes care of all protocols specificities to forward Profibus DP commands to devices connected in a Modbus network.

- LED indicators for communication status
- Reliable interconnection between a Profibus and a Modbus network
- Profibus network acts as the master to Modbus devices
- Easy configuration via **DigiConfig** for Windows®



**DigiGate Profibus**



# Software Interface

## SCADA – Supervisory Software

**SuperView** is an industrial process control and supervision software (SCADA) that presents a visual development model to the user for building applications. Besides the communication with Modbus RTU and Modbus TCP devices, it is also possible to use **SuperView** workstations as Client and Server to manage geographically distributed processes on TCP/IP networks.




SuperView



SuperView Mobile

## Dashboard and IoT Cloud Platform

**NOVUS Cloud** is a platform focused on Internet of Things solution that expands the horizons of data viewing. Combined with **NOVUS** devices, this platform receives, stores, analyzes and displays on dashboards measurements of temperature, humidity, pressure, geolocation or any other variable of interest. Data access via the Internet is particularly necessary for several market segments, such as logistics, health, building, energy, sanitation, and agribusiness areas.




## Data Acquisition Software

**FieldChart** is a data acquisition software, which allows the monitoring and recording of data from **NOVUS** devices in an easy, fast and intuitive way.

Suitable for use in any process, **FieldChart** also allows the configuration of alarms, as well as their acknowledgment, and the automatic saving of real-time data in a file.

The software is offered in two versions: **FieldChart-Lite** (limited to 8 monitoring channels) and **FieldChart-64C** (allows up to 64 monitoring channels). **FieldChart** makes the recorded data available in graph format or as a variable list.

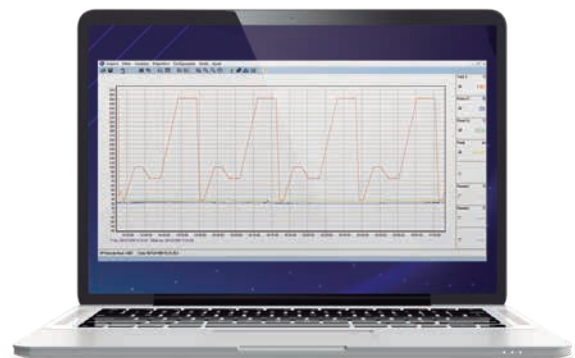

FieldChart

# Relative Humidity and Temperature Transmitters

## Wireless Relative Humidity and Temperature Transmitter

**RHT Air** is a wireless relative humidity and temperature transmitter which operates over long distances and allows configuration and parameters reading over a wireless network within 500 m distance. It has a long operating battery life combined with the convenience of a wireless sensor that avoids electrical noise susceptibility ensuring a robust and secure solution. Operation without cables or wires simplifies installation and relocation of devices. **RHT Air** operates on its own wireless network and works independently from the company's IT infrastructure.

- Relative humidity and temperature measurement over long distances
- Independent industrial wireless network
- Long operating battery life
- Easy network scalability
- Noise immunity



**RHT Air**

### Wall mounting



	RHT WM	RHT WM 485 LCD	RHT XS	RHT P10	RHT Air
<b>Input Type</b>	Integrated RHT probe		Extended RHT probe (3 m cable)	Extended RHT probe (flange mounting) (3 m cable)	Integrated RHT probe
<b>Measurement Range</b>	Temperature: -10 to 60 °C (14 to 140 °F) Humidity: 0 to 100% RH	Temperature: -40 to 100 °C (-40 to 212 °F) Humidity: 0 to 100% RH	Temperature: -40 to 120 °C (-40 to 248 °F) Humidity: 0 to 100% RH		Temperature: -40 to 100 °C (-40 to 212 °F) Humidity: 0 to 100% RH
<b>Accuracy</b>	Temperature: ± 0.4 °C @ 25 °C (32.8 °F @ 77 °F) Humidity: ± 3% @ 25 °C (77 °F) and 20 - 80% RH				
<b>Analog Output Type</b>	4-20 mA	-	4-20 mA		-
<b>Advanced Functions</b>	Dew point retransmission	Dew point indication	Dew point retransmission		Battery level dew point indication
<b>Communication</b>	Through TxConfig adapter	RS485 Modbus RTU	Through TxConfig adapter		USB mini-B type NOVUS Air (IEEE 802.15.4)
<b>Approvals</b>	CE				Anatel (0172-13-7089) FCC and CE
<b>Operating Conditions (Housing)</b>	-10 to 65 °C (14 to 149 °F) 0 to 95% RH	-40 to 70 °C (-40 to 150 °F) 0 to 95% RH	-10 to 65 °C (14 to 149 °F) 0 to 95% RH		-10 to 70 °C (14 to 158 °F) 0 to 95% RH
<b>Power Supply</b>	12-30 Vdc	12-30 Vdc	12-30 Vdc		12-30 Vdc or Replaceable 3.6 V Lithium battery
<b>Ingress Protection</b>	Housing: IP65 Probe: IP40				IP40





## High Accuracy Relative Humidity and Temperature Transmitter

**RHT Climate** relative humidity and temperature transmitter provides highly accurate and stable measurements and transmits both signals via two independent analog outputs and the RS485 Modbus RTU communication. The **RHT Climate** is fully USB configurable through its free **SigNow** software which also performs diagnostics and input/output simulation, installation and commissioning tasks.

**RHT Climate** is available with or without LCD display for duct or wall mounting with different probe lengths.

- High accuracy measurement
- Large display with backlight
- Configurable analog outputs
- Configuration via USB or front keys
- Alarm outputs and buzzer



**RHT Climate**

### Duct Mounting



RHT Climate WM	RHT Climate WM LCD	RHT DM	RHT DM 485 LCD	RHT Climate DM	RHT Climate DM LCD
Integrated RHT probe	Integrated RHT probe	Integrated RHT probe (options: 150, 250, and 400 mm)			
Temperature: -40 to 60 °C (-40 to 140 °F) Humidity: 0 to 100% RH	Temperature: -40 to 60 °C (-40 to 140 °F) Humidity: 0 to 100% RH	Temperature: -40 to 120 °C (-40 to 248 °F) Humidity: 0 to 100% RH	Temperature: -40 to 100 °C (-40 to 212 °F) Humidity: 0 to 100% RH		
Temperature: ± 0.4 °C (0 to 60 °C) (32 to 140 °F); Humidity: ± 1.8% RH @ 0 - 60 °C (32 to 140 °F) and 0 - 90% RH	Temperature: ± 0.4 °C (0 to 60 °C) (32 to 140 °F); Humidity: ± 1.8% RH @ 0 - 60 °C (32 to 140 °F) and 0 - 90% RH	Temperature: ± 0.4 °C @ 25 °C (32.8 °F @ 77 °F) Humidity: ± 3% @ 25 °C (77 °F) and 20 - 80% RH	Temperature: ± 0.4 °C (0 to 60 °C) (32 to 140 °F); Humidity: ± 1.8% RH @ 0 - 60 °C (32 to 140 °F) and 0 - 90% RH		
4-20 mA or 0-10 V (10-0 V)	4-20 mA or 0-10 V (10-0 V)	4-20 mA	-	4-20 mA or 0-10 V (10-0 V)	
Psychrometric properties, alarm buzzer, 2 digital outputs, maximum and minimum values, simulation of inputs, simulation of outputs, custom calibration and front keys (LCD version only)	Psychrometric properties, alarm buzzer, 2 digital outputs, maximum and minimum values, simulation of inputs, simulation of outputs, custom calibration and front keys (LCD version only)	Dew point retransmission	Dew point indication	Psychrometric properties, alarm buzzer, 2 digital outputs, maximum and minimum values, simulation of inputs, simulation of outputs, custom calibration and front keys (LCD version only)	
USB Micro-B Type and RS485 Modbus RTU	Through the TxConfig adapter	RS485 Modbus RTU	USB Micro-B Type and RS485 Modbus RTU		
CE	CE				
-40 to 60 °C (-40 to 140 °F) 0 to 95% RH	-10 to 65 °C (14 to 149 °F) 0 to 95% RH	-40 to 100 °C (-40 to 212 °F) 0 to 95% RH	-40 to 60 °C (-40 to 140 °F) 0 to 95% RH		
12-30 Vdc	12-30 Vdc				
Housing: IP65 Probe: IP30 or IP40	Housing: IP65 Probe: IP40		Housing: IP65 Probe: IP30 or IP40		

# Temperature Transmitters

## Head Mounted Temperature Transmitter

**TxBLOCK-USB** is an excellent and powerful high-accuracy loop-powered head mounted temperature transmitter. It accepts several types of sensors – thermocouples, Pt100, Pt1000, NTC and 0-50 mV signal – all-in-one model, with linearized 4-20 mA output and configurable measurement range.

The innovative built-in USB port allows configuration, easy commissioning and fine tuning on periodic calibration reviews.



**TxBLOCK-USB**

	Sensor Probe Mounting			Wall Mounting	Head Mounting
	TxMini M12	TxMini M12 485	TxMini DIN43650	TEMP WM 4-20mA	TxBLOCK-USB
Type	Pt100 / Pt1000 sensor programmable range	Pt100 sensor programmable range	Pt100 / Pt1000 sensor programmable range	Integrated probe	Universal programmable
Accuracy	0.2% of span			0.9% of span	Pt100 / mV: 0.2 % span T/C: 0.15% range ±1 °C (± 1.8 °F) NTC: 0.7% span
Input Type	Pt100 and Pt1000	Pt100	Pt100 and Pt1000	Integrated temperature sensor	J, K, T, N, R, S, B, E, Pt100, Pt1000, NTC, and 0-50 mV
Output Type	4-20 mA 20-4 mA			4-20 mA 20-4 mA	4-20 mA 20-4 mA
Range	-200 to 650°C (-328 to 1202 °F)	-200 to 600°C (-328 to 1112 °F)	-200 to 650°C (-328 to 1202 °F)	-50 to 120°C (-58 to 248°F)	See manual
Configuration Interface	TxConfig M12 interface		TxConfig DIN43650 interface	TxConfig USB interface	USB Micro-B Type
Software	SigNow	SigNow	SigNow	SigNow	SigNow
Operating Conditions	-40 to 85 °C (-40 to 185 °F) 0 to 90% RH			-20 to 65 °C (-4 to 149 °F) 0 to 90% RH	-40 to 85 °C (-40 to 185 °F) 0 to 90% RH
Power Supply	Loop powered 4-20 mA (8 - 35 Vdc)	7 - 40 Vdc	Loop powered 4-20 mA (8 - 35 Vdc)	12 - 30 Vdc	Loop powered 4-20 mA (12 - 35 Vdc)
Dimensions	51.2 mm x 20 mm (2.01 in x 0.79 in)	59.7 mm x 20 mm (2.35 in x 0.79 in)	28.5 mm x 28.5 mm (1.12 in x 1.12 in)	70 mm x 60 mm (2.75 in x 2.36 in)	34 mm x 18 mm (1.34 in x 0.71 in)
Housing	Polyamide		ABS UL94-HB	Polycarbonate	ABS UL94-HB
Format/ Mounting	M12 Connector Thread PG9 to Probe		DIN43650 Connector M24x2 Screw	Wall	Head



# HART® Temperature Transmitters

The **TxlsoRail-HRT** temperature transmitter combines the proven quality of HART® certification with the robustness of **NOVUS** devices. It is compatible with HART® certified devices and has electrical isolation between input and output, supporting voltage surges up to 1.5 kVrms.

Using a worldwide known protocol, with over 40 million field instruments supporting HART® technology, **NOVUS TxlsoRail-HRT** temperature transmitter enables the use of standard HART® configuration and supervision software that provides users with great flexibility in remote configuration and calibration capability through the two-wire 4-20 mA current loop without having to remove it from the plant.

**TxlsoRail HRT** and **TxlsoBlock HRT**, the **NOVUS HART®** temperature transmitters, are fully compatible with HART® certified devices from worldwide market. Full configuration can be done only with two-wire 4-20 mA current loop, providing more features for device configuration and monitoring and this is the big spotlight of the HART® devices. When a configuration change is needed, for example, remote interaction can be done with the device without removing it from the installation place.



**TxlsoBlock HRT**



**TxConfig HRT Configurator**



**TxlsoRail HRT**



## DIN Rail Mounting



TxlsoPack	TxlsoBlock HRT	TxRail USB	TxlsoRail	TxlsoRail HRT
Universal isolated programmable	Universal isolated HART programmable	Universal programmable	Universal isolated programmable	Universal isolated HART programmable
Pt100 / mV: 0.2 % span T/C: 0.7% span	Pt100 / mV: 0.15 % span T/C: 0.15 % span ±1 °C (± 1.8 °F) NTC: 0.45% span	Pt100 / mV: 0.2 % span T/C: 0.15% span ±1 °C (± 1.8 °F) NTC: 0.7% span	Pt100, mV e mA: 0.2 % span T/C: 0.2% span ±1 °C	Pt100 / mV: 0.15 % span T/C: 0.15 % span ±1 °C NTC: 0.45% span
J, K, T, N, R, S, B, E, Pt100, and 0-50 mV	J, K, T, N, R, S, B, E, Pt100, Pt1000, NTC, and 0-50 mV	J, K, T, N, R, S, B, E, Pt100, Pt1000, NTC and 0-50 mV	J, K, T, N, R, S, B, E, Pt100, 0-50 mV, 0-10 V, 0-20 mA, and 4-20 mA	J, K, T, N, R, S, B, E, Pt100, Pt1000, NTC and 0-50 mV
4-20 mA 20-4 mA	4-20 mA	4-20 mA (20-4 mA) 0-10 V (10-0 V)	4-20 mA 20-4 mA	4-20 mA
See manual		See manual		
USB Mini Type	Through TxConfig-HRT interface or HART® certified handheld	USB Micro-B Type	TxConfig-USB Interface	Through TxConfig-HRT interface or HART® certified handheld
SigNow	SigNow or HART® certified software	SigNow	SigNow	SigNow or HART® certified software
-20 a 75 °C 0 a 90% RH	-40 to 85 °C (-40 to 185 °F) 0 to 90% RH	-40 to 85 °C (-40 to 185 °F) 0 to 90% RH		
Loop powered 4-20 mA (12 - 35 Vdc)	Loop powered 4-20 mA (8.5 - 36 Vdc)	Loop powered 4-20 mA (12 - 35 Vdc)	Loop powered 4-20 mA (12 - 35 Vdc)	Loop powered 4-20 mA (8,5 - 36 Vdc)
44 mm x 24 mm (1.73 in x 0.94 in)	43.5 mm x 20.5 mm (1.71 in x 0.79 in)	114 mm x 99.5 mm (4.49 in x 3.92 in)	77 mm x 72 mm (3.03 in x 2.83 in)	114 mm x 99.5 mm (4.49 in x 3.92 in)
ABS	ABS UL94-HB	ABS UL94-HB	-	ABS UL94-HB
Head		35 mm DIN rail		

# Pressure Transmitters

## Current Loop Indicator

**LoopView** is a two-wire 4-20 mA loop-powered indicator. Its excellent accuracy allows to indicate several variables like temperature, pressure, differential pressure, flow, pH, acceleration and others.

**LoopView** is powered by the current loop itself and it is meant to be inserted into sensors already installed in industrial facilities.

This device has a 4-digit display and 2 keys, which allow for quick and easy adjustment of indication range, decimal point position, digital signal filter and user calibration.

Parameter configuration is password protected and can be done directly via the front panel keys of the loop indicator.

- No extra power supply required
- DIN43650 standard sandwich assembly
- Legacy installation compatibility
- Push-button easy configuration



**LoopView**

## Ultra Low Differential Pressure Transmitter

Ideal for **HVAC, clean-room and flow measurement** applications, the **NP785** is an ultra low differential pressure transmitter for measuring very small overpressure, under-pressure and differential pressure in neutral, non-corrosive gaseous media. It provides a pressure proportional linear signal output with configurable measuring range via USB using the configuration software.

**NP785** can operate bi-directionally, providing the ability to measure differential pressure ranges **from vacuum to positive pressure**. It is housed in a DIN rail mountable ABS/PC enclosure and its nickel plated brass fittings accept pneumatic hoses with 4 or 6 mm internal diameter.

The analog output can be set to either 0-10 V or 4-20 mA while having an RS485 port with Modbus RTU communication protocol. Designed for HVAC and industrial environment, the NP785 ensures temperature compensation for long-term stability and complies with EMC standards, providing robustness and reliability for a wide range of applications.

- Available nominal ranges:  $\pm 50$  Pa ( $\pm 0.2$  inH<sub>2</sub>O) to  $\pm 68$  mbar ( $\pm 1$  Psi)
- Ranges fully configurable by software within rated range
- Temperature compensated for higher stability at low pressures
- Output signal DC 0 to 10 V or 4 to 20 mA and slave Modbus RTU, in one-only-model
- Resistant to overpressure
- Auto-zero Key
- Diagnostic LED



**NP785**





## Pressure Transmitters

The rangeability of **NP640** pressure transmitter brings versatility, allowing its transmission ranges to be turned down to up to 1/3 of its nominal range. Featuring high accuracy coupled with temperature stability, the **NP640** performs well in the most challenging applications and in harsh environments.

- Customer configuration of range via USB
- All stainless steel media compatibility
- High accuracy 0.25% of full scale
- Configuration by **SigNow** software and **TxConfig USB** interface



**NP640**

Through the **TxConfig DIN43650** interface and the free **SigNow** software the **NP6xx** pressure transmitters series can be fully configured according to customer's preferred range and unit needs (bar, mbar, Mpa, kPa, kgf / m<sup>2</sup>, kgf / cm<sup>2</sup>, atm, mH<sub>2</sub>O, psi).

In addition, output status can be set up for upscale or downscale alarm in case of error and zeroing function is also available. The **SigNow** software brings great versatility to the end user by allowing range configuration right in the process.



**Configuration via the TxConfig DIN43650 interface and the free SigNow software**



	NP400	NP640
<b>Pressure Sensor</b>	Piezoresistive (ceramic)	Polyisilicon piezoresistive (oil filled)
<b>Software Configuration</b>	-	SigNow (Through TxConfig DIN 43650 Interface)
<b>Transmission Rangeability</b>	-	3:1
<b>Pressure Range (bar)</b>	0...2, 5, 10, 16, 25, 40, 60, 100, 160, 250, 400	0...1, 4, 10, 16, 25, 40, 60, 100, 160, 250, 400
<b>Pressure Range (psi)</b>	0...30, 75, 150, 200, 400, 600, 900, 1500, 2000, 4000, 6000	0...15, 60, 150, 250, 375, 600, 900, 1500, 2000, 4000, 6000
<b>Material in Contact with the Medium</b>	Stainless steel 316 / FKM / ceramic (Al 203 96%) <sub>3</sub>	All stainless steel 316
<b>Housing Material</b>	Stainless steel 316	
<b>Power Supply</b>	11 ~ 33 Vdc	
<b>Output Signal</b>	4-20 mA	
<b>Accuracy (Including Hysteresis, Linearity and Repeatability)</b>	<60 bar ± 0.5 % FS >100 bar ± 1.0 % FS	± 0.25 % FS
<b>Process Connection</b>	¼ NPT , ½ NPT , ½ BSP , ¼ G	
<b>Electrical Connection</b>	DIN 43650 connector	
<b>Operating Temperature</b>	- 20 to 70 °C (-4 to 158 °F)	
<b>Thermal Drift</b>	< ± 0.06 % FS/°C	< ± 0.05 % FS/°C
<b>Dynamic Response</b>	< 30 ms	
<b>Overpressure</b>	2 x FS	

# Controllers

## PID Controller with LCD Display

**N1050** is a PID temperature controller with LCD that combines high performance and vivid design. It combines the proven robustness of **NOVUS** PID algorithm with a large and bright easy-to-read dual color 11-segment LCD display with alphanumeric mnemonics and crystal clear status signaling.

It also features 5 ramp-and-soak profile programs, soft start output and timer function which complement the advanced features of the controller.

- Wide and high contrast dual color LCD display
- Distinguished multi angle viewing
- Compact depth, suitable for restricted spaces
- Elegant design for machines
- Ramp and Soak programs and timer function



**N1050**

### Temperature PID Controllers



	N1030	N1030T	N1040	N1040T	N1020	N1050	N480D
<b>Input Sensor</b>	J, K, T and Pt100				J, K, T, R, S, E, N, Pt100 and 0-50mV	J, K, T, S and Pt100	J, K, T, R, S, E, N and Pt100
<b>PID Control Features</b>	Auto tune				Auto tune Self adaptive	Auto tune	Analog (optional) Auto tune
<b>Control Action</b>	Heating or cooling						Heating or cooling
<b>Control Output</b>	1 pulse Up to 2 relays		1 pulse Up to 3 relays Analog (optional)	1 pulse Up to 3 relays	1 pulse 1 relay	1 pulse Up to 3 relays Analog (optional)	
<b>Ramp and Soak</b>	-	-	-	-	1 ramp	5 programs 4 segments	1 program 9 segments
<b>Special Functions</b>	1 alarm (6 types)		Soft-start PID loop break detection 2 alarms (6 types)			2 alarms (7 types)	2 alarms (8 types)
<b>Advanced Functions</b>	-	Timer	-	-	Timer	-	-
<b>Optional Resources</b>	-	-	RS485 Modbus	-	-	RS485 Modbus	-
<b>Bluetooth</b>	-						
<b>USB Configuration</b>	-	-	Quicktune				Quicktune
<b>Certification</b>	CE, UL	CE, UL	CE, UL	CE, UL	CE, UL	CE, UL	CE, UL
<b>Power Supply</b>	100-240 Vac/dc or 12-24 Vdc (optional)						
<b>Housing</b>	48x48 DIN 1/16				48x24 DIN 1/32	48x48 DIN 1/16	48x48 DIN 1/16





## Compact PID Controller

**N1030** is a temperature controller that features a high performance PID algorithm in a **very compact housing** with **only 35 mm depth**.

Its innovative compact construction and the convenient **detachable connector** provide an easy set up on short profile panels, optimizing scarce space and reducing installation cost. It has two outputs always available which can be configured both as a control or an alarm.

- Compact profile, only 35 mm depth
- Detachable connector simplifies device installation, commissioning and maintenance
- IP 65 protection rate ensures resistance to water jets
- Protection and safety according to UL94 V-2 anti-flame housing
- Timer and two relay options to suit different processes



### Process PID Controllers




N960	N120	N1200	N1200 HC	N20K48	N2000	N2000 S	N3000
J, K, T, R, S, E, N and Pt100	J, K, T, R, S, E, B, N, Pt100, 4-20mA, 0-50mV, 0-5V and 0-10V	J, K, T, R, S, E, B, N, Pt100, 4-20mA, 0-50mV, 0-5V and 0-10V		J, K, T, R, S, E, B, N, Pt100, 4-20mA, 0-50mV, 0-5V and 0-10V	J, K, T, R, S, E, B, N, Pt100, 4-20mA, 0-50mV and 0-5V	J, K, T, R, S, N, Pt100, 4-20mA, 0-50mV and 0-5V	J, K, T, R, S, E, B, N, Pt100, 4-20mA, 0-50mV and 0-5V
Analog (optional) Auto-tuning	Auto-tuning	Auto-tuning Auto-adaptive		PWM & analogic Auto-tuning Auto-adaptive	Auto-tuning		Analog (optional) Auto-tuning
Heating or cooling	Heating & cooling with overlap	Heating or cooling	Heating & cooling with overlap	Heating or cooling		Slave	Heating or cooling
1 pulse 2 relays 1 analog	1 pulse 2 relays	1 pulse Up to 3 relays 1 analog		Up to 25 pulse* Up to 9 relays* Up to 8 analog*	1 pulse Up to 4 relays 1 analog		
1 program 9 segments	20 programs 9 segments	20 programs 9 segments			7 programs 7 segments		
2 alarms (8 types)	Soft-Start Bumpless Manual/auto PID loop break 2 alarms (7 types)	Soft-Start Bumpless Manual/auto PID loop break 4 Alarms (8 types)			Soft-Start Bumpless Manual/auto 4 alarms (7 types)	Soft-Start Bumpless Manual/auto 2 alarms (9 types)	Soft-Start Bumpless Manual/auto 4 alarms (7 types)
-	Digital input	Digital Input Remote SP SP retransmission Square root		Digital Input* Remote SP* Square root	Digital input Remote SP SP retransmission Square root 24 Vdc output	Digital input Retransmission SP Square root 24 Vdc output	Digital input Remote SP SP retransmission Square root 24 Vdc output
-	Data logger	RS485 Modbus Heater break 24 Vdc output + 2 I/O	RS485 Modbus 24 Vdc output + 2 I/O	RS485 Modbus*	RS485 Modbus		
-	-	-	-	Yes	-	-	-
Quicktune	Quicktune	Quicktune	Quicktune	Quicktune and Quicktune Mobile	Quicktune	-	Quicktune
CE, UL	CE, UL	CE, UL	CE, UL	CE, Anatel and FCC	CE, UL	CE, UL	CE, UL
100-240 Vac/dc or 12-24 Vdc (optional)	100-240 Vac/dc	100-240 Vac/dc or 12-24 Vdc (optional)					
96x96 DIN 1/4	Open board Dual display	48x48 DIN 1/16	48x48 DIN 1/16	48x48 DIN 1/16	96x48 DIN 1/8	96x96 DIN 1/4	96x96 DIN 1/4

\*Using micromodules

# Controllers

## Modular Process Controller

- **Adaptable resources** by adding micromodules
- **Wireless** diagnostics and easy field maintenance
- **Lowest depth** controller in the market
- Smartphone and PC **friendly configuration**

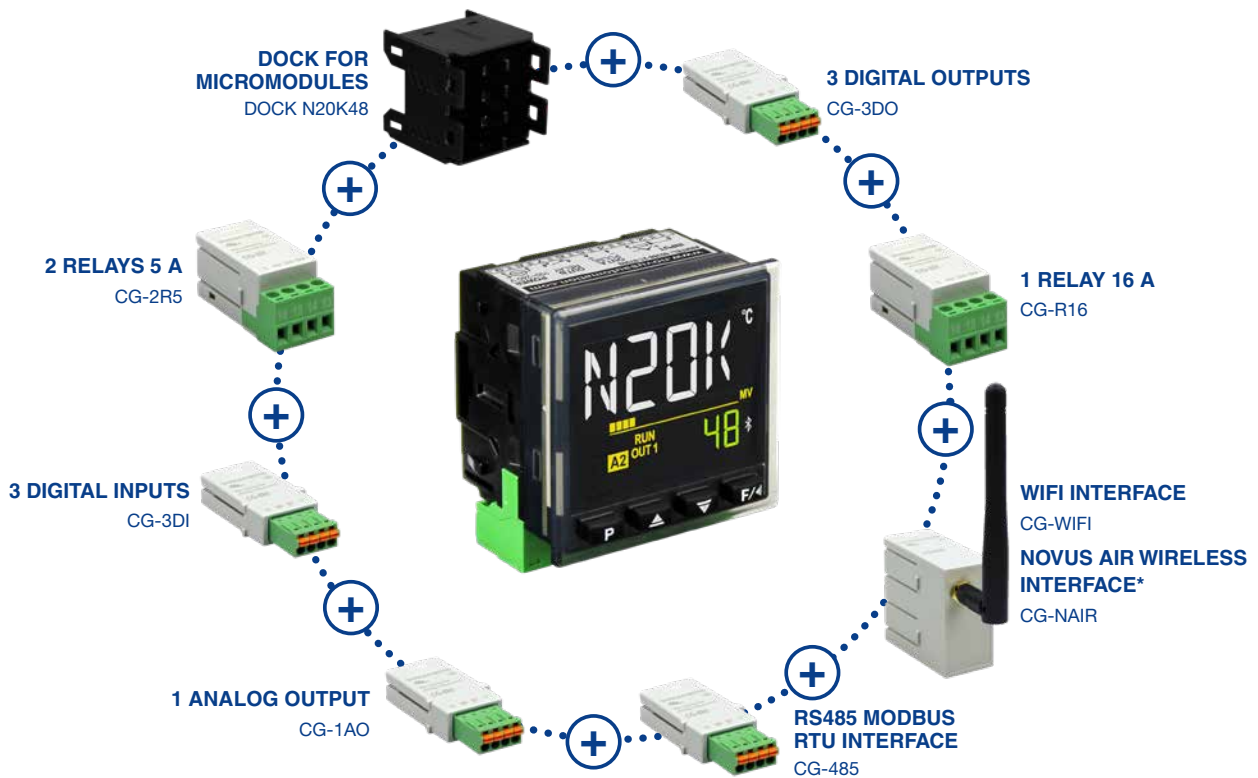

\*IN DEVELOPMENT





# Software Interface

## Configuration Software to Controllers and Indicators

**QuickTune** is a free software tool to configure **NOVUS** controllers and indicators. With its clean interface, any user can friendly access and modify all device functions for proper configuration. Designed to easy and quick commissioning, it provides diagnosis and monitoring resources to field technicians. More than a software, **QuickTune** is a tool. Furthermore, **QuickTune** offers the main features to meet most users and profile needs in the industry.

- Friendly and Clean Interface
- Allows Quick Commissioning
- Provides Device Configuration Management
- Unified tool for Controllers and Indicators
- Graphic Ramp and Soak Assistant



**QuickTune**



### BATCH CONFIGURATION

Certain applications require annoying tasks, which is to replicate the configuration of many devices. The batch configuration offers the appropriate environment to set plug-and-play device configuration in sequence.




### GRAPHIC RAMP AND SOAK ASSISTANT

Temperature applications with complex profiles should be translated from process recipe requirements to ramp and soak parameters. The assistant tool provides a wide graphical perspective of the process with intuitive features such as sliders, drag-and-drop and clicks over the chart, transcribing all setting automatically to ramp and soak data table.

### VIA USB AND BLUETOOTH



### VIA RS485 (MODBUS RTU)

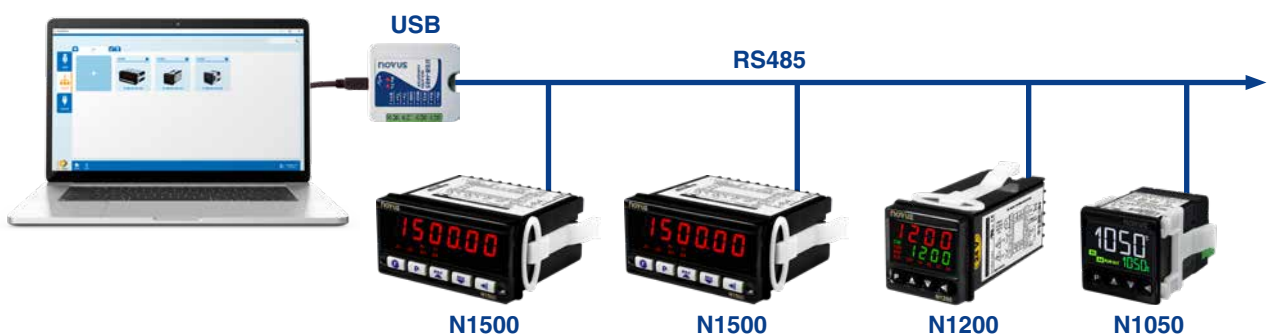

# Electronic Thermostats

## Refrigeration Thermostat with Defrost

- Refrigeration control with automatic defrost
- Defrost by compressor stop, resistance heating or reverse cycle
- Programmable defrost cycle intervals
- Keeps indication during defrosting cycle
- Programmable delay on power-up to prevent simultaneous loads
- Control relay can directly switch compressor up to 1 hp

### Models:


**N321R:** one output for compressor, accepts sensor type NTC, Pt100 or Pt1000 and optional voltage protection for compressor

**N323R:** three outputs (compressor, defrost and fan), monitors 2 NTC sensors (chamber and evaporator)

**N323TR:** similar to **N323R** plus real time clock for scheduling defrost events, with weekly timer,

### Typical application:

Refrigeration cooling counters and air conditioning systems

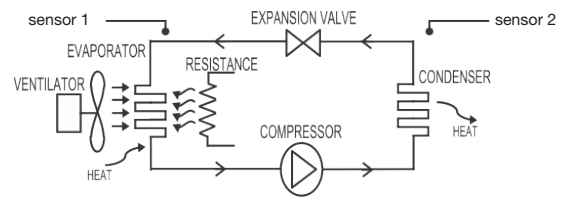

## Solar Heating Controller

- Ideal for solar panels applications
- Operates by the temperature difference between the solar collector and the storage tank
- Uses 2 NTC type sensors (included)
- Output control relay drives the water circulation pump
- Protection against pipeline overheating or freezing


### Models:

**N321S:** one output for circulation pump

**N322S:** two outputs for circulation pump and waer heater booster

### Typical application:

Thermal tank, pool heating, and boiler

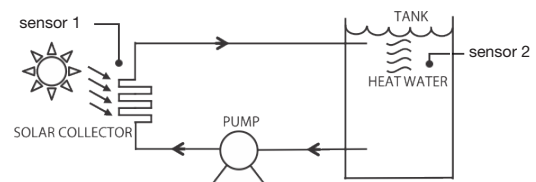

## Cooling/Heating Controller

- Control with alarm or multi-stage
- Direct drive of compressors or electric heaters
- Programmable delay on powerup to avoid simultaneous switching
- Low, high or differential alarm functions
- Sensor type: NTC, Pt100, Pt1000, and thermocouples J, K and T

### Models:


**N321:** one relay output control

**N322:** two outputs (control and alarm or second control)

**N323:** three outputs (control and 2 alarms or 3 control stages)

### Typical application:

Cold chambers, ovens, food industry, and commercial refrigerators

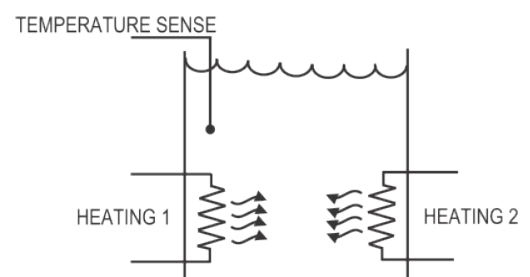





## Controller with Timer


- Suitable for processes with cyclic operation requirement
- Timer for forced defrost cycle or stirring of liquids
- Accepts the following sensors: NTC, Pt100, Pt1000, and thermocouples J, K and T
- Programmable delay on powerup to avoid simultaneous switching
- Control relay can directly switch compressor up to 1 hp
- Optional: audible alert and voltage protection for compressor

### Models:

**N322T:** two outputs (control and defrost or timer output)

### Typical application:

Milk cooling and ice cream machines

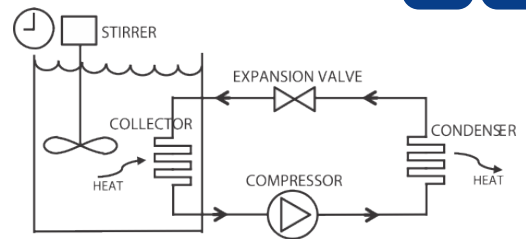

## Electronic Humidistat

- Environment control, displays temperature and humidity
- Configurable interval between temperature and humidity indication
- Control relay can directly switch compressor up to 1 hp
- Heating or cooling temperature control
- Humidification or dehumidification control
- Uses integrated RHT probe (sold separately)


### Models:

**N322RHT:** two relay outputs (either control or alarm)

**N323RHT:** three relay outputs (control, alarm or timer function)

### Typical application:

Climate chambers, textile processes, and environmental control

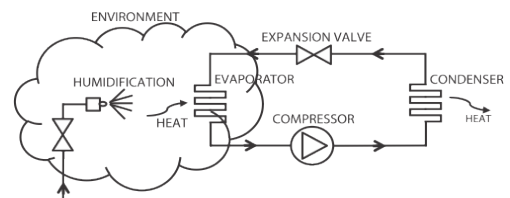

## Egg Incubator Controller


- Control of humidity and temperature in the incubator (heating and humidification or refrigeration and dehumidification)
- Cycle timing control for egg rolling
- Configurable interval between temperature and humidity indication
- Uses integrated RHT probe (sold separately)

### Models:

**N323RHT (EI):** three outputs (humidifier, heating and egg roll motor)

### Typical application:

Egg incubators

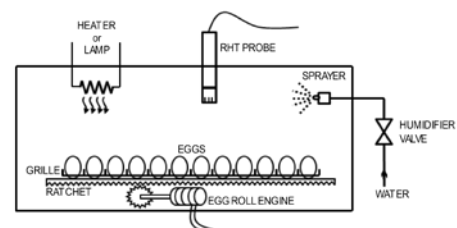

# Indicators

## Panel Meters

**N1540** is a high technology process indicator designed for the best performance and reliability in most demanding applications. Based on an advanced and rugged hardware platform, the **N1540** can be fully configured from the frontal keyboard or USB port. The exclusive USB interface allows, for example, to configure several devices with the same parameters in an easy way, saving time in the setup. Compact, the device has a 34 mm depth and can be easily installed in panels where space is restricted.

- Universal input: TCs J, K, T, E, N, R, S, B, Pt100, 0-50 mV, 0-5 V, 0-10 V, 0-20 mA, and 4-20 mA
- Sampling rate up to 50 samples per second
- Two relays SPST 1.5 A / 240 Vca
- Holds minimum and maximum values



Cost Effective	Advanced Features				
----------------	-------------------	--	--	--	--



	N1040i	N1540	N1500G	N1500	N1500 FT	N1500 LC
<b>Indicator Type</b>	Universal		Universal		Flow rate	Load cell
<b>Input Type</b>	Thermocouples, Pt100, voltage and current		Thermocouples, Pt100, voltage and current		4-20 mA, NPN, PNP, dry contact or magnetic signal	Voltage and current
<b>Accuracy</b>	J, K, T, E: 0.25% ± 1 °C (± 1.8 °F) N, R, S, B: 0.25% ± 3 °C (± 5.4 °F) Pt100: 0.20% Voltage/Current: 0.2%		J, K, T, E: 0.25% ± 1°C (± 1.8 °F) N, R, S, B: 0.25% ± 3°C (± 5.4 °F) Pt100: 0.20% Voltage/Current: 0.2%		4-20 mA: ±0.2% of span Pulse: ±30 ppm @25 °C (77 °F) Magnetic: ±0.1 % @25 °C (77 °F)	0.2 % span
<b>Resolution</b>	15 bits		>14 bits	17 bits	15 bits	17 bits
<b>Programmable Range</b>	-1999 to 9999	-2000 to 30000	-1999 to 9999	-31000 to 31000 0 to 60000 0 to 120000	Scale factor	-31000 to 31000 0 to 60000 0 to 120000
<b>Sampling Rate</b>	55 sps		5 sps	5 to 15 sps	-	15 sps
<b>Alarms</b>	2 setpoints 7 alarm types 2 relay outputs		2 setpoints 7 alarm types 4 timing modes 2 relay outputs	4 setpoints 7 alarm types 4 timing modes 2 (up to 4) relay outputs	2 (up to 4) setpoints 4 alarm types 4 timing modes 2 (up to 4) relay outputs	4 setpoints 7 alarm types 4 timing modes 2 (up to 4) relay outputs
<b>Special Features</b>	Optional 24 Vdc output	Hold maximum / minimum custom linearization 24 Vdc output	Hold maximum / minimum custom linearization Square root Digital Input retransmission 24 Vdc output		Hold maximum / minimum Custom linearization Square root Digital input Analog retransmission Pulse retransmission 24 Vdc output	Hold maximum / minimum Custom linearization Digital input retransmission 10 Vdc or 5 Vdc output
<b>Communication Interface</b>	USB (Mini-B type) Optional RS485 Modbus		Optional RS485 Modbus			
<b>Certification</b>	CE,UL		-		CE, UL	
<b>Frontal Protection Rate</b>	IP65		IP30		IP65	
<b>Power Supply</b>	100-240 Vac/dc or 12-24 Vdc		100-240 Vac/dc or 12-24 Vdc			
<b>Housing</b>	48x48 DIN 1/16	96x48 DIN 1/8	310 x 110 x 37 mm panel (12.20 x 4.33 x 1.46 in)		96x48 DIN 1/8	



# Accessories

## SSR - Solid State Relay

Increased lifetime, due to the fact that there are no moving parts, and thus, no mechanical wear. Internal protection circuit (Snubber) of the Output. **Zero cross switching**, which implies lower electrical noise. Silent operation. Control INPUT signal **optically isolated** from the OUTPUT. Suitable for replacing the contactor in AC installation.



SSR

## Power Supply

The **NOVUS EDA Power Supplies** have **full range voltage input**, high efficiency, **DIN rail support** and operation temperature up to 70 °C. Attending **international standards and certifications** they are a robust solution to provide 24 Vdc for any industrial application.



EDA

## Power Supply

The **FTR power supply** is a switching mode power supply to be connected directly to the line providing an isolated output. It is suitable for powering instruments such as 4-20 mA field transmitters.

The **FTR power supply** is designed to DIN rail mounting, inside electrical panel. Avoid excessive vibration, humidity, temperature and electromagnetic interference.



FTR

## USB Port (Mini-B type) Panel Extension

**USB port (Mini-B type) panel extension** so that the USB is accessible on the panel. With a 30 cm extension, it makes the USB connection of the controller / indicator providing a mini-B type USB to fix on the panel with rubber-cap protection.



# Vertical Energy

## Switchgear Temperature Monitoring

**NOVUS** has launched **Telik Gardo**, a wireless remote temperature monitoring system for assets such as switchgear in power distribution systems. This solution enables online information for maintenance or loss management.

With wireless temperature sensors, **Telik Gardo** is simple and easy to install and deploy. It can be integrated with any SCADA system directly or any Cloud platform using an IoT Gateway, like the **AirGate 4G**.



**Telik Gardo**

## Wireless Electrical Transformer Monitoring

**NOVUS** is launching the **Telik Trafo**, a wireless smart device capable of remote monitoring of current, voltage and temperature of distribution transformers. It provides assertive information for asset, energetic balance or loss management, checkinf transformer performance and load characteristics, allowing operation and maintenance teams to react on time.

Its wireless communication allows electricity companies to widespread monitoring.



**Telik Trafo**

## Wireless Temperature Transformer Monitoring

**NOVUS** is launching the cost effective **Telik Trafo Lite**, a wireless device capable of remote monitoring of distribution transformers **temperature**. It checks continously the transformer body temperature, providing undstanding of load characteristics and thus predicting any anomaly or degradation. This assertive information of the assets allows management to react on time, moving operation and maintenance teams to the field to the right location.

Telik Trafo Lite features **long-range communication, battery operation** and **5-year lifespan**.



**Telik Trafo Lite**

# Metrology Laboratory



## Choosing the right partner ensures your customer satisfaction

**NOVUS Metrology Lab** is ISO-17025 accredited by the Brazilian National Calibration Body, a signatory of the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Agreement (MRA). Its calibration certificates are recognized in over 70 countries, covering metrology services for temperature, relative humidity, pressure, electrical parameters, conductivity and pH instruments.

Customized services to meet our customer's expectations of deadline and application is what makes **NOVUS Metrology Laboratory** the right partner for your business bringing all the credibility that an accredited service with internationally recognized certificate can offer.



### Economy

- Calibration at **NOVUS** facilities.
- You buy the device and the service with just one process.
- Avoid additional logistic costs.



### Productivity

- Field calibration services (please check covered regions).
- Highly qualified professionals.
- The device is calibrated at the points and ranges you need.



### Agility

- Devices calibrated from the factory.
- Customized and scheduled services.



### Trustworthy

- High accuracy: significantly lower uncertainty values.
- ABNT NBR ISO/IEC 17025.

## SCOPE OF ACCREDITATION



Temperature and Humidity



Electricity and Magnetism



Pressure







**We measure with accuracy.  
We control with excellency.  
We record with reliability.**

#### **CANOAS - Headquarter**

Rua Engenheiro Homero Carlos Simon, 737 - Guajuviras  
Cep: 92442-000 - Canoas - RS - Brasil  
Phone: +55 51 3323-3600

#### **SÃO PAULO**

Rua Sampaio Viana, 75 / 12<sup>th</sup> floor - Paraíso  
Cep: 04004-000 - São Paulo - SP - Brasil  
Phone: +55 11 3097-8466  
[sp@novusautomation.com](mailto:sp@novusautomation.com)

#### **CURITIBA**

Rua Sete de Setembro, 4848 Cj.1302 - Batel  
Cep: 80240-000 - Curitiba - PR - Brasil  
Phone: +55 41 3244-0514  
[pr@novusautomation.com](mailto:pr@novusautomation.com)

#### **ARGENTINA**

Zapiola, 829 C1426ATQ - Colegiales  
Buenos Aires - Argentina  
Phone: +54 11 4554-6441  
[argentina@novusautomation.com](mailto:argentina@novusautomation.com)

#### **USA - ILLINOIS**

3 West Crystal Lake Avenue, Unit 2  
Crystal Lake, IL - 60014 - USA  
Phone: + 1 224 433 9952

#### **USA - FLORIDA**

201 South Biscayne Blvd, Suite 1200  
Miami, FL - 33131 - USA  
Phone: +1 786 235-2674  
[info@novusautomation.com](mailto:info@novusautomation.com)

#### **EUROPE - ITALY**

Via Oronte Nota 73  
10051 Avigliana (TO), Italie  
Phone: +39 380 185 2737  
[europe@novusautomation.com](mailto:europe@novusautomation.com)

Follow us on our social media



[www.novusautomation.com](http://www.novusautomation.com)

**NOVUS**  
We Measure, We Control, We Record