


T-8601/T-8602 Pistol Grip Vibration Reduced Needle Scalers

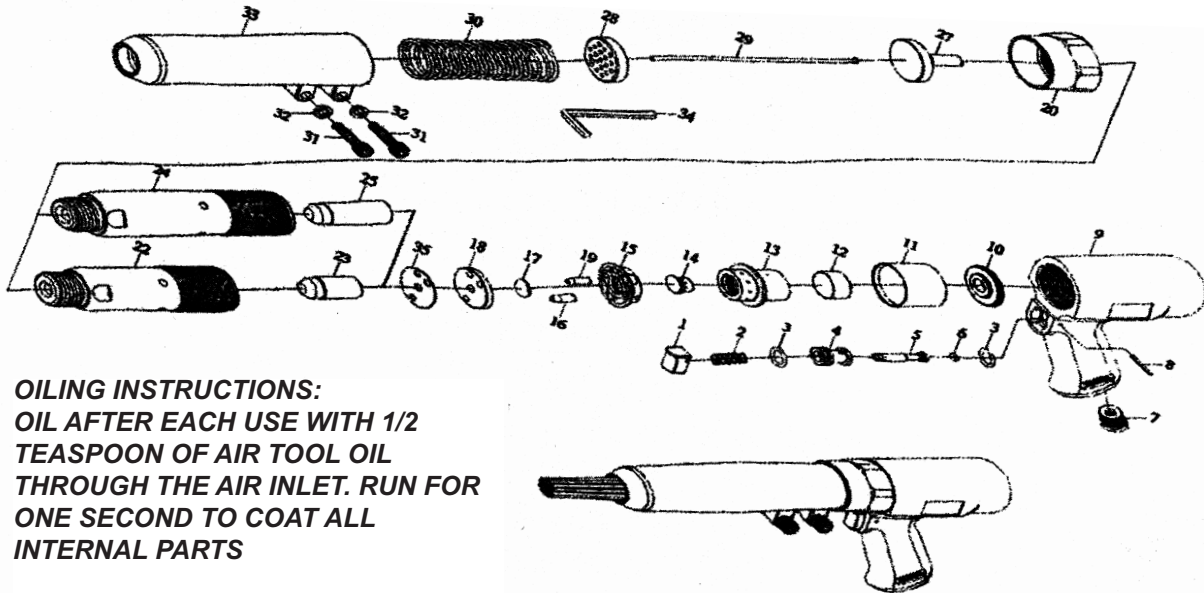

OILING INSTRUCTIONS:
OIL AFTER EACH USE WITH 1/2
TEASPOON OF AIR TOOL OIL
THROUGH THE AIR INLET. RUN FOR
ONE SECOND TO COAT ALL
INTERNAL PARTS

USE 90 PSI MAXIMUM

Ref #	Part #	Description	Qty.	Ref #	Part #	Description	Qty.
1	860101	Trigger Button	1	18	860118	Lower Valve Seat	1
2	860102	Valve Spring	1	19	860119	Dowel Pin	1
3	860103	O-Ring	2	20	860120	Exhaust Deflector (L)	1
4	860104	Valve Bushing	1	20A	860220	Exhaust Deflector (S)	1
5	860105	Throttle Valve Stem	1	22	860222	Cylinder	1
6	860106	O-Ring	1	23	860223	Piston	1
7	860107	Air Inlet	1	24	860124	Cylinder	1
8	860108	Pin	1	25	860125	Piston	1
9	860109	Handle	1	27	860127	Driver	1
10	860110	Valve Seat	1	28	860128	Needle Holder	1
11	860111	Inner Cylinder	1	29	T-735646	Needle Set (19 per set)	1 set
12	860112	Inner Piston	1	30	860130	Spring	1
13	860113	Valve Head	1	31	860131	Cap Head Screw	2
14	860114	Valve Cap	1	32	860132	Washer	2
15	860115	Upper Valve Seat	1	33	860133	Needle Tube	1
16	860116	Dowel Pin	1	34	860134	Hex Wrench (6 mm)	1
16A	860116A	Valve Assembly	1	35	860135	Spacer	1
17	860117	Valve Disc	1				

505 N. Railroad Ave. 33435
P.O. Box 1117 33425
Boynton Beach, Florida

SEE OUR CATALOG
at
www.taylorpneumatic.com

0116TPTC /all rights reserved /COPYRIGHT 2016 / final

Ph. (561) 732-1111
Fax (561) 731-4412
Toll Free 800-805-8665