

Auxiliaries

919 Blending Thinner

Product Description




Blending thinner designed to smooth transition areas from blend-in zones to old paintwork, by dissolving rough overspray area of new and existing finishes. Suitable for panel/spot repair.


Technical Characteristics

Colour: transparent Shelf life: 36 months at 25°C

Pre-treatment

See process described in **other HAMR TDS**.

	<p>Mixing Ratio</p>	<p>The product is ready for use.</p>
	<p>Application</p>	<p>1 thin coat right after the finish, second coat in 20 seconds.</p>
	<p>Drying</p>	<p>As recommended for the HAMR clear used.</p>
<p>Further Treatment</p>		<p>If necessary, minor defects can be sanded out with P2000 paper then polish with any standard fine polishing compound once the clearcoat has fully cured.</p>

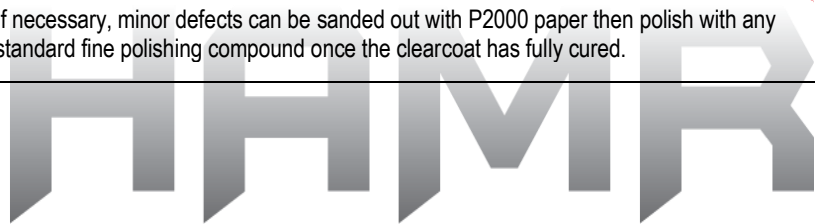

The products are suitable for professional use only. The data contained in this publication are based on our current knowledge and experience. You can obtain the latest version of technical data sheet directly from your supplier.

HAMR Coatings Pty Ltd. Australia. Tel (03 8797 5515) HAMRCOATINGS.COM ISSUE 15/10/2021 This supersedes all older data sheets.