

## 2.5" Low Voltage

### Non-IC Housing for Cabinet Use

Model

HR-800 2.5in Under  
Cabinet Remodel Housing

Example: **HR-800**

#### DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. May be used with any WAC compatible 2.5" HR-837, HR-834, or HR-836 trims.

#### FEATURES

- For cabinet use only
- Total depth of 4", one of the lowest profile recessed units available
- Low profile housing
- Transformer required
- 5 year warranty

#### SPECIFICATIONS

Construction:	20 gauge steel
Input:	12 VAC, 50/60Hz
Dimming:	ELV: %
Light Source:	Halogen MR16 ( Sold Separately )
Mounting:	No screws, nails or hardware required. Flat "wing" springs expand against the cut out hole to hold fixture against the surface
Cut Out:	3"
Ceiling Thickness:	3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:



## Enclosed Electronic Transformer

### 120V/12V Class 2 Power Supply

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

#### Model & Product

EN-12120-RB2 Enclosed Electronic Class 2 Transformer 120V Input 12V Output 2 x 60W = 120W  
 EN-12180-RB2 Enclosed Electronic Class 2 Transformer 120V Input 12V Output 3 x 60W = 180W  
 EN-12300-RB2 Enclosed Electronic Class 2 Transformer 120V Input 12V Output 5 x 60W = 300W  
 EN-1260-RB2 Enclosed Electronic Class 2 Transformer 120V Input 12V Output 60 Watt

#### L x W x H

6IN x 3.25IN x 2.625IN  
 6.75IN x 3.625IN x 2.625IN  
 8.25IN x 4.625IN x 2.625IN  
 6.625IN x 1.625IN x 1.25IN

Example: **EN-12120-RB2**

#### DESCRIPTION

UL & cUL listed electronic transformer is the perfect solution for wiring multiple low voltage fixtures. WAC transformers are intrinsically safer transformers because they are compartmentalized to allow no greater than 5 amps of current to be drawn on each compartment. Secondary wiring for transformers do not require conduit sheathed cable or clamp wiring techniques. This transformer has a low minimum load requirement of 1W to allow the use of LED products. May be dimmed using an electronic low voltage dimmer.

#### FEATURES

- 1W minimum load
- Use for all initial installations to ensure safe and primary side connections in a wiring compartment
- Dimming with Electronic Low Voltage dimmers
- All connections must be made in an enclosure for proper installations
- Secondary wiring for Class 2 transformers does not require conduit sheathed cable or clamp wiring techniques
- Non-metallic sheathed cable may be used for secondary wiring in walls and ceilings
- Drop down to a smaller gauge wire if space in fixture does not permit secure connection directly with the non-metallic sheathed cable
- Built-in auto reset, soft start, short and overload circuit
- 5 year warranty

#### SPECIFICATIONS

Input: 120 VAC, 50/60Hz  
 Finish: :Black  
 Operating Temp: -40°F to 122°F (-40°C to 50°C)  
 Standards: UL, cUL



#### FINISHES:



Black

## 2.5" Low Voltage

### Downlight Trim

Model & Light Source

Finish

Lumen

S

HR-836 Halogen MR16 HR-836LED LED MR16		BN Brushed Nickel CB Copper Bronze WT White
---	--	---

Example: **HR-836-BN**

#### DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. For use with HR-800 series low voltage housings. Accepts MR16 LED or incandescent lamp 50W max, housing and lamp are sold separately.

#### FEATURES

- Accommodates most LED MR16 or Halogen MR16 lamps
- Retention clips secure lens firmly to lamp
- Clear lens included, replaceable lens options available
- 5 year warranty

#### SPECIFICATIONS

Construction:	20 gauge steel with die-cast aluminum baffle
Light Source:	Halogen MR16, LED MR16
Finish:	Electrostatically Powder Coated:White, Electrostatically Powder Coated:Copper Bronze, Electrostatically Powder Coated:Brushed Nickel
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed

Fixture Type:


Catalog Number:

Project:


Location:



#### FINISHES:



#### LINE DRAWING:



## 2.5" Low Voltage

### Adjustable Trim

Model & Light Source

Finish

Lumen

S

HR-837 Halogen MR16 HR-837LED LED MR16		BK Black BN Brushed Nickel CB Copper Bronze WT White
---	--	---

Example: **HR-837-BK**

#### DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. For use with HR-800 series low voltage housings. Accepts MR16 LED or incandescent lamp 50W max, housing and lamp are sold separately.

#### FEATURES

- Accommodates most LED MR16 or Halogen MR16 lamps
- Retention clips secure lens firmly to lamp
- Clear lens included, replaceable lens options available
- 5 year warranty

#### SPECIFICATIONS

Construction:	20 gauge steel
Light Source:	Halogen MR16, LED MR16
Finish:	Electrostatically Powder Coated:White, Electrostatically Powder Coated:Black, Electrostatically Powder Coated:Copper Bronze, Electrostatically Powder Coated:Brushed Nickel
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed

Fixture Type:


Catalog Number:

Project:

Location:



#### FINISHES:

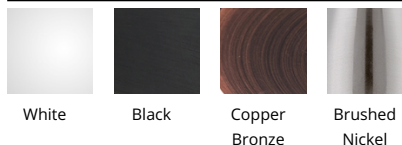

#### LINE DRAWING:

