


3" INGROUND 12V

5031

WAC

LANDSCAPE LIGHTING

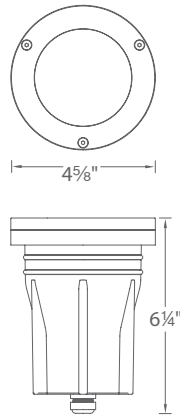

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Landscape Wall Wash luminaire

FEATURES

- Tiltable and adjustable beam angle
- Integral dimmer
- IP67 rated, protected from temporary immersion under water
- Drive over up to 4500lbs
- Solid diecast brass or corrosion resistant aluminum
- Available concrete pour kit
- 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed
- MLV dimmable with remote MLV dimmers

SPECIFICATIONS

Input: 9 - 15VAC (Transformer is required)
Power: 2W to 12W / 2VA - 17VA
Brightness: 70 lm to 505 lm
Beam Angle: 15° to 60°
CRI: 85
Rated Life: 55,000 hours

IEC safety Standard


	Walk over	Drive over
Resistance to static load test	Yes (1125lbs)	Yes (4496lbs)
Resistance to torque and shear loads test	N/A	Yes

ORDERING NUMBER

		Color Temp		Finish	
5031	3" Inground 12V	27	2700K	BZ	Bronze on Aluminum
		30	3000K	BBR	Bronze on Brass

Module Replacement

2700K	M5031LE-27BZ
3000K	M5031LE-30BZ



5031-_____

Example: **5031-30BBR**

waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

3" INGROUND 12V


5031

WAC


LANDSCAPE LIGHTING

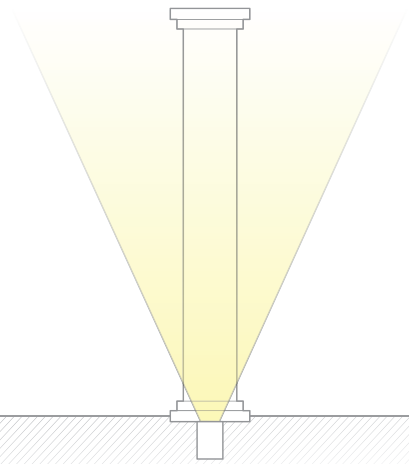


Typical Inground
*Most light output goes into the air,
causing light pollution*




Adjust Beam Angles
*Presets at
15°, 30°, 45°, 60°*




Adjustable WAC Inground
Adjust the light to where you need it

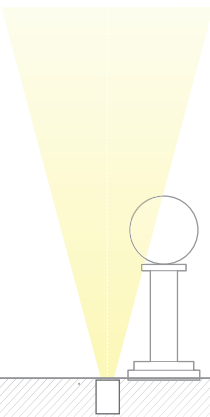

Typical Inground
*Most light output goes into the air,
causing light pollution*




Tilt and Aim
*Up to 40° of adjustability preset at
-20°, -10°, 0°, 10°, 20°*

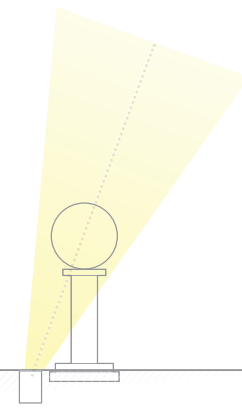

Adjustable WAC Inground
Adjust the light to where you need it



Control Brightness
*Adjustable from 70lm to 505lm
Presets Comparable to
10W, 25W, 35W, 50W, 75W Halogen source*

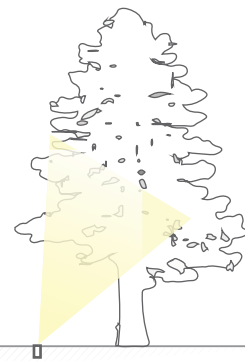

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

3" INGROUND 12V

5031

WAC

LANDSCAPE LIGHTING

Rock Guard

Protects the fixture face



5030-GRD-BZ
Bronze on Aluminum

5030-GRD-BBR
Bronze on Brass

Optics

Enhances saturation of florals and foliage



LENS-25-AMB
Amber

LENS-25-RED
Red

LENS-25-FR
Frosted

LENS-25-GRN
Green


LENS-25-BLU
Blue

LENS-25-HCL
Honeycomb Louver
Reduces glare

Concrete Pour Kit

For installation in concrete
Five 1/2" NPT threaded holes, PC

5030-PIP-PVC
Shown with temporary dense foam cap

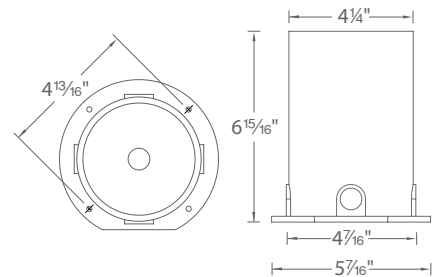

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories

9075-TRN-SS
75W Max

9150-TRN-SS
150W Max

9300-TRN-SS
300W Max

9600-TRN-SS
600W Max



waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760