

# WAC LIGHTING

## 4" Low Voltage

### Die-Cast Gimbal Ring Trim

Model & Light Source	Lumens	Finish
HR-D417 Halogen MR16 HR-D417LED LED MR16		BN Brushed Nickel WT White

Example: **HR-D417-BN**

#### DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

#### FEATURES

- Accommodates most LED MR16 or Halogen MR16 lamps
- Center lamp holder allows lamp to be tilted up to 25° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

#### SPECIFICATIONS

Construction:	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16, Halogen MR16
Finish:	Electrostatically Powder Coated:White, Electrostatically Powder Coated::Brushed Nickel
Standards:	UL, cUL, Damp Location Listed

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_




#### FINISHES:



White

Brushed  
Nickel

#### LINE DRAWING:



# WAC LIGHTING

## 4" Low Voltage

### Remodel Non-IC Housing

#### Model & Product

HR-8401E 4in Electronic  
Low Voltage Remodel Non-  
IC Housing

Example: **HR-8401E**

#### DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available with a variety of decorative adjustable and wet location trim options are available.

#### FEATURES

- Integral electronic transformer
- J-Box and transformer accessible through ceiling
- Advanced auto-reset, soft start and short circuit protection features
- Supplied thermal protector protects against over-lamping
- Suitable for 2" x 6" joist installations, for use in shallow applications
- Transformer included
- 5 year warranty

#### SPECIFICATIONS

Construction:	20 gauge galvanized steel
Power:	50W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Halogen
Mounting:	Two heavy gauge inner retention clips push out onto ceiling or other mounting surface to firmly hold housing in place
Cut Out:	4 9/16"
Ceiling Thickness:	3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

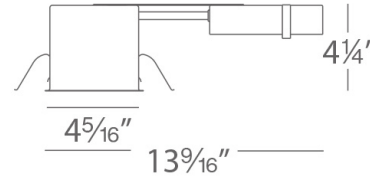

## 4" Low Voltage

### New Construction Non-IC Housing

#### Model & Product

HR-8402E 4in Electronic  
Low Voltage New  
Construction Non-IC  
Housing

Example: **HR-8402E**

#### DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available with a variety of decorative adjustable and Wet Location trim options are available.

#### FEATURES

- Integral electronic transformer
- J-Box and transformer accessible through ceiling
- Advanced auto-reset, soft start and short circuit protection features
- Supplied thermal protector protects against over-lamping
- Transformer included
- 5 year warranty

#### SPECIFICATIONS

Construction:	20 gauge galvanized steel
Power:	50W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Halogen
Mounting:	Supplied with hanger bars, adjustable from 15"-242" to accommodate various joist construction and grid sizes.
Cut Out:	4 9/16"
Ceiling Thickness:	3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

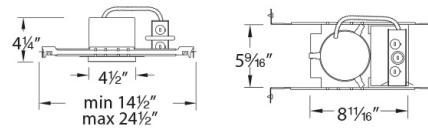

Fixture Type: \_\_\_\_\_







Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## 4" Low Voltage Die-Cast Gimbal Ring Trim

### ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	<b>LENS-16-RED</b> <b>LENS-16-GRN</b> <b>LENS-16-BLU</b> <b>LENS-16-AMB</b>	Colored Lens Colored Lens Colored Lens Colored Lens	Red Green Blue Amber
	<b>LENS-16-FR</b>	Clear/Frosted Lens	Frosted
	<b>LENS-16-SPR</b>	Spread Lens	Spread Lens
	<b>LENS-16-UVF</b>	UV Filter lens	Clear
	<b>LENS-16-BEL</b>	Beam Elongating Lens	Beam Elongating
	<b>LENS-16-HCL</b>	Honeycomb Louver	Black