



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Palmer LED Vanity PLMV Series

Features

Contemporary style vanity with end caps and smooth white diffuser provided a simple and clean appearance. Fixture can be mounted horizontally or vertically to a standard junction box (not included).

Construction

The wiring channel is formed from 22-gauge steel and is provided with standard mounting holes and hardware. Power supply connections must be made inside a junction box (not included).

Finish

Housing is finished in lighting grade baked gloss white enamel paint. Satin Nickel or Black end caps.

Diffuser

Smooth white acrylic diffuser.

Electrical

Input 120-277 VAC / 60 Hz.
0-10V dimming (120-277V), TRIAC (120V).
Minimum starting temp -4° F / -20°C.

LED

Integrated LED modules capable of producing:
25W = 1900 delivered lumens
30W = 2200 delivered lumens
40W = 3200 delivered lumens
Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
Rated for 50,000 Hrs., 90 CRI.

Certification

All fixtures are cULus listed for indoor damp locations.
ADA Compliant
Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.


Specifications and dimensions
subject to change without notice.



Black



Satin Nickel

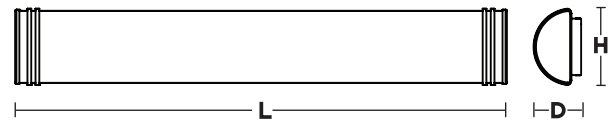

Ordering Information:

Black	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	H	D
PLMV2406LAJUDBK	PLMV2406LAJUDSN	25W	1900	2700K/3000K/3500K/4000K/5000K	24"	5-1/2"	3-1/2"
PLMV3606LAJUDBK	PLMV3606LAJUDSN	30W	2200	2700K/3000K/3500K/4000K/5000K	36"	5-1/2"	3-1/2"
PLMV4806LAJUDBK	PLMV4806LAJUDSN	40W	3200	2700K/3000K/3500K/4000K/5000K	48"	5-1/2"	3-1/2"