

Stellar Nebula 30 suspension

SPECIFICATIONS

0152028A



Design By

BJARKE INGELS GROUP

Collection


Design



Specifications

Delivered lumens	1890lm
Light output ratio	95lm/W
Power consumption	20W
Led type	17W C.O.B.*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	50000Hrs
Control type	Dimmable 0-10V / Dimmable 2-Wire**
Input Voltage	120-277V
Driver	EFORE - 1 x RCL030-0500A

Colors & Finishes

 Dichroic gradient (diffuser)

 Polished Aluminum (canopy)

Materials


- Aluminum canopy
- Blown glass diffuser
- Dichroic finishes made with an innovative and sustainable metal vacuum deposition process

*Integrated light source **2-wire dimming at 120VAC only

Features & Accessories

- Integrated driver dual-mode dimming, 2-wire and 0-10V dimming options

Dimensions

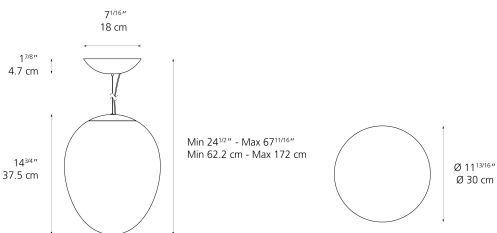

Packaging

1 Box


1 x 20-3/16" x 20-3/16" x 20-9/16" / 11.46 lbs - 51 cm x 51 cm x 52 cm / 5.2 kg

Light distribution

Diffused

Luminaire weight

6.61 lbs / 3 kg



Warranty

5 year limited warranty

Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane