

## BLAZE 6" Round

### Remodel Downlight

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R6DRDR	F 55°	9CS 2700K/3000K/3500K /4000K/5000K - 90	2130	2292	WT White

Example: **R6DRDR-F9CS-WT**

#### DESCRIPTION

Minimum profile downlight with metal conduit and driver included for easy remodel or new construction installation.

#### FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Sold as remodel, but new construction frame available
- Metal Conduit with Quick Connect to allow for easy installation
- Driver included
- 5 year warranty

#### SPECIFICATIONS

Construction:	Die-cast Aluminum with 20-gauge Cold Rolled Steel Driver Box
Power:	25W
Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Frosted TIR lens
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Cut Out:	5 1/2"
Finish:	Electrostatically Powder Coated: White
Ceiling Thickness:	1/2" - 1 1/2"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant, IC, Airtight




#### FINISHES:



White

#### LINE DRAWING:

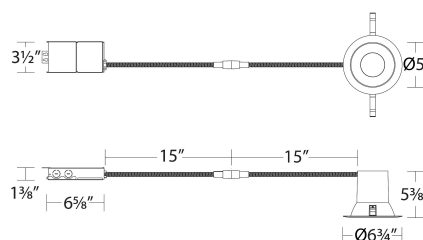

# WAC LIGHTING

## BLAZE 6" Round Remodel Downlight

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

---

### ACCESSORIES

---

<i>Model</i>	<i>Description</i>	<i>Finish</i>
--------------	--------------------	---------------