




36", dark stained walnut, gloss white

The Plura is a simple, straight forward fixture that is excellently executed. With the Plura it was about resolving the seams and edges and their relationships to one another. The result is a scalable fixture that has a sharp, sophisticated feel.

Nick Sheridan, Designer




**Plura 18 & 24:**  
textured white (CM-060)  
low-profile round canopy  
with white SVT

**Plura 30 GU-24  
Base Sockets:**  
textured white (CM-060)  
low-profile round canopy,  
clear SPT with steel cable


**Plura 30 Integrated LED:**  
textured white (CM-060)  
extended round canopy,  
clear SPT with steel cable

**Plura 36 & 46:**  
textured white (CM-060)  
8" round canopy, clear SPT  
with steel cable

See website for more canopy information.

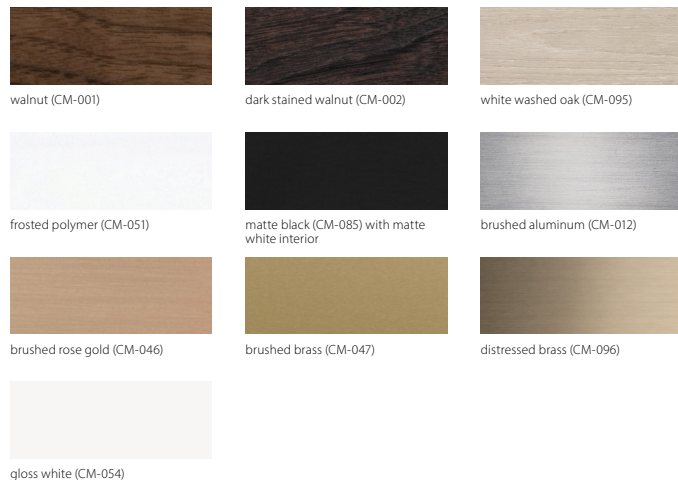

## Plura pendant

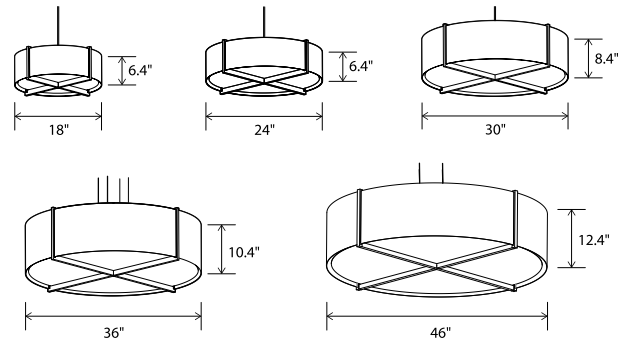

### Dimensions:

- Plura 18: 18" Ø, 6.4"
- Plura 24: 24" Ø, 6.4"
- Plura 30: 30" Ø, 8.4"
- Plura 36: 36" Ø, 10.4"
- Plura 46: 46" Ø, 12.4"

**Materials:** solid wood, polymer

### Product weight:

- Plura 18: 5 lb
- Plura 24: 6 lb
- Plura 30: 9 lb
- Plura 36: 13 lb
- Plura 46: 20 lb

### Integrated LED Specifications

#### Light output:

- Plura 18 & 24: 1690 Lumens (source)
  - Plura 30, 36, & 46: 2815 Lumens (source)
- Light color:** 2700 K, 3000 K, 3500 K, or 4000 K

**Color accuracy:** 90+ CRI

#### Power usage:

- Plura 18 & 24: 19.5 W
  - Plura 30, 36, & 46: 32.5 W
- Dimmable (see driver below)  
Plura 18 & 24 driver location: must be housed in J-box

**Driver dimensions:** 3.3" x 1.6" x 1", included

Plura 30, 36, & 46 driver location: housed in canopy

### GU-24 Base Specifications

#### Light source:

- Plura 18 & 24: 2x GU-24 base socket
- Plura 30, 36, & 46: 4x GU-24 base socket

#### Lamping:

- Plura 18 & 24: 2x GU-24 base self-ballasted bulbs, 18 W max each
  - Plura 30, 36, & 46: 4x GU-24 base self-ballasted bulbs, 18 W max each
- Bulbs not included  
Input voltage: 300 V AC max

See at left for canopy information  
96" drop length, field adjustable  
Suitable for a sloped ceiling  
Wood grain will vary  
Specifications subject to change




### MATERIAL & FINISH OPTIONS

Plura pendant part # 06-230-

<b>Size</b>		
18" Ø	<b>18</b>	
24" Ø	<b>24</b>	
30" Ø	<b>30</b>	
36" Ø	<b>36</b>	
46" Ø	<b>46</b>	
<b>Wood Body</b>		
walnut (CM-001)	<b>W</b>	
dark stained walnut (CM-002)	<b>D</b>	
white washed oak (CM-095)	<b>O</b>	
<b>Shade Material</b>		
frosted polymer (CM-051)	<b>F</b>	
matte black (CM-085) with matte white interior	<b>B</b>	
brushed aluminum (CM-012)	<b>A</b>	
brushed rose gold (CM-046)	<b>G</b>	
brushed brass (CM-047)	<b>R</b>	
distressed brass (CM-096)	<b>D</b>	
gloss white (CM-054)	<b>W</b>	
<b>Lamping</b>		
2700 K LED	<b>27</b>	
3000 K LED	<b>30</b>	
3500 K LED	<b>35</b>	
4000 K LED	<b>40</b>	
GU-24 base sockets	<b>GU</b>	
<b>Driver (LED version only)</b>		
AC Input Voltage Range: 120-277 V		
120 V input: TRIAC, ELV & 0-10 V dimmable	<b>P1</b>	
240 & 277 V input: only 0-10 V dimmable		

Includes: frosted polymer (CM-051)

Also available in a flush mount version

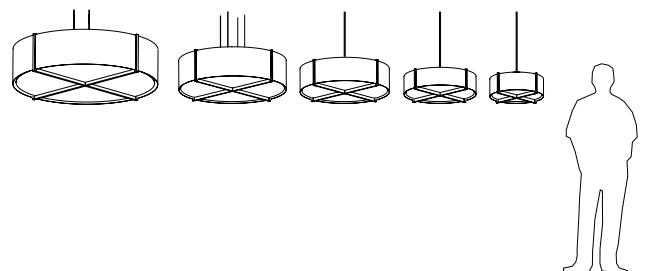

▲WARNING: California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)