

INSTALLATION INSTRUCTION  
**InvisiLED® Outdoor Slave Controller**  
LED-TO24-CS

WAC LIGHTING  
Responsible Lighting®


**KEY SPECIFICATIONS:**

Overall dimensions: 4 3/4" x 2 3/4" x 1 3/4" (121mm x 71mm x 42mm)  
Min/max run length: Up to 40ft of INVISILED® Palette 24V Outdoor using a 24V 96W DC power supply.  
Power Supply: 24V DC power supply, Class II  
Current: 4.2A Maximum  
IP rated: 67

**Application:** Intended for outdoor use. The recommended ambient environment temperature is -4°F to 122°F. This outdoor system provides flexible, easy-to-install accent lighting solutions for a broad range of applications. Versatile and adaptable, this system is ideal for numerous outdoor applications such as decks, steps, ponds, fountains, pools, architectural accents, and landscapes.

This product is designed for INVISILED® Palette 24V Outdoor tape light series and is compatible with WAC LED-TO24-CM.

**PRODUCT APPEARANCE**

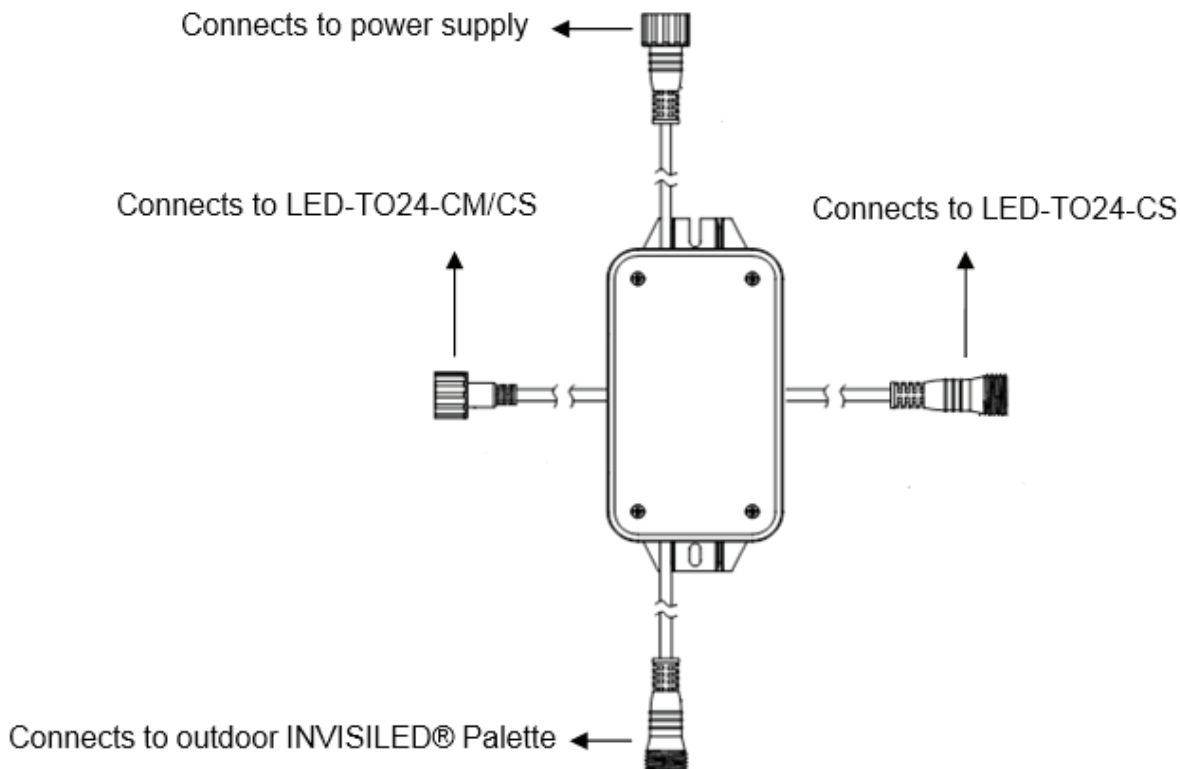

WAC Lighting  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050


Western Distribution Center  
1750 Archibald Ave • Ontario, CA 91761  
Phone (800) 526.2588 • Fax (800) 526.2585

**INSTALLATION INSTRUCTION**  
**InvisiLED® Outdoor Slave Controller**  
 LED-TO24-CS

**WAC LIGHTING**  
 Responsible Lighting®


**SAMPLE LAYOUT**

A EN-O24100-RB2-T	Remote power supply
B LED-TO24-IC6	Joiner cable
C LED-TO24-CM	Master controller
D LED-TO24-CS	Slave controller
E LED-TO24-SW60	Palette signal wire
F LED-TO24-IC72-RGB	RGB Joiner cable
G LED-TO24-WS	Palette wireless controller
H LED-TCO-1-RGB	1 foot Palette tape section
I LED-TO24-X-RGB	Palette X connector
J LED-TCO-10-RGB	10 foot Palette tape section
K LED-TO24-EC	End cap
L LED-TO24-Y-RGB	Palette Y connector
M LED-TCO-5-RGB	5 foot Palette tape section

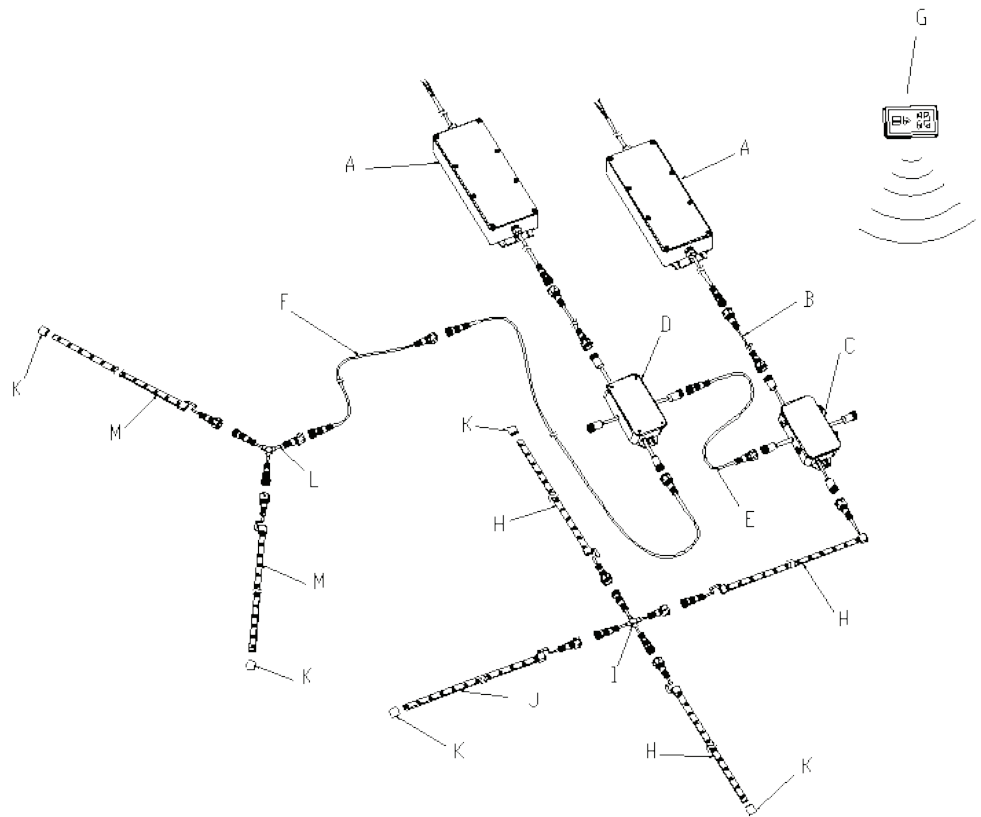

**FUNCTION**

The slave controllers connect to, and are controlled by, the master controller. Connect the slave controllers to the master controller as follows:

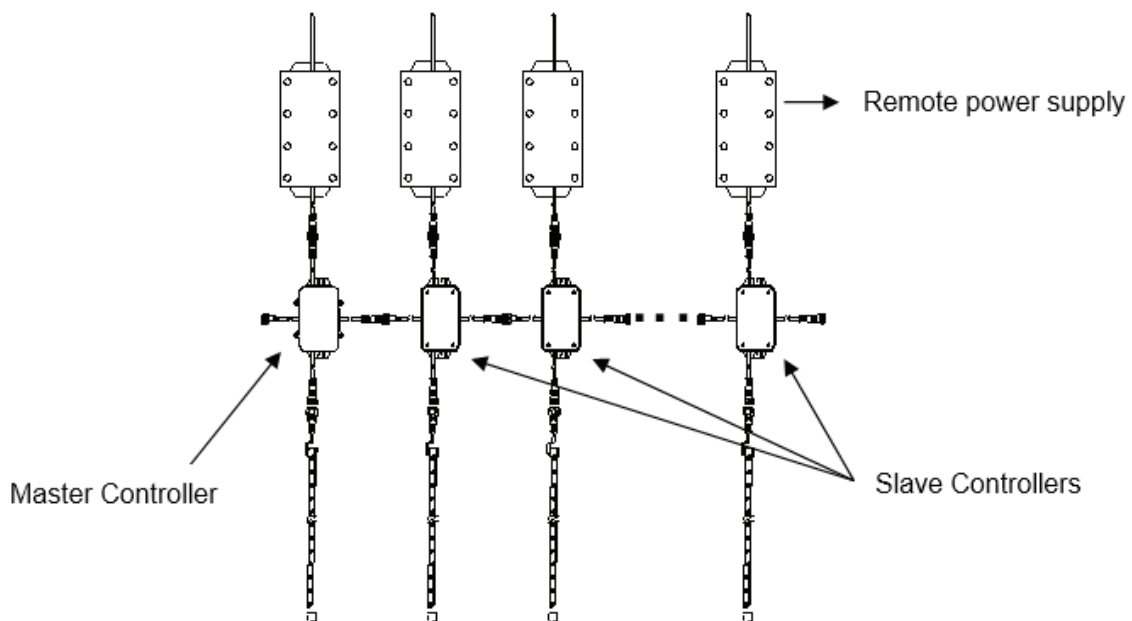

**WAC Lighting**  
 www.waclighting.com  
 Phone (800) 526.2588 • Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
 44 Harbor Park Drive • Port Washington, NY 11050  
 Phone (516) 515.5000 • Fax (516) 515.5050

**Western Distribution Center**  
 1750 Archibald Ave • Ontario, CA 91761  
 Phone (800) 526.2588 • Fax (800) 526.2585