



**MODEL NAME** **LNR24-CC-V**  
**BOULEVARD**

**24" Architectural Recessed Light**

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

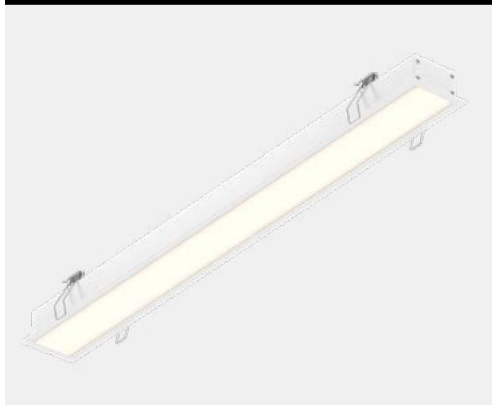

|                 |              |
|-----------------|--------------|
| <b>PROJECT:</b> | <b>TYPE:</b> |
| <b>DATE:</b>    | <b>QTY:</b>  |
| <b>NOTES:</b>   |              |

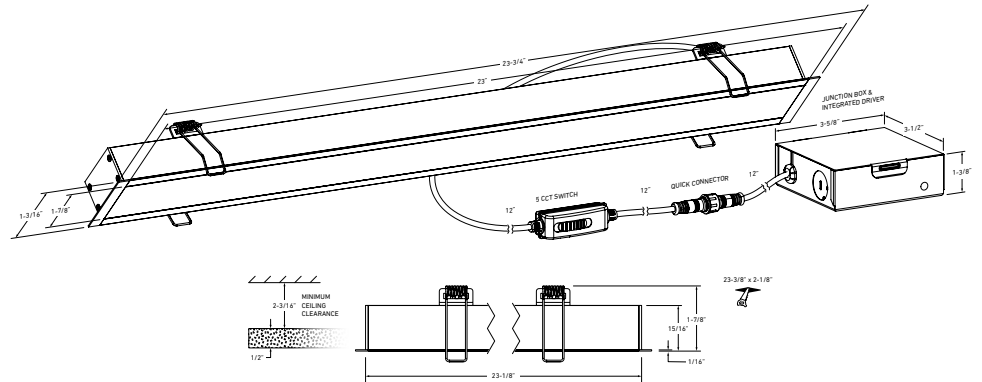


**QUICK SPECS**

| SIZE | WATTS | DELIVERED LUMENS* | COLOR °T 5CCT | CRI | VOLTAGE | BEAM ANGLE | FINISH  |
|------|-------|-------------------|---------------|-----|---------|------------|---------|
| 24"  | 20W   | 1725lm            | 2700K         | 90  | 120V    | 108°       | ○ White |
|      |       |                   | 3000K         |     |         |            |         |
|      |       |                   | 3500K         |     |         |            |         |
|      |       |                   | 4000K         |     |         |            |         |
|      |       |                   | 5000K         |     |         |            |         |

\*Lumen output measured at 3000K

**LIGHT DISTRIBUTION**

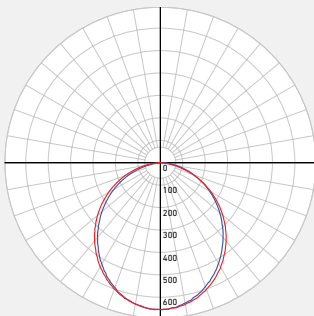

|                     |                            |   |  |
|---------------------|----------------------------|---|--|
| <b>CONSTRUCTION</b> | <b>Lens</b><br>Frosted     | <b>Type of optics</b><br>Flat lens            | <b>Type of LED</b><br>SMD                |
|                     | <b>Lens material</b><br>PC | <b>Housing material</b><br>Aluminum extrusion | <b>Cut hole size</b><br>23-3/8" x 2-1/8" |

|                |                                     |  |   |
|----------------|-------------------------------------|--|---|
| <b>RATINGS</b> | <b>Placement*</b><br>Indoor/Outdoor | <b>Lifespan</b><br>50,000 hrs.   | <b>FT rating</b><br>FT6                       |
|                | <b>Location*</b><br>Wet             | <b>Certifications</b><br>ETL, FCC, ICES, ES, IC, ASTM E283-04, T20 T24 | <b>Operating temperature</b><br>-20° to 40° C |

\*Covered ceiling mount only.

**WHAT'S IN THE BOX**

- LED recessed fixture
- Junction box
- Push-in wire connectors
- Mounting hardware
- Instruction sheet

**ACCESSORIES**

- [RFP-LNR24](#)  
Drilling Plate
- [LNACC-L16FT](#)  
16-foot lens for Boulevard series pendants and recessed linears

**ADAPTERS**

- [REC-EXT108](#)  
108" extension cord for recessed fixtures
- [REC-EXT230](#)  
230" extension cord for recessed fixtures



**ELECTRICAL  
DETAILS**

**Input voltage**  
120-347V

**Output current**  
470mA

**Power factor**  
90%

**Driver type**  
Constant current

**Output voltage**  
40-44V

**LED model #**  
2835

**THD harmonic  
distortion**  
<30%

**Binning type**  
3 SDCM

**FEATURES**

Every fixture includes  
a junction box with an  
integrated driver

Superior LED  
performance and  
lifespan

Frosted lens  
Back-lit technology

Switch-selectable CCT:  
2700K/ 3000 K/ 3500 K/  
4000 K/ 5000 K

Can be daisy chained

Minimal heat emission

0-10V dimming

**WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).

**RECOMMENDED DIMMER LIST\***

| BRAND  | MODEL #                 | DIMMER SPECS   | GRADE      | DIMMING RANGE (%) |     | MAX LOAD |
|--------|-------------------------|--|------------|-------------------|-----|----------|
|        |                         |  |            | MIN               | MAX |          |
| Lutron | DVSTV (0-10 V Controls) | 960W, Operating Voltage:120-277 V~, Load Switching Capacity: 8 A | Compatible | 5                 | 90  | 48       |

\* Minimal buzzing noise may occur with some dimmers