
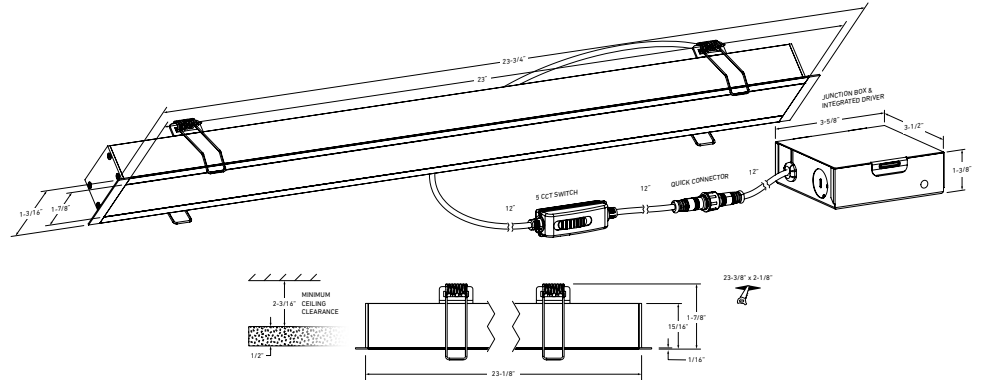


**MODEL NAME** **LNR24-CC**  
**BOULEVARD**

**24" Architectural Recessed Light**

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

<b>PROJECT:</b>	<b>TYPE:</b>
<b>DATE:</b>	<b>QTY:</b>
<b>NOTES:</b>	

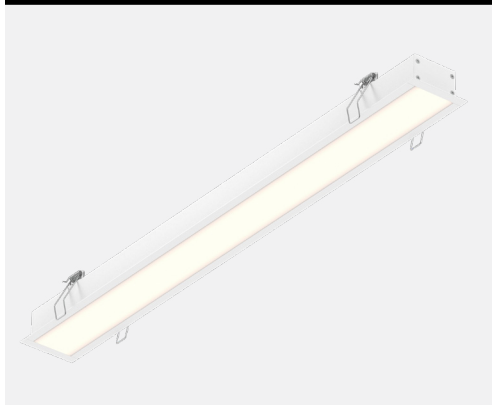


**QUICK SPECS**

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
24"	20W	1725lm	2700K 3000K 3500K 4000K 5000K	90	120V	108°	<input type="radio"/> White <input checked="" type="radio"/> Black

\*Lumen output measured at 3000K

**LIGHT DISTRIBUTION**



**CONSTRUCTION**

<b>Lens</b> Frosted	<b>Type of optics</b> Flat lens	<b>Type of LED</b> SMD
<b>Lens material</b> PC	<b>Housing material</b> Aluminum extrusion	<b>Cut hole size</b> 23-3/8" x 2-1/8"

**RATINGS**

<b>Placement</b> Indoor	<b>Lifespan</b> 50,000 hrs.	<b>FT rating</b> FT6
<b>Location</b> Dry	<b>Certifications</b> ETL, FCC, ICES, ES, IC, ASTM E283-04, T20 T24	<b>Operating temperature</b> -20° to 40° C

**WHAT'S IN THE BOX**

- LED recessed fixture
- Junction box
- Push-in wire connectors
- Mounting hardware
- Instruction sheet

**ACCESSORIES**

- [RFP-LNR24](#)  
Drilling Plate
- [LNACC-L16FT](#)  
16-foot lens for Boulevard series pendants and recessed linears

**ADAPTERS**

- [REC-EXT108](#)  
108" extension cord for recessed fixtures
- [REC-EXT230](#)  
230" extension cord for recessed fixtures



## ELECTRICAL DETAILS

**Input voltage**  
108-132V

**Output current**  
470mA

**Power factor**  
90%

**Driver type**  
Constant current

**Output voltage**  
40-44V

**LED model #**  
2835

**THD harmonic distortion**  
<30%

**Binning type**  
3 SDCM

## FEATURES

Every fixture includes a junction box with an integrated driver

Superior LED performance and lifespan

Frosted lens  
Back-lit technology

Switch-selectable CCT:  
2700K/ 3000 K/ 3500 K/  
4000 K/ 5000 K

Can be daisy chained

Minimal heat emission

## WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).

## RECOMMENDED DIMMER LIST\*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	5	100	15
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	1	100	13
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	1	100	6

\* Minimal buzzing noise may occur with some dimmers