



MODEL NAME **LNR24-CC BOULEVARD**

24" Architectural Recessed Light

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

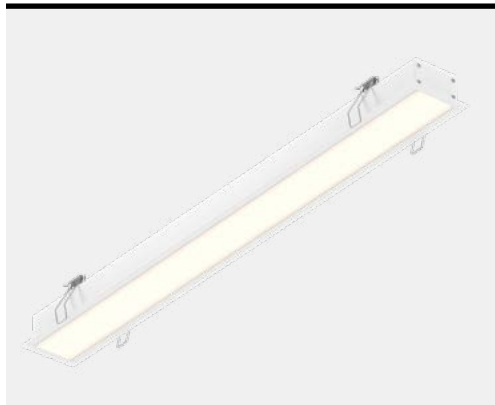

PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

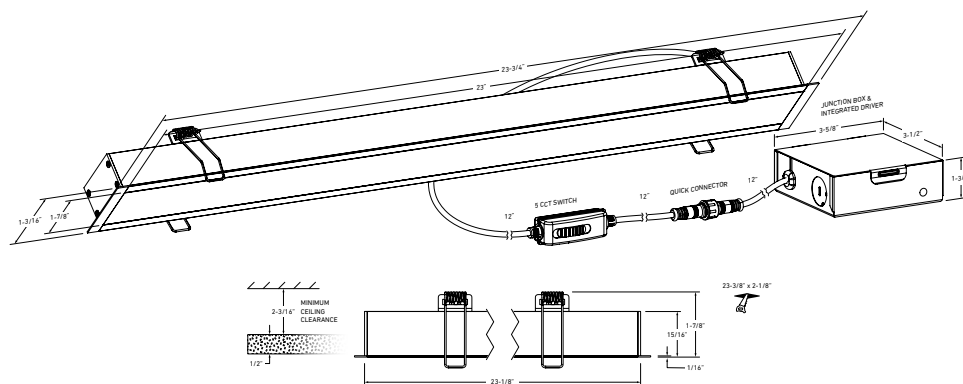


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
24"	20W	1725lm	2700K 3000K 3500K 4000K 5000K	90	120V	108°	○ White

*Lumen output measured at 3000K

LIGHT DISTRIBUTION



CONSTRUCTION	Lens Frosted	Type of optics Flat lens	Type of LED SMD
	Lens material PC	Housing material Aluminum extrusion	Cut hole size 23-3/8" x 2-1/8"

RATINGS	Placement* Indoor/Outdoor	Lifespan 50,000 hrs.	FT rating FT6
	Location* Wet	Certifications ETL, FCC, ICES, ES, IC, ASTM E283-04, T20 T24	Operating temperature -20° to 40° C

*Covered ceiling mount only.

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- Push-in wire connectors
- Mounting hardware
- Instruction sheet

ACCESSORIES

- [RFP-LNR24](#)
Drilling Plate
- [LNACC-L16FT](#)
16-foot lens for Boulevard series pendants and recessed linears

ADAPTERS

- [REC-EXT108](#)
108" extension cord for recessed fixtures
- [REC-EXT230](#)
230" extension cord for recessed fixtures



**ELECTRICAL
DETAILS**

Input voltage
108-132V

Output current
470mA

Power factor
90%

Driver type
Constant current

Output voltage
40-44V

LED model #
2835

**THD harmonic
distortion**
<30%

Binning type
3 SDCM

FEATURES

Every fixture includes
a junction box with an
integrated driver

Superior LED
performance and
lifespan

Frosted lens
Back-lit technology

Switch-selectable CCT:
2700K/ 3000 K/ 3500 K/
4000 K/ 5000 K

Can be daisy chained

Minimal heat emission

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	5	100	15
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	1	100	13
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	1	100	6

* Minimal buzzing noise may occur with some dimmers