

Beam

This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SPD48-3K	48"	32 W	1810 lm	2800 lm	90	3000 K	120 V - 277 V
SPD72-3K	72"	55 W	2800 lm	4500 lm	90	3000 K	120 V - 277 V

Specifications

Over 50,000 hours of service life
Adjustable cable length up to 10 feet
Warm white light output
Frosted lens
Up/down light (20% up, 80% down)
Aluminum die-cast housing which serves as a highly efficient heat sink
Low power consumption
Superior color consistency
Integrated dimmable driver
Compatible with TRIAC, ELV and 0-10 V dimmers
Suitable for dry locations
Refer to website for dimmer compatibility
5-year warranty

Finish

- **BK** Black
- **WH** White


Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.

Order example

SPD72-3K-WH
Dimmable SPD72-3K 72" slim pendant in a white finish

SPD48-3K

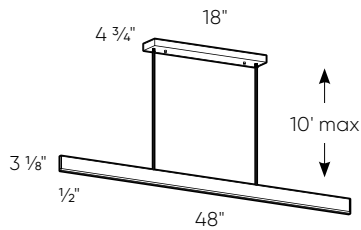

SPD72-3K

