

Column

The Column series, a robust rectangular bollard that features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, it provides a chic solution to eco-conscious homeowners.

2200k 2700k 3000k 3500k 4000k
COLOR TEMPERATURE

WET

ETL Intertek



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LRB20-CC	20"	12 W	600 lm	80	2200, 2700, 3000,	12 VAC
LRB30-CC	30"	13 W	700 lm		3500, 4000 K	

Specifications

Over 50,000 hours of service life
 12VAC input
 Ground stake included
 109° beam angle
 Frosted lens
 Can be mounted to wood or concrete (screws not included)
 Cast aluminum construction
 Switch-selectable CCT: 2200 K/2700 K/3000 K/3500 K/4000 K
 Suitable for wet locations
 5-year warranty

Note

Low-voltage transformer required.
 Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.

Finish

● **BK** Black

Power supplies

LTRP-60-BK
 60W, 120VAC 60Hz input
 12VAC output low-voltage transformer

LTR-300-BK
 300W, 120VAC 60Hz input
 12/13/14/15VAC output low-voltage transformer

Accessories

LCBL-50-16
 50 feet of 16 gauge low-voltage wiring

LCBL-100-16
 100 feet of 16 gauge low-voltage wiring


LCBL-50-14
 50 feet of 14 gauge low-voltage wiring

LCBL-100-14
 100 feet of 14 gauge low-voltage wiring

LCBL-100-12
 100 feet of 12 gauge low-voltage wiring

LCBL-200-12
 200 feet of 12 gauge low-voltage wiring

LRB20-CC

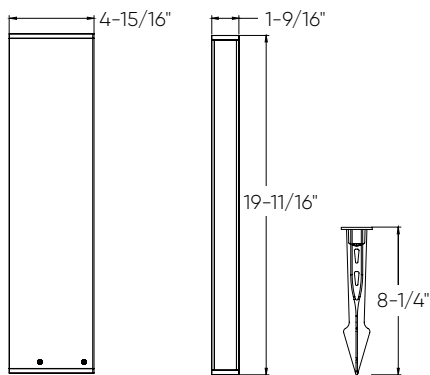

LRB30-CC

