

# **DALS** LIGHTING

NOTES:

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com

MODEL NAME


## DDP6-CC


### **ETCH**

### 6-Inch Regressed Panel Light

The Etch range of circular recessed downlights, characterised by a deepset LED position, provides a functional solution to general lighting without the uncomfortable glare.






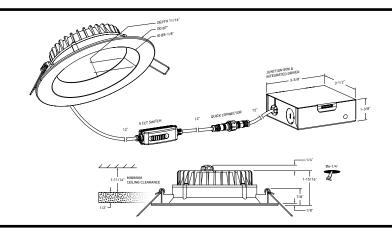

### QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
6"	20W	1500lm	2700K 3000K 3500K 4000K	90	120V	125°	White
*Lumen outp	ut measured at 3000K		5000K				



CONSTRUCTION	<b>Lens</b> Frosted	Type of optics Flat lens	<b>Type of LED</b> Back-lit SMD	
	<b>Lens material</b> Acrylic	<b>Housing material</b> Cast aluminum	Cut hole size 6-1/2"	
RATINGS	Placement Indoor/Outdoor	<b>Lifespan</b> 50,000 hrs.	FT rating FT6	

### WHAT'S IN THE BOX

LED recessed fixture Junction box Push-in wire connectors Mounting hardware Instruction sheet

### ACCESSORIES

## RFP-UNI

Universal Drilling Plate

### RFP-46

**Drilling Plate** 

### DDP6-TRIM-BK

Panel Trim in Black

### **ADAPTERS**

### **REC-EXT108**

108" extension cord for recessed fixtures

### REC-EXT230

230" extension cord for recessed fixtures



Canada

80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A.

4383, NW 124th Ave., Coral Springs, Florida 33065

877.430.1818 info@dals.com dals.com

**ELECTRICAL DETAILS** 

Input voltage 108-135V

**Output current** 530mA

**Power factor** 

**Driver type** Constant current

**Output voltage** 

30-42V

LED model # 3030

**THD** harmonic distortion <30%

**Binning type** 3 SDCM

**FEATURES** 

Every fixture includes a junction box with an integrated driver

Superior LED performance and lifespan

Frosted lens

Switch-selectable CCT: 2700K/ 3000 K/ 3500 K/

Can be daisy chained

Smooth 360° wide spread

Back-lit technology

Minimal heat emission

4000 K/ 5000 K

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*					
BRAND	MODEL#	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	Min: 1 / Max: 72	15
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 1 / Max: 92	12
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 1 / Max: 94	12
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 0 / Max: 94	6

<sup>\*</sup> Minimal buzzing noise may occur with some dimmers