


Pivot Duo

With an infinite choice of beam direction, Pivot Duo provides a discrete yet functional solution to general or accent lighting within your space.

NEW WET SWIVEL/DIRECTIONAL 90° ETL IC ENERGY STAR JA8

2700k 3000k 3500k 4000k 5000k
COLOR TEMPERATURE

Intertek RATED
ENERGY STAR CERTIFIED

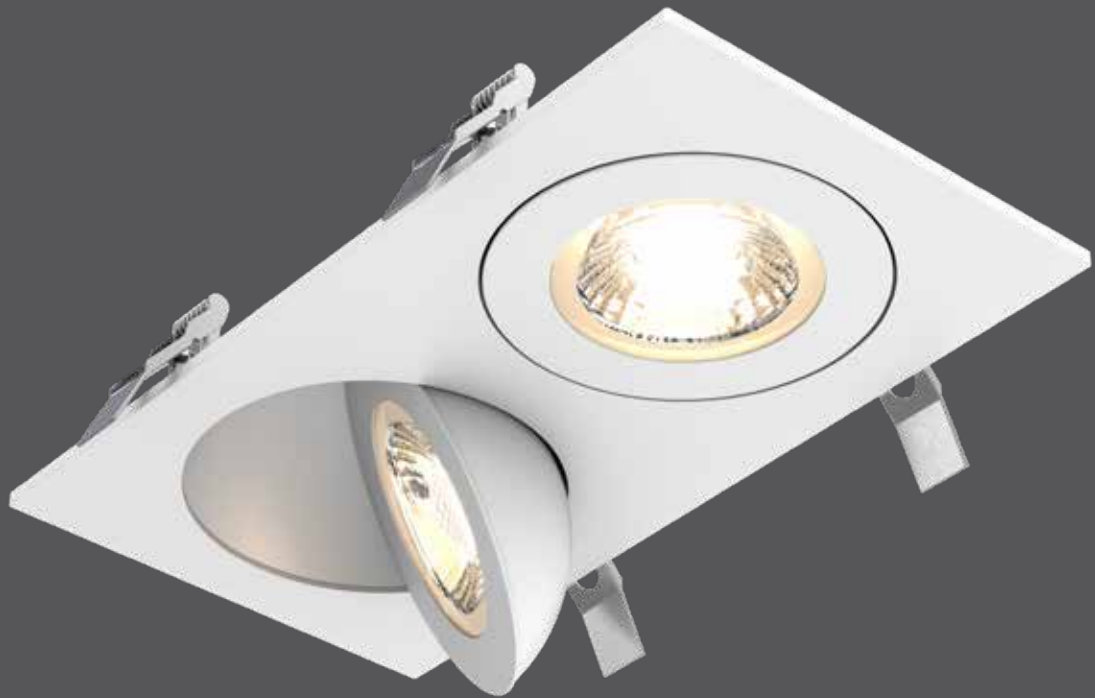

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
FGM4-CC-DUO	4"	18 W	1475 lm	1620 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V

Specifications

Includes a junction box with integrated dimmable driver
 Can be daisy chained
 Superior LED performance and lifespan
 90° tilting, 360° rotation
 Minimal heat emission
 Aluminum construction
 Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K
 Low profile
 40° beam spread
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Suitable for wet locations
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

○ **WH** White

Accessories

RFP-DUO
 Rough-in plate

Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

FGM4-CC-DUO 8-5/8" X 4-3/4" 

