
Ultra-slim LED Strip

Our ultra-slim linear can be seamlessly connected together creating a long, break-free light emission.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LINU12	12"	4.3 W	400 lm	500 lm	90	3000 K	12 V
LINU04	4"	1.4 W	130 lm	160 lm	90	3000 K	12 V

Specifications

Over 50,000 hours of service life
 12" (30.5 cm) power cord included
 (model LINU12 only)
 Smooth linear wide spread
 Minimal heat emission
 No UV light emission
 Seamlessly interconnectable
 (No light breaks)
 Multiple fixtures can be linked together
 (Up to 6x LINU12 in series)
 Refer to website for dimmer compatibility
 5-year warranty

Finish

● **SBA** Sandblasted aluminum

Note

Plug-in or hard-wired power supply required for installation. Sold separately.

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.

Power supplies: plug-in

ETR-LED10WPI
 12VDC/10W class 2 LED driver

ETR-LED24WPI
 12VDC/24W class 2 LED driver

Power supplies: hard-wired

BT06DIM-IC
 6W dimmable LED hardwire driver

BT12DIM-IC
 12W dimmable LED hardwire driver

BT24DIM-IC
 24W dimmable LED hardwire driver

BT36DIM
 36W dimmable LED hardwire driver

BT48DIM
 48W dimmable LED hardwire driver

Accessories

LINU04
 4" ultra-slim LED strip

LINU12-ACC-CROSS
 Illuminated cross-shaped connector

LINU12-ACC-L-LEFT
 Illuminated L-shaped connector

LINU12-ACC-L-RIGHT
 Illuminated L-shaped connector

LINU12-ACC-T-LEFT
 Illuminated T-shaped connector

LINU12-ACC-T-MIDDLE
 Illuminated T-shaped connector


LINU12-ACC-T-RIGHT
 Illuminated T-shaped connector

LINU12-EXT24
 24" extension cord

LINU12-EXT108
 108" extension cord

Order example

LINU12
 12" undercabinet linear with 400 lumens at 3000K in a sandblasted aluminum finish

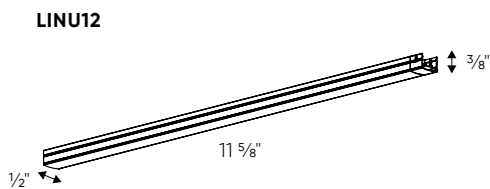

LINU04

