


Flexa™ 4" Square Reflector for Koto™ Module

Mix and match any ring finish with any reflector or baffle finish

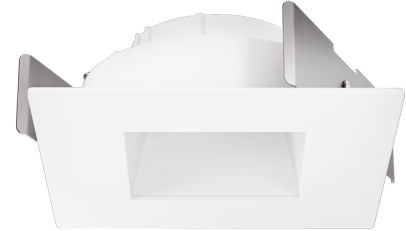

Features

- 2 Piece Flexa™ trims for maximum design flexibility.
- Convenient twist-lock design for ease of installation.
- Diecast construction for lasting quality.
- 4 3/4" O.D. - 2 3/8" I.D. - 1 1/8" H.
- **Square trim recommended for New Construction Housings only**
- Wet location rated.

Specifications

Wet Location UL Listed

Options



All White



All Black



All Bronze



Black Reflector w/ White Trim



Chrome Reflector w/ White Trim



Haze Reflector w/ White Trim


Technical Details

Construction: Diecast aluminum with a powder coated finish.

Installation: Twist-lock design allows for easy mounting onto the Koto™ LED Module. Clips securely mount trim into the housing and keeps ring flush with ceiling.

Lamp: Koto™ LED Module.

Dimensions:

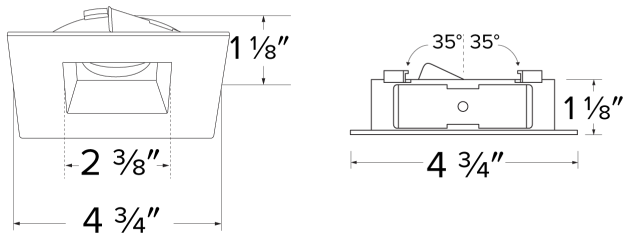

Product Numbers

| Item | Finish |
|-------------|------------------------|
| ELK4741WW | All White |
| ELK4741BB | All Black |
| ELK4741BZBZ | All Bronze |
| ELK4741BW | Black with White Trim |
| ELK4741CW | Chrome with White Trim |
| ELK4741HW | Haze with White Trim |

Product Number Builder

Example: **ELK4741WW**

4 Koto™ Flexa Trim

Style

Style Finish

Ring Finish

ELK474

1 Reflector


- W** All White
- B** All Black
- BZ** All Bronze
- C** All Chrome
- H** All Haze

- W** All White
- B** All Black
- BZ** All Bronze

Compatible Products

For use with 4" Koto™ Twist-On Trims

Koto™ LED Module



Koto™ LED Module
ELK07, ELK09, & ELK11

PRODUCT NUMBER BUILDER

| Koto™ LED Module | Lumens | Color Temperature | Beam Angle |
|------------------|---------|---------------------------------------|---------------------------------------|
| ELK | | | |
| 07 | 750 lm | 27 2700K | (blank) 38° lens (Standard) |
| 09 | 950 lm | 30 3000K | -S 18° lens |
| 11 | 1150 lm | 35 3500K | -N 25° lens |
| | | 40 4000K | -W 60° lens |
| | | SD Sunset Dimming (For ELK09 & ELK11) | -FC 18° - 50° Adjustable (ELK07 Only) |

ACCESSORIES



Lens

| | |
|--------|----------|
| EP731C | 18° Lens |
| EP732C | 25° Lens |
| EP733C | 38° Lens |
| EP734C | 60° Lens |

EP732C, EP733C, EP734C
Included with standard module



Snoot

| | |
|------|-------|
| L50W | White |
| L50B | Black |




Secondary Optics

| | | | |
|-----|---------------|-----|------------------|
| L45 | Hex Louver | L57 | White Hex Louver |
| L46 | Linear Lens | L52 | Blue Lens |
| L47 | Spread Louver | L53 | Pink Shifter |
| L49 | Frosted Lens | | |
| L51 | Color Shifter | | |

Koto™ LED Module with 5-CCT Switch

Product Number
ELK08CT5

4" Koto™ Dedicated LED ICA Housings




4" ICA Maximum Adjustability Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|----------|-----------------------|
| EL485ICA | Maximum Adjustability |



4" ICA Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|--------------|--|
| EL490ICA | |
| EL490ICA-EM5 | Emergency Battery Back-up (90 minutes) |



2-Hour Fire Rated 4" ICA Housing
New Construction


| CAT NO. | SPECIFICATIONS |
|----------|-----------------------------|
| EL48FICA | 7 1/2" Height - Sound Rated |

Compatible Products



For use with 4" Koto™ Twist-On Trims

Koto™ Architectural LED Light Engine




Koto™ LED Light Engine
ELK19 - ELK21

| PRODUCT NUMBER BUILDER | | | |
|------------------------|----------------|--------------------------------|-----------------------------|
| Koto™ LED Light Engine | Lumens | Color Temperature | Beam Angle |
| ELK | | | |
| 19 | 750 - 850 lm | 27D 2700K | (blank) 38° lens (Standard) |
| 21 | 1100 - 1500 lm | 30D 3000K | -S 18° lens |
| | | 35D 3500K | -N 25° lens |
| | | 40D 4000K | -W 60° lens |
| | | SD Sunset Dimming (ELK19 Only) | |

ACCESSORIES


| | |
|--|----------------------|
| | |
| Lens | Snoot |
| EP731C 18° Lens | L50W White |
| EP732C 25° Lens | L50B Black |
| EP733C 38° Lens | |
| EP734C 60° Lens | |
| <small>*EP732C, EP733C, EP734C Included with standard module</small> | |
| | |
| Secondary Optics | |
| L45 Hex Louver | L57 White Hex Louver |
| L46 Linear Lens | L52 Blue Lens |
| L47 Spread Louver | L53 Pink Shifter |
| L49 Frosted Lens | |
| L51 Color Shifter | |

4" Koto™ Architectural Recessed Housings



4" High Lumen Maximum Adjustability ICA Housing
1500 lm (18.9W) w/ELK21 Series Module
Not for use with ELK19 Series Module
New Construction

| CAT NO. | SPECIFICATIONS |
|------------|----------------------------|
| E4LK79ICAD | 120/277V - 0-10V/Triac/ELV |



4" Shallow Maximum Adjustability ICA Housing
850 lm (14.7W) w/ELK19 Series Module
1100 lm (14.7W) w/ELK21 Series Module
New Construction

| CAT NO. | SPECIFICATIONS |
|------------|----------------------------|
| E4LK98ICA | 120V - Triac/ELV |
| E4LK99ICAD | 120/277V - 0-10V/Triac/ELV |



4" Standard ICA Housing
750 lm (11.8W) w/ELK19 Series Module
950 lm (11.8W) w/ELK21 Series Module
New Construction

| CAT NO. | SPECIFICATIONS |
|----------------|----------------------------|
| E4LK87ICA | 120V - Triac/ELV |
| E4LK87ICA-EM1 | Emergency Battery Back-Up |
| E4LK88ICAD | 120/277V - 0-10V/Triac/ELV |
| E4LK88ICAD-EM1 | Emergency Battery Back-Up |



2-Hour Fire Rated 4" ICA Housing
750 lm (11.8W) w/ELK19 Series Module
950 lm (11.8W) w/ELK21 Series Module
New Construction

| CAT NO. | SPECIFICATIONS |
|-------------|----------------------------|
| ELK93FICA | 120V - Triac/ELV |
| ELK94TFICAD | 120/277V - 0-10V/Triac/ELV |

Compatible Products



For use with 4" Koto™ Twist-On Trims

Koto™ 24V DC LED Light Engine



24V DC Koto™ LED Light Engine

| PRODUCT NUMBER BUILDER | | | |
|------------------------|--------|-------------------|---------|
| Koto™ LED Light Engine | Lumens | Color Temperature | Voltage |
| ELK | | | |

08 800 lm 27 2700K -24 24V DC
30 3000K

**Standard module includes 38° installed with 25° & 60° field changeable lenses.*

ACCESSORIES



Lens

Snoot

| | |
|------------------------|-------------------|
| EP731C 18° Lens | L50W White |
| EP732C 25° Lens | L50B Black |
| EP733C 38° Lens | |
| EP734C 60° Lens | |


**EP732C, EP733C, EP734C Included with standard module*



Secondary Optics

| | |
|--------------------------|-----------------------------|
| L45 Hex Louver | L57 White Hex Louver |
| L46 Linear Lens | L52 Blue Lens |
| L47 Spread Louver | L53 Pink Shifter |
| L49 Frosted Lens | |
| L51 Color Shifter | |


4" Koto™ Dedicated LED ICA Housings (24V DC Input)



24V DC 4" ICA Maximum Adjustability Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|------------|-----------------------|
| E24V485ICA | Maximum Adjustability |


**Requires 24V DC Transformer*



24V DC 4" ICA Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|------------|----------------|
| E24V490ICA | |

**Requires 24V DC Transformer*



24V DC 4" R-60 Spray Foam Insulation
New Construction Housing

| CAT NO. | SPECIFICATIONS |
|--------------|--|
| E24V490AJICA | Maximum Adjustability, For use in R60 or Chicago plenum applications |

**Requires 24V DC Transformer*



24V DC 2-Hour Fire Rated 4" ICA Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|------------|------------------------------|
| E24V48FICA | 7 1/2" Height Sound Rated |

**Requires 24V DC Transformer*