

1 Toject.
Location:
Fixture Type:
Catalog Number:

AVAILABLE FINISHES:



Project:

Elevation

WS-W5216

PRODUCT DESCRIPTION

Elevation takes enlightenment to the next level with an auspicious meditation on form and function. Silk-screened linen on mitered glass creates a super-subtle grid pattern that's enhanced by the aluminum box frame finished in timeless bronze. Inside, powerful LEDs bring long-lasting, energy-efficient light to illuminate your path wherever it leads you. Add a littlebit more of Zen to your everyday life with Elevation.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- White ceramic silk-screened mitered glass
- Downward and indirect illumination

SPECIFICATIONS

Rated Life 54000 Hours

Standards ETL, cETL,Wet Location Listed
Input 120 VAC,50/60Hz

 Dimming
 ELV

 Color Temp
 3000K

 CRI
 90

Construction Aluminum with silk-screened linen on mitered glass

REPLACEMENT PARTS

RPL-GLA-5216-01 - Outer Glass RPL-GLA-5216-02 - Inner Glass


Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W5216 16"	3000K	BZ Bronze	14.8W	1209	212

Example: WS-W5216-BZ

•For 277V special order, add an "F" before the finish: WS-W5216F-BZ

For custom requests please contact customs@modernforms.com



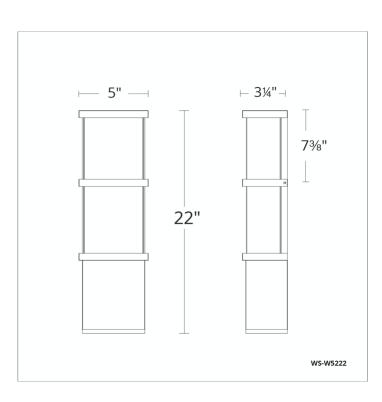

1 Toject.	
Location:	
Fixture Type:	
Catalog Number:	

AVAILABLE FINISHES:



Project:

Elevation

WS-W5222

PRODUCT DESCRIPTION

Elevation takes enlightenment to the next level with an auspicious meditation on form and function. Silk-screened linen on mitered glass creates a super-subtle grid pattern that's enhanced by the aluminum box frame finished in timeless bronze. Inside, powerful LEDs bring long-lasting, energy-efficient light to illuminate your path wherever it leads you. Add a littlebit more of Zen to your everyday life with Elevation.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- White ceramic silk-screened mitered glass
- Downward and indirect illumination

SPECIFICATIONS

Rated Life 54000 Hours

Standards ETL, cETL,Wet Location Listed

Input 120 VAC,50/60Hz

Dimming ELV
Color Temp 3000K
CRI 90

Construction Aluminum with silk-screened linen on mitered glass

REPLACEMENT PARTS

RPL-GLA-5222-01 - Outer Glass RPL-GLA-5222-02 - Inner Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W5222 22"	3000K	BZ Bronze	23.7W	1468	575

Example: WS-W5222-BZ

•For 277V special order, add an "F" before the finish: WS-W5222F-BZ

For custom requests please contact customs@modernforms.com