
moooi

Emperor Suspended

NERI AND HU

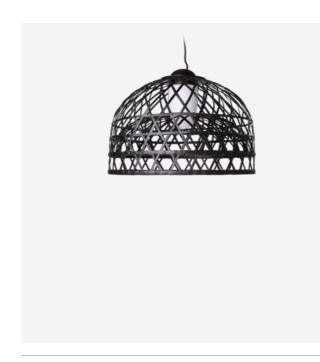

Once upon a time an Asian emperor received as a gift a nightingale. The charming bird sang so beautifully that the emperor always wanted it by his side. He placed the nightingale a majestic hand woven bamboo cage in the imperial chambers and listened, enchanted, to the magic sound...

Detailing



The Emperor features a glass diffuser, that creates a very warm and charming glow of light.

Colours



RAL 9005 Jet black




RAL 3004 Purple red

MOOOI.COM

Emperor Suspended / Large

Dimensions



Product

width 160cm | 63" неіднт 115cm | 45.3" depth 160cm | 63" diameter 160cm | 63" weight netto 18kg | 39.68lbs

Packaging

width 174cm | 68.5"
height 121cm | 47.6"
cubage 3.66m³ | 129.37ft³
length 174cm | 68.5"
weight 33kg | 72.75lbs

Technical CE

MATERIAL

Bamboo rattan cage shade, glass diffuser

	INSTALLATION REQUIRED
A++ to E	Yes
LIGHTSOURCE TYPE	NUMBER OF LIGHTSOURCES
Incandescent	4
SHAPE	INPUT VOLTAGE
Dome	220-240
FREQUENCY	MAX POWER CONSUMPTION
50/60	36W
DIMMABLE	LAMPHOLDER
Yes	2G11
CABLE COLOUR	CABLE LENGTH
Black textile	400cm 157.5"
CANOPY	LIGHT DIRECTION
Pebble II Black, ABS	All directions

Technical cULus

MATERIAL Bamboo rattan cage shade, glass diffuser

ENERGY LABEL

A++ to E

 $\begin{array}{l} \text{INSTALLATION REQUIRED} \\ \text{Yes} \end{array}$

LIGHTSOURCE TYPE

Incandescent

SHAPE

Dome

FREQUENCY 50/60

dimmable Yes

CABLE COLOUR Black textile

сапору Chrome Canopy NUMBER OF LIGHTSOURCES

INPUT VOLTAGE

110-127

 $\begin{array}{l} \text{max power consumption} \\ 36 \text{W} \end{array}$

lampholder 2G11


CABLE LENGTH 400cm | 157.5"; 1000cm | 393.7"

All directions

Emperor Suspended / Medium

Dimensions

100cm | 39.4"



Product

width 100cm | 39.4" Height 73cm | 28.7" Depth 100cm | 39.4" Diameter 100cm | 39.4" Weight Netto 8kg | 17.64lbs

Packaging

width 104.5cm | 41.1" height 82.5cm | 32.5" cubage 0.9m³ | 31.82ft³ length 104.5cm | 41.1" weight 22kg | 48.5lbs

Technical CE

MATERIAL

Bamboo rattan cage shade, glass diffuser

ENERGY LABEL

A++ to E

LIGHTSOURCE TYPE Incandescent

shape Dome

FREQUENCY 50/60

INSTALLATION REQUIRED Yes NUMBER OF LIGHTSOURCES 1 INPUT VOLTAGE 220-240

max power consumption 60W

DIMMABLE

Yes

CABLE COLOUR Black textile

CANOPY Pebble II Black, ABS

Technical cUI us

MATERIAL Bamboo rattan cage shade, glass diffuser

ENERGY LABEL INSTALLATION REQUIRED A++ to E Yes LIGHTSOURCE TYPE Incandescent 1 SHAPE INPUT VOLTAGE 110-127 Dome FREQUENCY 50/60 26W DIMMABLE LAMPHOLDER GU24 Yes CABLE COLOUR CABLE LENGTH Black textile

CANOPY Chrome Canopy LAMPHOLDER

E27

CABLE LENGTH 400cm | 157.5"; 1000cm | 393.7"

LIGHT DIRECTION All directions

NUMBER OF LIGHTSOURCES MAX POWER CONSUMPTION


400cm | 157.5"

LIGHT DIRECTION All directions

Emperor Suspended / Small

Dimensions





Product

width 60cm | 23.6" неіднт 43cm | 16.9" **дертн** 60cm | 23.6" **DIAMETER** 60cm | 23.6" WEIGHT NETTO 3kg | 6.61lbs

Packaging

width 64cm | 25.2" ныднт 52ст | 20.5" **CUBAGE** $0.21m^3 | 7.52ft^3$ **LENGTH** 64cm | 25.2" **weight** 6.5kg | 14.33lbs

Technical CE

MATERIAL Bamboo rattan cage shade, glass diffuser

ENERGY LABEL

A++ to E

LIGHTSOURCE TYPE Incandescent

shape Dome

FREQUENCY 50/60

dimmable Yes

CABLE COLOUR Black textile

сапору Pebble II Black, ABS INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

INPUT VOLTAGE 220-240

MAX POWER CONSUMPTION

LAMPHOLDER E27

CABLE LENGTH 400cm | 157.5"; 1000cm | 393.7"

All directions

Technical cULus

MATERIAL Bamboo rattan cage shade, glass diffuser

A++ to E

LIGHTSOURCE TYPE Incandescent

shape Dome

FREQUENCY 50/60

dimmable Yes

CABLE COLOUR Black textile

салору Chrome Canopy

Dimmer

INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

INPUT VOLTAGE 110-127

max power consumption 60W

LAMPHOLDER E26

CABLE LENGTH 400cm | 157.5"

All directions

For fluent dimming behaviour we advise a dimmer that is **DIMMER TYPE** compatible with the following specs.

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

Mains dimmable with compatible light source