




### Assembly and Installation Instructions for Model's

# 30060/1FM

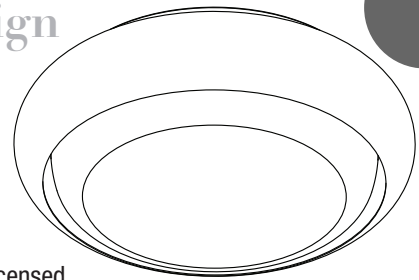

## CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.


**Warning** please make sure the electrical breaker is shut off before commencing with this installation

Read and familiarize yourself with these instructions before commencing

This fixture is certified for ceiling mounting only and is suitable for Damp locations and dimmable with a Triac Dimmer

The fixture uses a 120v A/C LED panel which is supplied with a clear glass cover plate, no driver required

Package Contents		
Part	Description	Qty
A	Mounting bracket	1
B	Junction-Box mounting bolts	2
C	Ceiling screws and anchors	2
D	Fixture assembly	1
E	Fixture mounting nuts and washers	2
F	Electrical wire connectors	3
G	Opal glass twist and lock diffuser	1

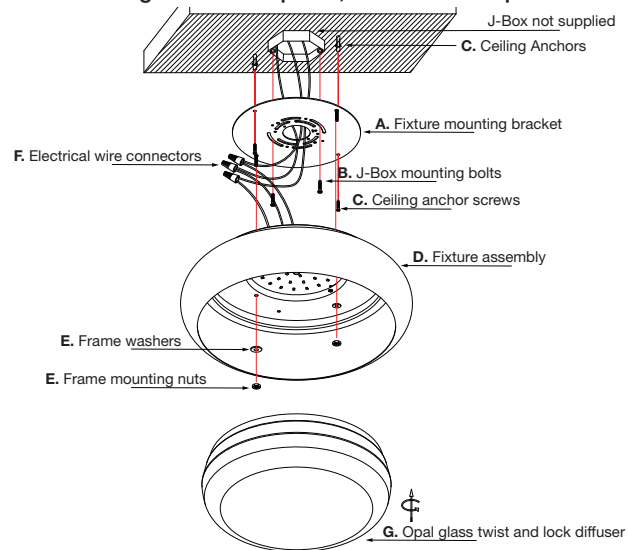

### Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- Loosly attach the supplied Mounting Bracket (A) with the two supplied mounting bolts (B) to the Junction-Box. With a pencil mark the two holes for the supplied Ceiling Anchors (C), remove the mounting bracket and drill two holes for the ceiling anchors and insert the two plastic anchors. Making sure the electrical supply wires from the Junction-Box are inserted through the mounting bracket, re-attach the mounting bracket to the Junction Box and secure with both the Junction box mounting bolts and the ceiling anchor screws.
- Connect the supply wires to the fixture wires using the supplied electrical wire connectors (F). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- Gently tuck-in the excess electrical supply cables into the Junction-Box and attach the fixture assembly (D) to the mounting bracket by inserting the fixture assembly to the threaded studs protruding from the mounting bracket (A) insert the supplied fixture mounting washers and secure with supplied fixture mounting nuts (E).
- Attach the Opal glass diffuser by inserting the glass diffuser (D) into the fixture assembly (C) and gently twisting the glass diffuser in a clock-wise direction.
- Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use