



KWARTET™

FPS8553** 52" Ceiling Fan

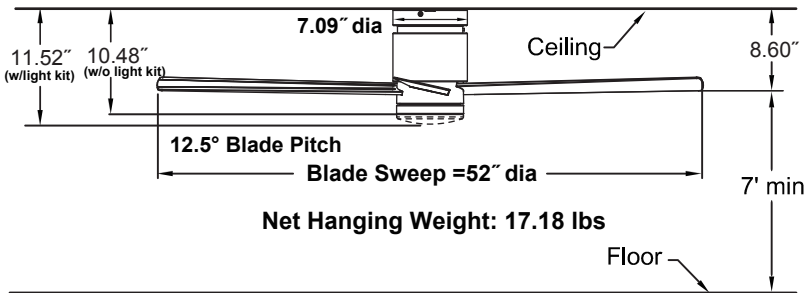

Ceiling Bracket
Width of the screw slot



INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 20 AC motor is designed for optimal performance with this fan.

BLADE SET:

A set of four 26" composite blades is included.

CONTROL OPTIONS:

TR800 hand-held remote control is included. Push button remote control with variable fan speeds, ON/OFF dimmer light levels, color temperature and off button. Optional WT503WH wall controls is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (3000K/4000K/5000K) included.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

Available Finishes	
BN	Brushed Nickel with Brushed Nickel blades and Opal Frosted Glass / Steel Cap
BL	Black with Black blades and Opal Frosted Glass / Steel Cap
BS	Brushed Satin Brass with Matte White blades and Opal Frosted Glass / Steel Cap
GR	Matte Greige with Weathered Wood blades and Opal Frosted Glass / Steel Cap
MW	Matte White with Matte White blades and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	158	4498	81	0.47	56
Med	120	3435	102	0.37	34
Low	71	2027	141	0.24	14

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
37	3340	10	91

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1600	3000/4000/5000	90%