


SculptAire™

FP8511** Ceiling Fan

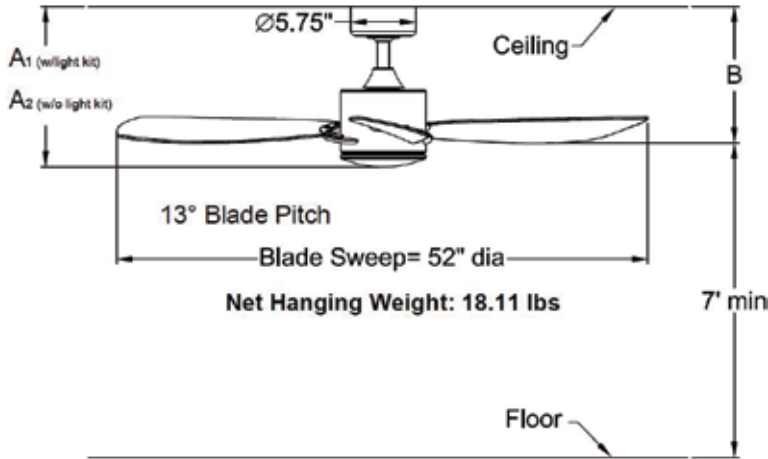

	A ₁	A ₂	B
Fan w/4.5" downrod	13.88"	13.88"	11.83"
Fan w/12" downrod	21.38"	21.38"	19.33"
Fan w/18" downrod	27.38"	27.38"	25.33"
Fan w/24" downrod	33.38"	33.38"	31.33"
Fan w/36" downrod	45.38"	45.38"	43.33"
Fan w/48" downrod	57.38"	57.38"	55.33"
Fan w/60" downrod	69.38"	69.38"	67.33"
Fan w/72" downrod	81.38"	81.38"	79.33"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 20 AC motor is designed for optimal performance with this fan.

BLADES:

A set of three 24" composite blades is included.

LIGHTING OPTIONS:

One 18-watt LED included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4, WC2WH and WR501WH wall controls, BTR9 and CRL4WH hand held remote controls, BTR9 receiver unit and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

BL and MW Fan are rated for damp locations. BS and CH Fan are rated for dry locations. This fan is for room up to 400 sq ft.

Available Finishes	
BL	Black with Clear Blade
BS	Brushed Satin Brass with Clear Blade
CH	Chrome with Clear Blade
MW	Matte White with Clear Blade

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	130	4663	80	0.48	58
Med	93	3276	105	0.35	31
Low	56	1980	147	0.23	14

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
38	3868	11	101

Light Bulb Information (120V)				
Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	18	1500	3000	90%