


**WINDPOINTE® SERIES**

**FP7500\*\*  
5-Blade Traditional Model**

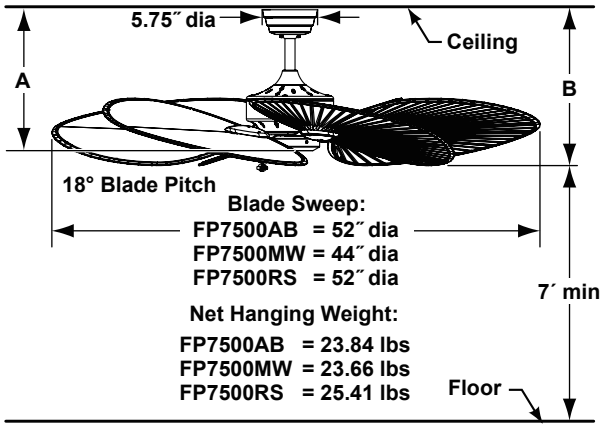

Available Finishes	
AB	Antique Brass
MW	Matte white
RS	Rust (Damp)

	A	B
Fan w/6" downrod	14.50"	14.00"
Fan w/12" downrod	20.50"	20.00"
Fan w/18" downrod	26.50"	26.00"
Fan w/24" downrod	32.50"	32.00"
Fan w/36" downrod	44.50"	44.00"
Fan w/48" downrod	56.50"	56.00"
Fan w/60" downrod	68.50"	68.00"
Fan w/72" downrod	80.50"	80.00"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

188 x 25 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of five 22" blades is included for AB and RS fan finish.  
A set of five 18" blades is included for MW fan finish.

**CONTROL OPTIONS:**

Optional CW5, WC1WH, WC2WH, WR500WH, WR501WH and CWRL4 wall controls and BTCR9, CRL4WH and CR500 remote controls, BTR9 and WFR50 receiver unit are available—sold separately.

**LIGHTING OPTIONS:**

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for lighting options.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

**LOCATION USE:**

FP7500AB and FP7500MW are rated for dry locations only.  
FP7500RS are rated for dry and damp locations.

FP7500AB Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	110	3312	69	0.41	48
Med	87	2642	84	0.33	31
Low	59	1846	126	0.23	15

Energy Guide FTC test with ISP4 blades			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
33	2964	9	91

FP7500MW Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	153	3417	71	0.41	48
Med	122	2835	91	0.33	31
Low	87	1871	129	0.23	15

Energy Guide FTC test with ISP5 blades			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
33	1372	9	42

FP7500RS Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	95	2551	60	0.37	42
Med	86	2272	65	0.34	35
Low	68	1175	71	0.23	17

Energy Guide FTC test with B5280 blades			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
32	2374	9	74