

EMILE 3 LIGHT CHANDELIER

GLC1073

General Product Information:



Safety Information:

CAUTION—RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.



USE MINIMUM 90°C SUPPLY CONDUCTORS.

SAVE THESE INSTRUCTIONS!




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

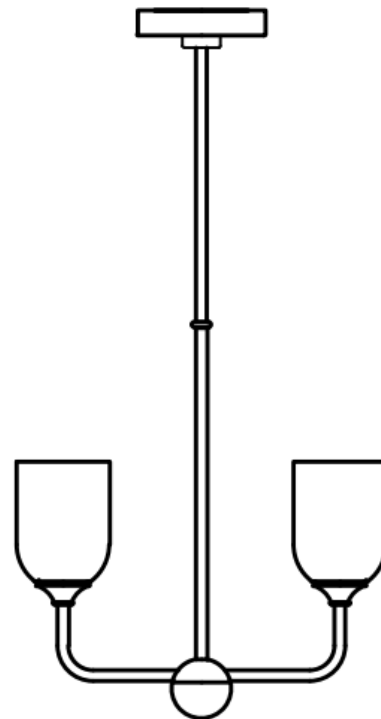

FIXTURE ANATOMY

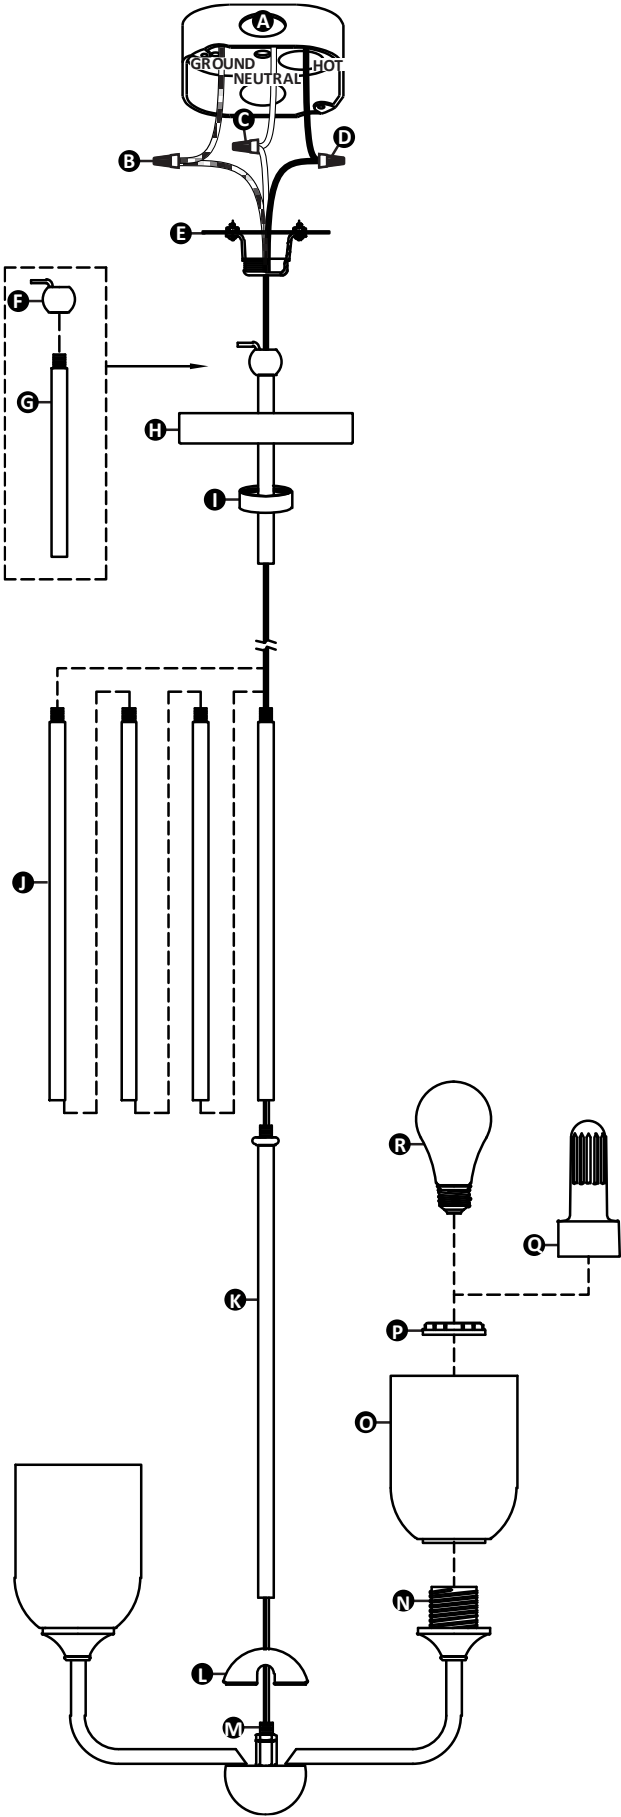

- A. Junction Box
- B. Ground Wire with Wire Nut
- C. Neutral Wire with Wire Nut
- D. Hot Wire with Wire Nut
- E. Mounting Plate
- F. Half Ball
- G. Top Stem
- H. Canopy
- I. Collar Nut
- J. Stem Assembly
- K. Bottom Stem
- L. Wire Compartment Cover
- M. Threaded Nipple
- N. Shade base
- O. Shade
- P. Socket Ring
- Q. Shade Collar Tool
- R. Socket Bulb

INSTRUCTIONS

I. Preparing the Fixture

1. Screw the half ball to the top stem.
2. Screw the stems together to the desired length.
3. Feed the fixture wires through the wire compartment cover and the stem assembly, then screw the stem assembly to the top of the fixture.
4. Feed the fixture wires through the collar nut, canopy and the half ball assembly, then screw it onto the stem assembly.
5. Secure the mounting plate to the junction box, then slide the half ball assembly onto the mounting plate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Adjust the length of the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
5. Hot fixture wire (round & smooth) and hot power line wire from the junction box (hot to hot)
6. Neutral fixture wire (square & ridged) and neutral power line wire from the junction box (neutral to neutral)
7. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Slide the canopy over the mounting plate and secure it in place with the collar nut.
2. Install the shades over the shade bases, then secure them in place with the shade collar tool.
3. Insert the bulbs into the sockets. Refer to the label on the socket for Max Wattage information.