


# ASSEMBLY & INSTALLATION INSTRUCTIONS

A591

Sprig Semi Flush 128715

---

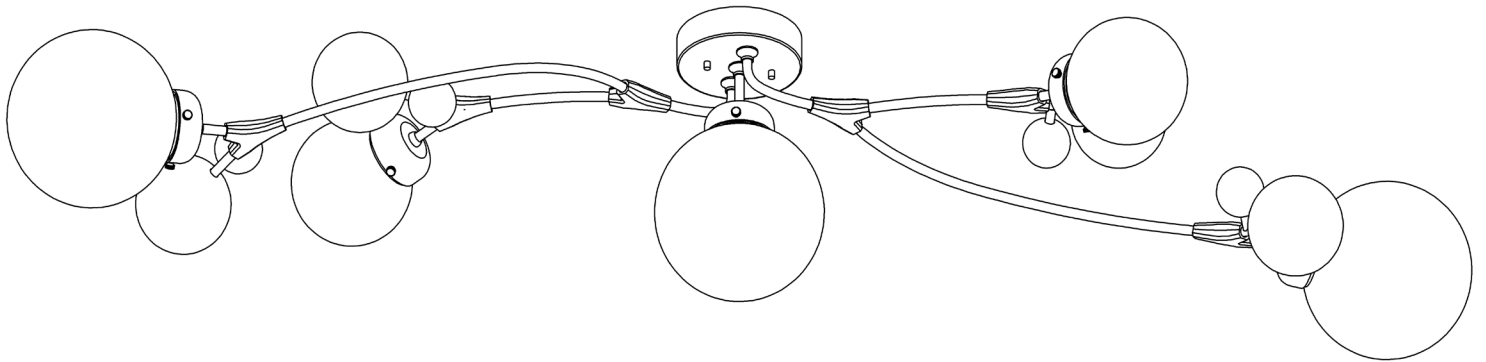

**Component Parts**

- A        Fixture**
- B        Crossbar**
- C        Ground Screw**
- D        Threaded Stud (2)**
- E        Knob (2)**
- F        Socket (5)**
- G        Cup (5)**
- H        Bulb (not included)**
- I        Glass Sm (2)**
- J        Glass Lg (3)**
- K        Thumb Screws (15)**



# ASSEMBLY & INSTALLATION INSTRUCTIONS

A591

Sprig Semi Flush 128715

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

*Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.*

## To Install Fixture (Figure 1)

**CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.**

1. Carefully unpack the fixture (A) from the carton.
2. Thread two studs (D) into the appropriate holes in the crossbar (B) that align with fixture (A) and desired orientation.
3. Using two machine screws (not provided) attach crossbar (B) to the electric box using outer oval holes to orient fixture.

**Note:** A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.


4. Adjust the studs (D) to proper length to ensure the fixture will fit snugly against the ceiling.
5. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white and black to black). Attach a pigtail lead to the crossbar ground screw (C). Connect all ground wires (bare copper or green to bare copper or green).

**CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.**

6. Carefully tuck all wires behind fixture, push fixture firmly against the ceiling and fasten by threading knobs (E) on to studs (D).

**Note:** Be sure no wires are pinched between the ceiling and the fixture. Be sure threaded studs are fully seated in knobs.

7. See instructions on next page for installing glass.

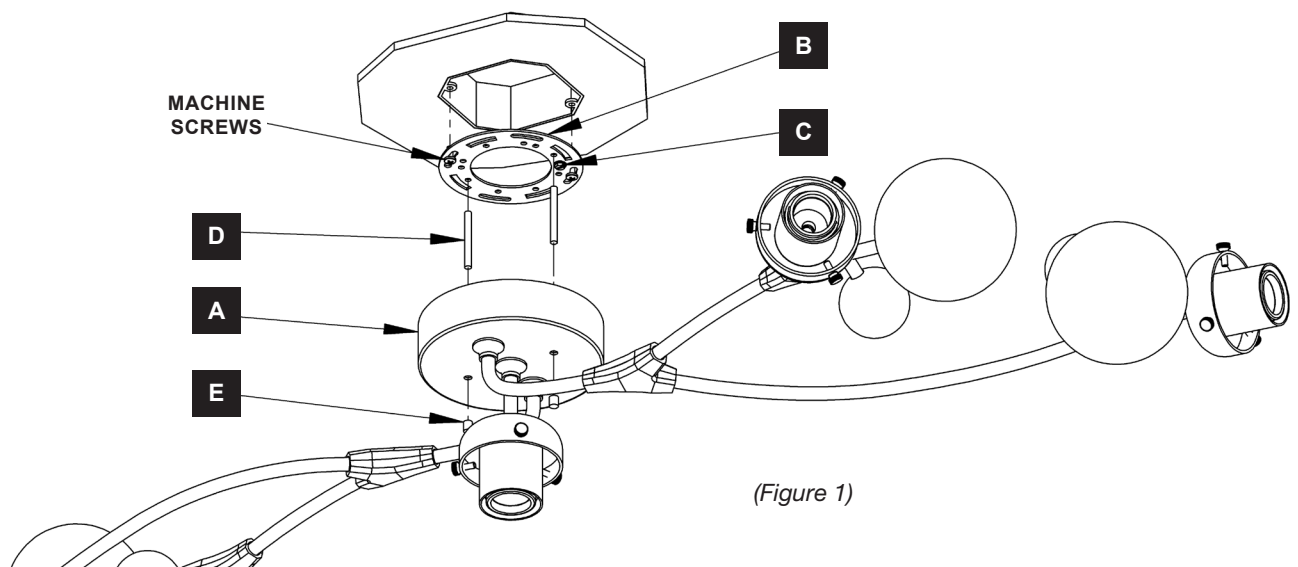

Sprig Semi Flush 128715

## To Install Glass (Figure 2)


1. Unpack glass (I & J).
2. Install bulbs (H) (not included) into sockets (F).
3. Place glass (J) over the bulb (H).
4. Slide glass (J) into cup (G) until groove in glass lines up with thumb screws (K).

**Note:** Thumb screws are shipped in cups. It may be necessary to loosen thumb screws so glass can pass into cup. Screws will not need to be removed completely.

5. Tighten thumb screws (K) evenly to secure glass (J).
6. Repeat steps for remaining small and large glass (I & J).

Figure 2 shows recommended glass locations.

7. Restore electricity at main breaker.

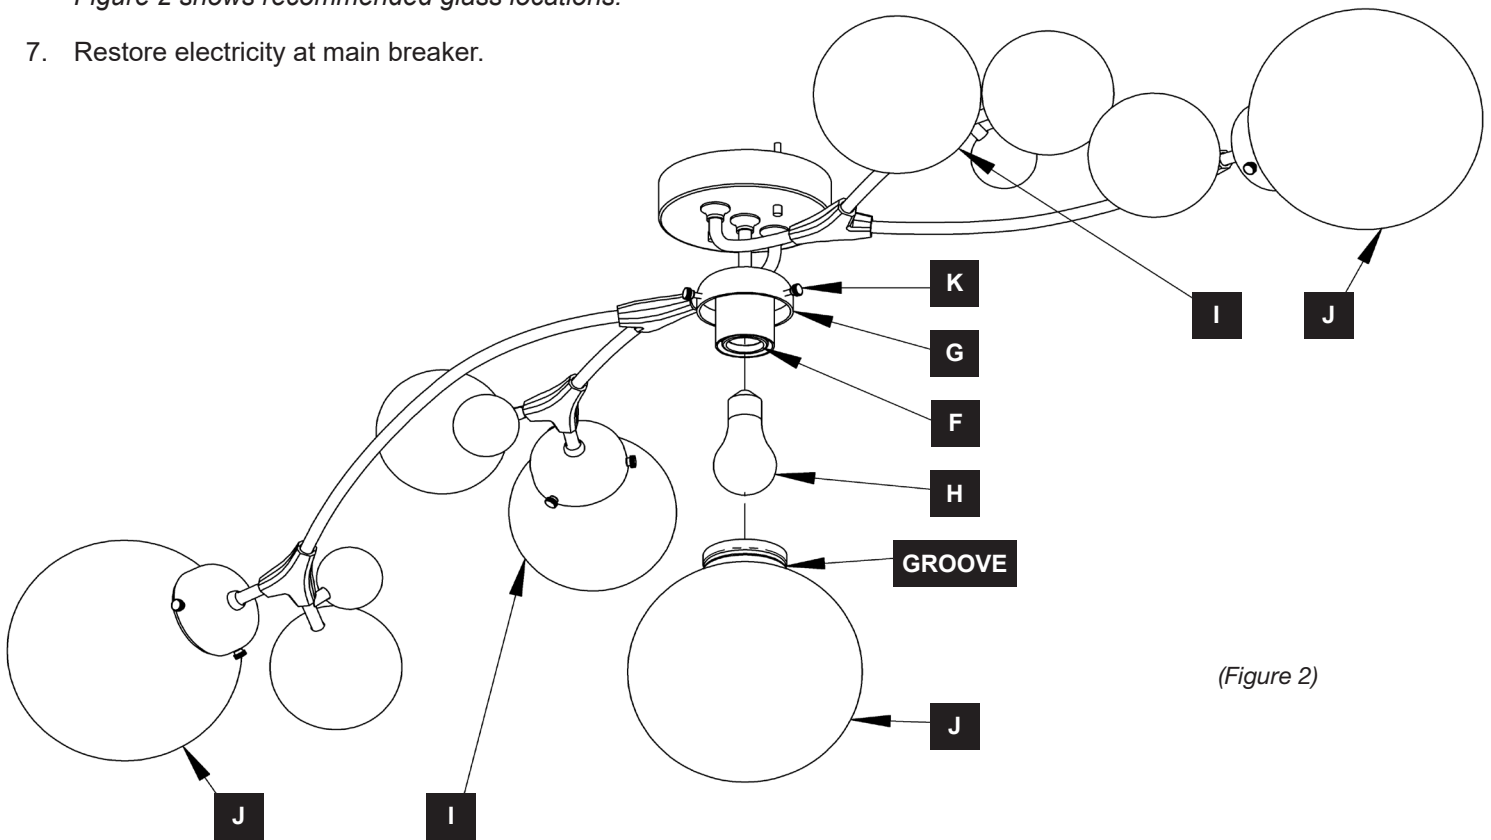

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

**\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**