


# ASSEMBLY & INSTALLATION INSTRUCTIONS

A544

STACKS 6-LIGHT PENDANT - 401349

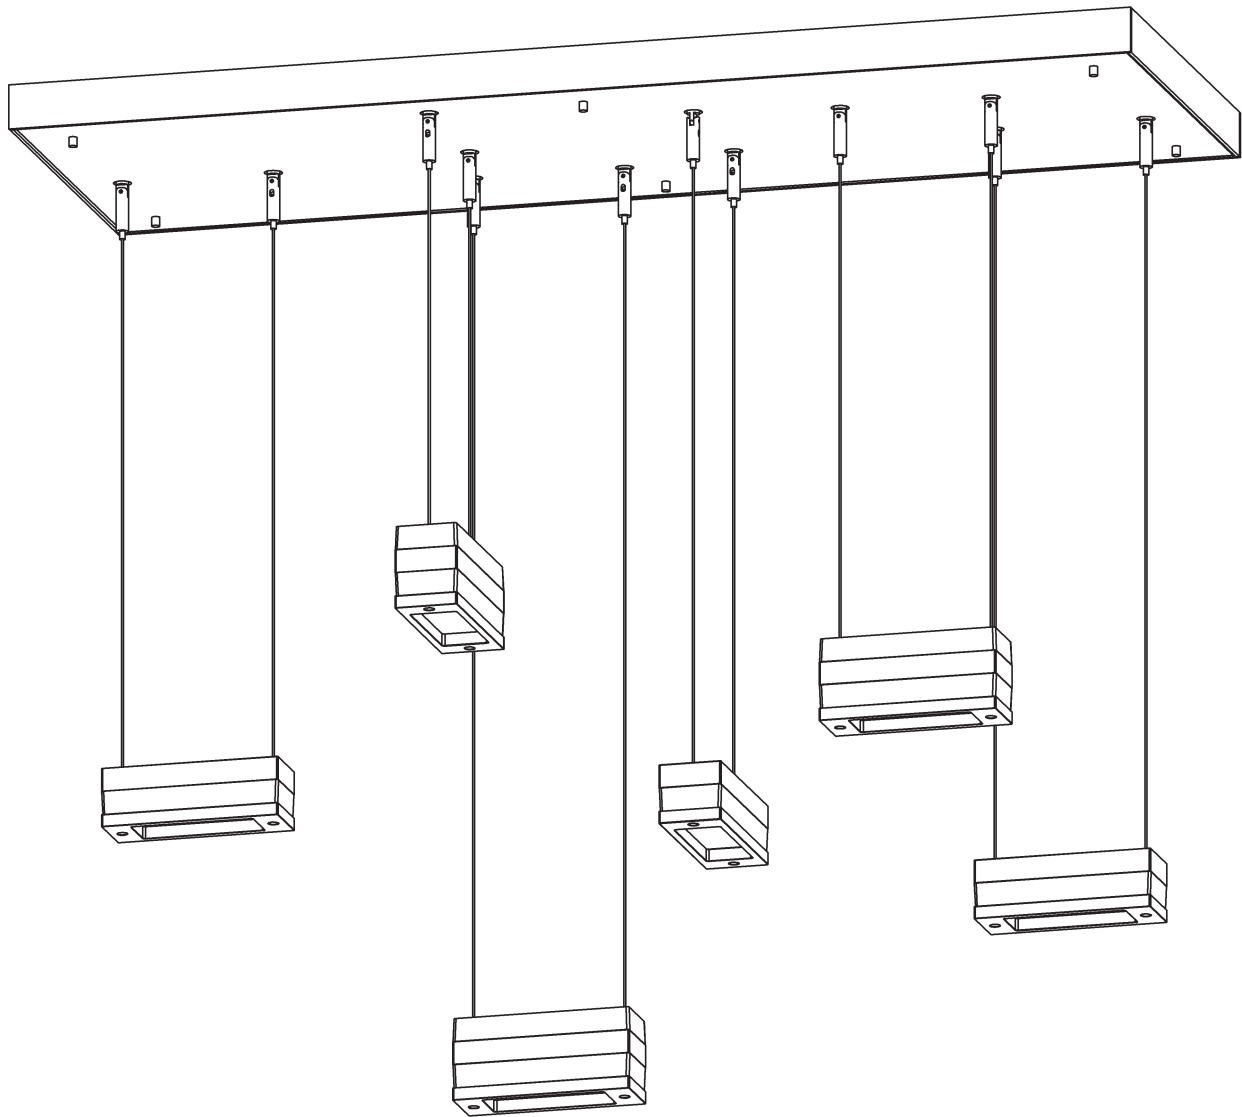

HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING  
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

40296 Rev A

1 OF 6

**Component Parts**

- A Canopy**
- B #10 Screws (4)**
- C Anchors (4)**
- D Cupped Washer**
- E Ground Screw**
- F Canopy Cover Plate**
- G Knobs (6)**
- H Grippers (12)**
- I Glass Stack Short (3)**
- J Glass Stack Tall (3)**
- K Supply/Support Cable (12)**



# ASSEMBLY & INSTALLATION INSTRUCTIONS

A544

STACKS 6-LIGHT PENDANT - 401349

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## Install Canopy (Figure 1 - on following page)

1. Carefully unpack the fixture from the carton.

**NOTE:** TO ENSURE FIXTURE ORIENTATION WILL BE CORRECT, TAKE NOTE OF GRIPPER LOCATIONS ON CANOPY BEFORE NEXT STEPS.

2. Center the canopy (A) over the electric box. With a pencil, mark the location of desired mounting positions on the ceiling. Set canopy (A) aside.
3. Drill 1/4" holes in the locations marked on the ceiling. Place the tapered end of the anchors (C) into the holes and gently tap them flush to the ceiling using a light weight hammer.
4. Thread the wires in the electrical box through the hole in the canopy (A) while moving the canopy into position.
5. Using two machine screws (not provided) fasten canopy (A) to the electric box.

**Note:** A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

6. Install #10 screws (B) through canopy (A) and into anchors (C). Be careful not to overtighten or strip anchors (C).
7. Attach a pigtail lead to the canopy (A) using the provided ground screw (E) and cupped washer (D), found in kit bag.
8. Using suitable wire connectors (not provided), connect fixture wires to supply wires (White to white and black to black). Holding canopy cover plate (F) close to canopy (A), connect all ground wires (bare copper or green to bare copper or green) together.

**Caution:** Be sure wire connectors are twisted on securely, and no bare wire is exposed.

9. Lift canopy cover plate (F) up allowing grippers (H) to slide through holes in plate (F) until inside canopy.


**NOTE:** Be sure no wires or cables are pinched between cover plate and canopy.

10. Secure with knobs (G).
11. Refer to following pages to continue install.

# ASSEMBLY & INSTALLATION INSTRUCTIONS

A544

STACKS 6-LIGHT PENDANT - 401349

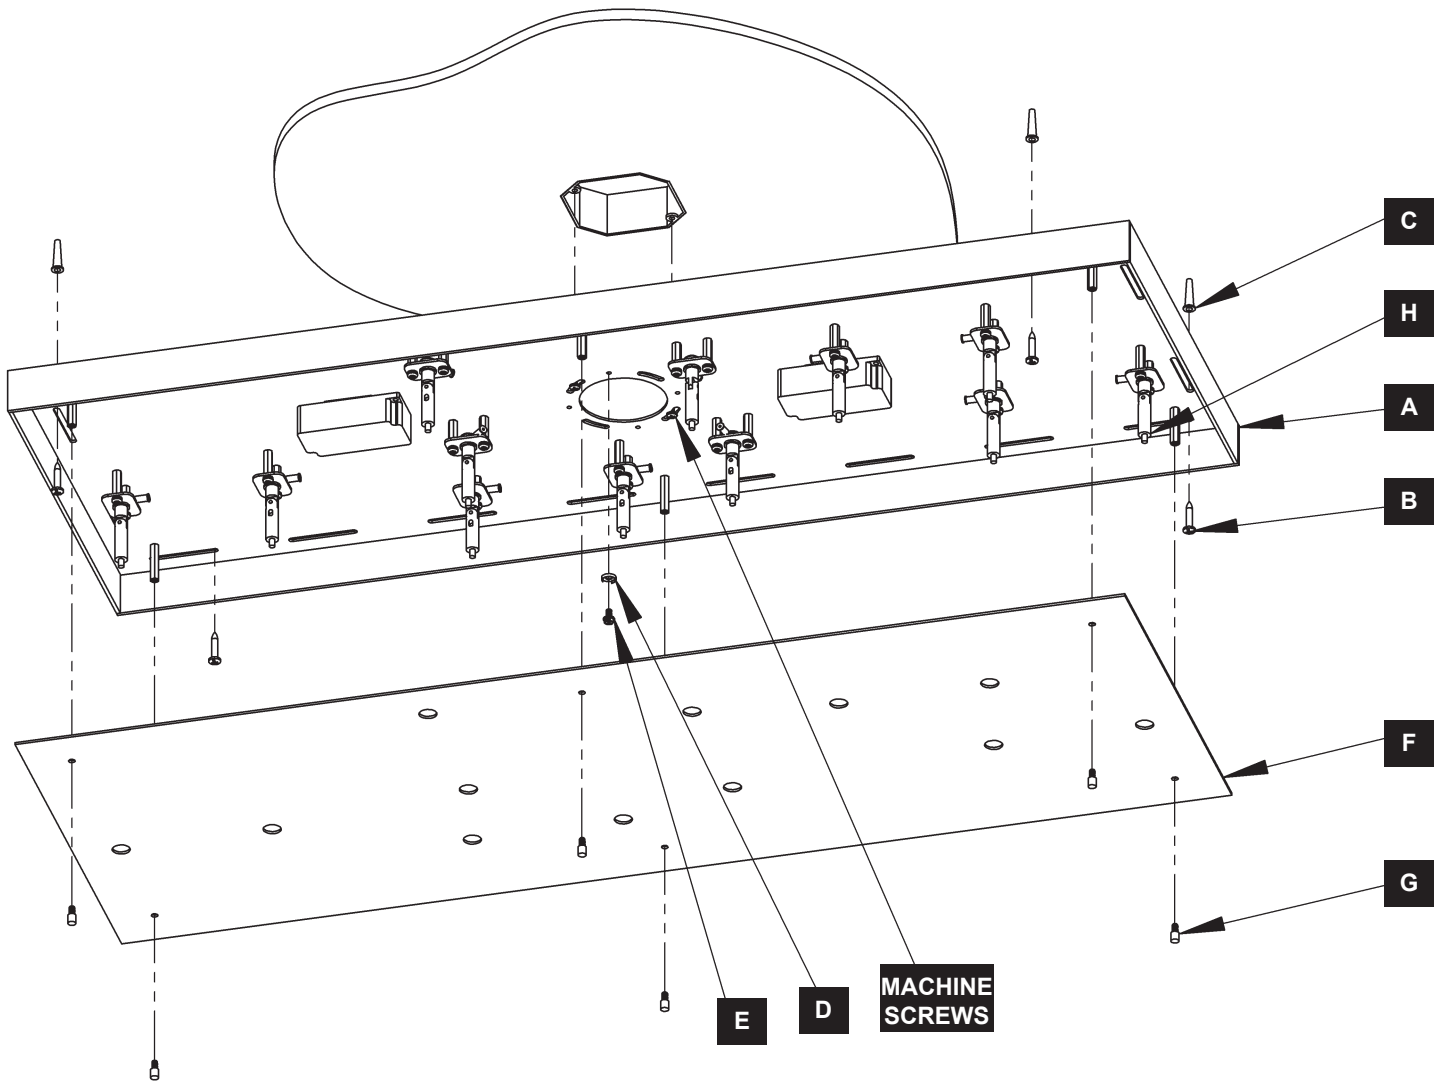

(Figure 1)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING  
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

40296 Rev A

4 OF 6

# ASSEMBLY & INSTALLATION INSTRUCTIONS

A544

STACKS 6-LIGHT PENDANT - 401349

---

## TO INSTALL GLASS STACKS (Figure 2)

---

1. Locate glass assemblies (I & J). Uncoil the supply/support cables (K) to find the (+) cable. There will be a positive (+) label on one side of the glass stack.
2. Align the positive (+) sticker on the glass stack (I & J) with the (+) gripper (H).
3. Push the support/supply cable (K) from the positive (+) side of the glass stack (I & J) into the positive (+) gripper (H). Push the cable in far enough so that it exits the side of the gripper (H).
4. Repeat for the remaining supply/support cable (K) and gripper (H).

**NOTE:** *To lower glass stack, depress the gripper plunger and pull supply/support cable out until desired height is reached.*

5. Repeat for remaining glass stacks (I & J).

**Note:** *Refer to picture on front page of instructions for Design preference layout.*

6. Once all glass is at desired height, cut the supply/support cables (K) as close to the notch in the gripper (H) as possible.

**CAUTION:** *Once support cables are cut the glass can NOT be lowered. Make sure desired height is reached before cutting cables.*


**CAUTION:** *Fixture will not light if any part of support cable is touching fixture.*

7. Restore electricity at main breaker.

# ASSEMBLY & INSTALLATION INSTRUCTIONS

A544

STACKS 6-LIGHT PENDANT - 401349

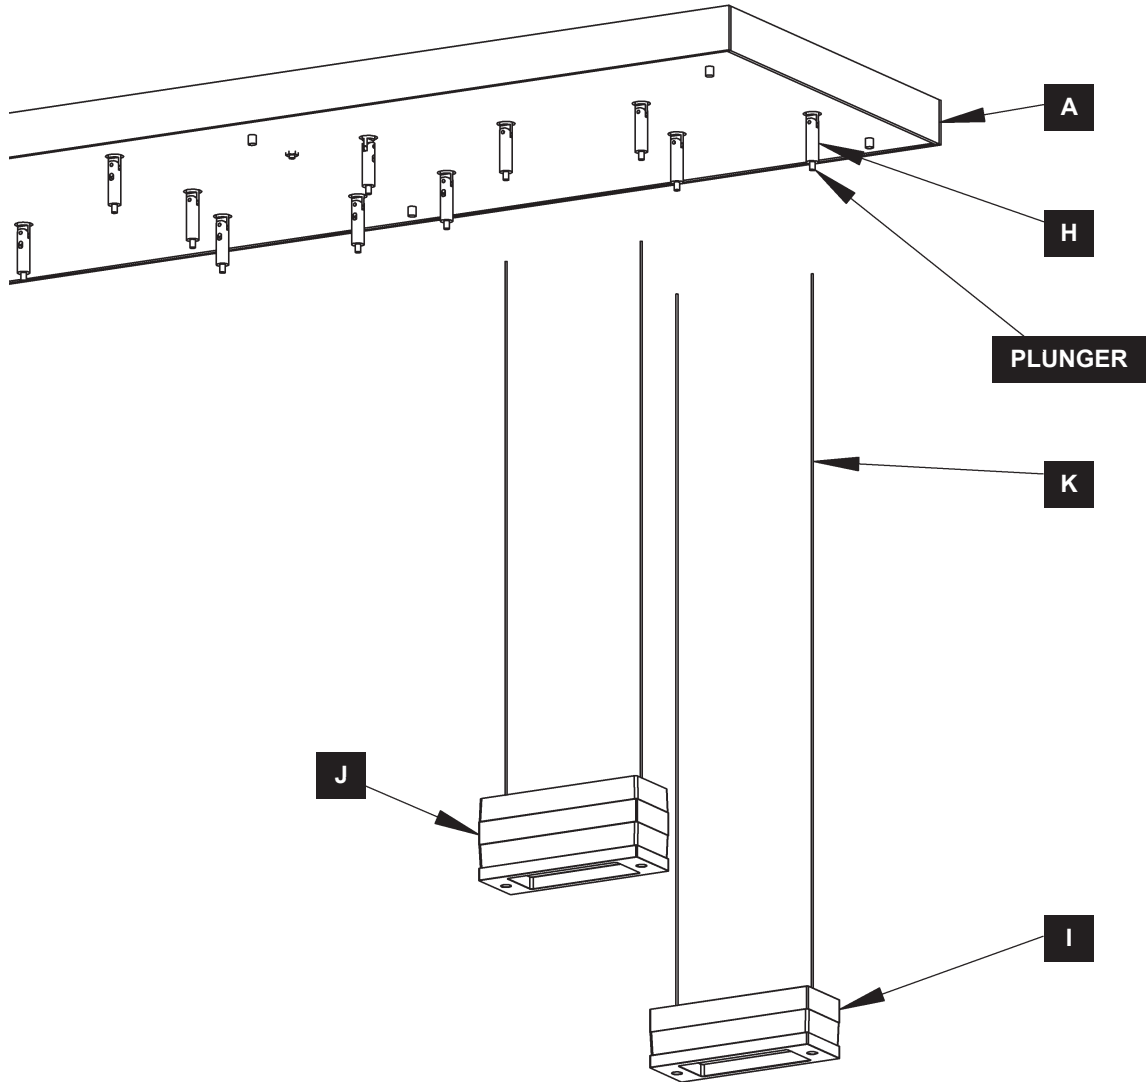

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

**\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**