# BRUNI PD24732

### **PENDANTS**

## **DESCRIPTION**

**PROJECT** 

The Bruni Collection answers many requests for classic, modern shapes combined with ample lighting. These completely adjustable rings allow for completely customized styling that's all your own. Available in two sophisticated finishes, the acrylic ribbed texture of each circular lamp provides sufficient lighting for even the darkest rooms in your home







PD24732-BG Brushed Gold


PD24732-BK Black

## **SPECIFICATION DETAILS**

Apply  LED Rated Life 50,000 hours  Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details Clear Acrylic Exterior/White Silicone Interior Adjustable Yes  Wire Length 120" Max  Wire Type Black  Minimum Hang Height 16"  Sloped Ceiling Adaptable Yes  Location Dry  Illumination Direction Up/Down		
Wattage 45W  Total Lumens 2850Im  Delivered Lumens BG-2820Im; BK-2835Im;  Voltage 120V  Color Temperature 3000K  CRI (Ra) 90CRI  Optional Color Temps 2700K - 5000K Available, Minimum Order Quan Apply  LED Rated Life 50,000 hours  Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details Clear Acrylic Exterior/White Silicone Interior Adjustable Yes  Wire Length 120" Max  Wire Type Black  Minimum Hang Height 16"  Sloped Ceiling Adaptable Yes  Location Dry  Illumination Direction Up/Down	Fixture Dimensions	D32-3/8" x H1-3/8"
Total Lumens  Delivered Lumens  BG-2820lm; BK-2835lm;  Voltage  120V  Color Temperature  3000K  CRI (Ra)  Optional Color Temps  2700K - 5000K Available, Minimum Order Quan Apply  LED Rated Life  50,000 hours  Dimming  100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details  Clear Acrylic Exterior/White Silicone Interior  Adjustable  Yes  Wire Length  120" Max  Wire Type  Black  Minimum Hang Height  16"  Sloped Ceiling Adaptable  Ves  Location  Dry  Illumination Direction  Up/Down	Light Source	LED with DC Driver
Delivered Lumens  BG-2820lm; BK-2835lm;  Voltage  120V  Color Temperature  3000K  CRI (Ra)  90CRI  Optional Color Temps  2700K - 5000K Available, Minimum Order Quan Apply  LED Rated Life  50,000 hours  Dimming  100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details  Clear Acrylic Exterior/White Silicone Interior  Adjustable  Yes  Wire Length  120" Max  Wire Type  Black  Minimum Hang Height  16"  Sloped Ceiling Adaptable  Ves  Location  Dry  Illumination Direction  Up/Down	Wattage	45W
Voltage 120V  Color Temperature 3000K  CRI (Ra) 90CRI  Optional Color Temps 2700K - 5000K Available, Minimum Order Quan Apply  LED Rated Life 50,000 hours  Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details Clear Acrylic Exterior/White Silicone Interior Adjustable Yes  Wire Length 120" Max  Wire Type Black  Minimum Hang Height 16"  Sloped Ceiling Adaptable Yes  Location Dry  Illumination Direction Up/Down	Total Lumens	2850lm
Color Temperature 3000K  CRI (Ra) 90CRI  Optional Color Temps 2700K - 5000K Available, Minimum Order Quan Apply  LED Rated Life 50,000 hours  Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details Clear Acrylic Exterior/White Silicone Interior Adjustable Yes  Wire Length 120" Max  Wire Type Black  Minimum Hang Height 16"  Sloped Ceiling Adaptable Yes  Location Dry  Illumination Direction Up/Down	<b>Delivered Lumens</b>	BG-2820lm; BK-2835lm;
CRI (Ra)  Optional Color Temps  2700K - 5000K Available, Minimum Order Quan Apply  LED Rated Life  50,000 hours  Dimming  100% - 10%, TRIAC or ELV Dimmer (Not Include Silicone Interior Adjustable  Yes  Wire Length  120" Max  Wire Type  Black  Minimum Hang Height  16"  Sloped Ceiling Adaptable  Location  Dry  Illumination Direction  Up/Down	Voltage	120V
Optional Color Temps  2700K - 5000K Available, Minimum Order Quan Apply  LED Rated Life  50,000 hours  Dimming  100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details  Clear Acrylic Exterior/White Silicone Interior  Adjustable  Yes  Wire Length  120" Max  Wire Type  Black  Minimum Hang Height  16"  Sloped Ceiling Adaptable  Location  Dry  Illumination Direction  Up/Down	Color Temperature	3000K
Apply  LED Rated Life 50,000 hours  Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Include Inclu	CRI (Ra)	90CRI
Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Include Diffuser Details Clear Acrylic Exterior/White Silicone Interior Adjustable Yes Wire Length 120" Max Wire Type Black Minimum Hang Height 16" Sloped Ceiling Adaptable Yes Location Dry Illumination Direction Up/Down	Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
Diffuser Details  Clear Acrylic Exterior/White Silicone Interior  Adjustable  Yes  Wire Length  120" Max  Wire Type  Black  Minimum Hang Height  16"  Sloped Ceiling Adaptable  Location  Dry  Illumination Direction  Up/Down	LED Rated Life	50,000 hours
Adjustable Yes Wire Length 120" Max Wire Type Black Minimum Hang Height 16" Sloped Ceiling Adaptable Location Dry Illumination Direction Up/Down	Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Wire Length 120" Max Wire Type Black Minimum Hang Height 16" Sloped Ceiling Adaptable Yes Location Dry Illumination Direction Up/Down	Diffuser Details	Clear Acrylic Exterior/White Silicone Interior
Wire Type Black Minimum Hang Height 16" Sloped Ceiling Adaptable Location Dry Illumination Direction Up/Down	Adjustable	Yes
Minimum Hang Height 16"  Sloped Ceiling Adaptable Yes  Location Dry  Illumination Direction Up/Down	Wire Length	120" Max
Sloped Ceiling Adaptable  Location  Dry  Illumination Direction  Up/Down	Wire Type	Black
Location Dry Up/Down	Minimum Hang Height	16"
Illumination Direction Up/Down	Sloped Ceiling Adaptable	Yes
	Location	Dry
Canony Dimensions D7-1/8" v H1-5/8"	Illumination Direction	Up/Down
Carlopy Difficulties	Canopy Dimensions	D7-1/8" x H1-5/8"



 $<sup>\</sup>hbox{* For warranty information, please visit www.kuzcolighting.com/warranty}\\$ 

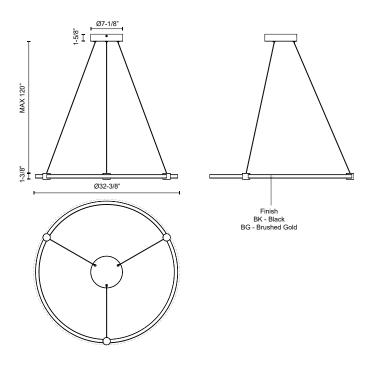

KUZCO

CANADA: 19054 28TH AVENUE - SURREY, BC V3Z 6M3 USA: 3035 E. LONE MOUNTAIN ROAD - LAS VEGAS, NV 89081

WWW.KUZCOLIGHTING.COM
© 2023 KUZCO LIGHTING. ALL RIGHTS RESERVED.

CON	$\Lambda N \Lambda$	FN	IΤ



