


## PH 5 MINI

Designed by Poul Henningsen

---

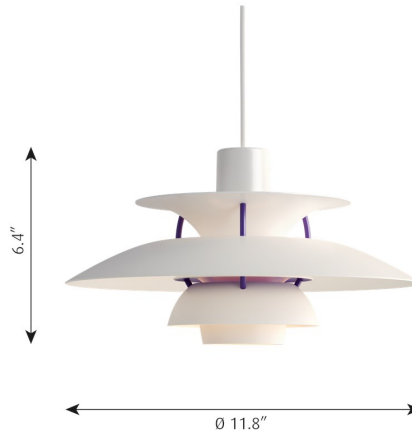

---

### Description

The fixture provides 100% glare-free light. Its design is based on the principle of a reflective three-shade system that directs most of the light downward. The fixture emits both downward and lateral light, thus illuminating itself.

---

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000142110	WHITE CLASSIC, 336	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142113	WHITE MODERN, 337	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142115	HUES OF GREEN, 331	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142116	HUES OF GREY, 333	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142117	HUES OF ORANGE, 328	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142118	HUES OF RED, 330	11.8 / 6.4 / 11.8 IN / 2.0 LB
10000142119	HUES OF ROSE, 329	11.8 / 6.4 / 11.8 IN / 2.0 LB
5741917457	HUES OF BLUE, 332	11.8 / 6.4 / 11.8 IN / 2.7 LB
5741918223	COP LAC, 930	11.8 / 6.4 / 11.8 IN / 5.0 LB
5741919251	BRASS, 936	11.8 / 6.4 / 11.8 IN / 3.9 LB
5741934359	MONOCHROME BLUE	11.8 / 6.4 / 11.8 IN / 2.7 LB
5741934456	MONOCHROME WHITE	11.8 / 6.4 / 11.8 IN / 2.7 LB
5741934906	MONOCHROME BLACK	11.8 / 6.4 / 11.8 IN / 2.7 LB

---

# louis poulsen

## Materials & Finishes

### MATERIALS

Shades and anti-glare disc: Spun aluminum, spun copper or spun brass. Struts: rolled aluminum.

### FINISHES

Classic (white) or Modern White: Matte powder-coated.

Monochrome Black, Monochrome Blue, Monochrome White, Hues of Blue, Hues of Green, Hues of Gray, Hues of Orange, Hues of Red, Hues of Rose: Matte wet-painted.

Metal versions: Polished brass or copper and white, matte powder-coated. Please note that the copper and brass surfaces are untreated. This means that the surfaces will change over time and develop a patina.

---

## Mounting

Canopy and cord: Black for Monochrome Black, White for all other colors. Cord type: 3-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet. For mounting instructions, see download section on the product detail page.

---

## Information

Electrical:

System Wattage: 6W

LED Wattage: 6 W

Delivered lumens: 156 - 142

Efficacy: 26.0 lm/W - 23.7 lm/W

Certifications:

cULus, Damp Location

Protection class IP20


Controllability: Phase dimming

Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.


---

## Light distribution diagrams


### CARTESIAN

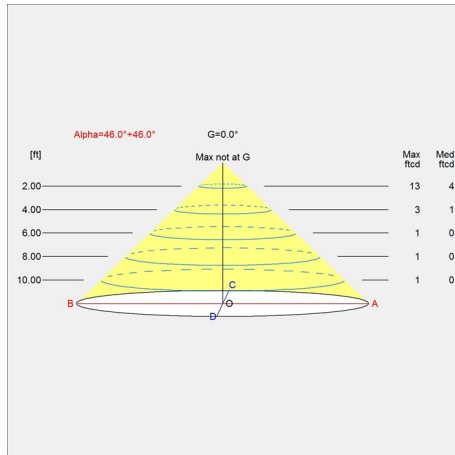

### ISOLUX

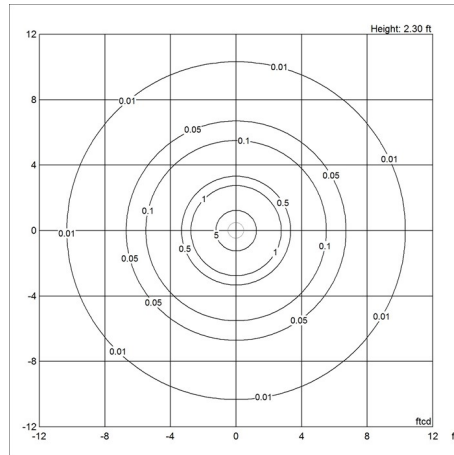

### POLAR

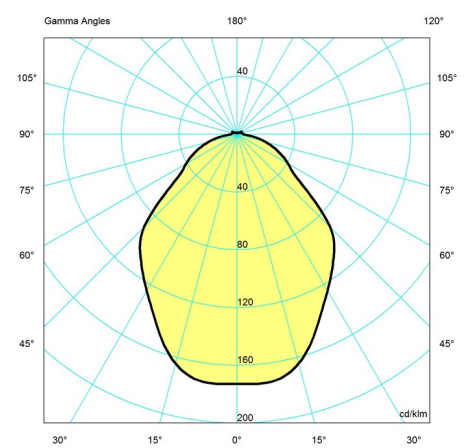

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000142110	A-15/medium	120V	117	-	White textile
10000142113	A-15/medium	120V	156	-	White textile
10000142115	A-15/medium	120V	142	-	White textile
10000142116	A-15/medium	120V	142	-	White textile
10000142117	A-15/medium	120V	147	-	White textile
10000142118	A-15/medium	120V	147	-	White textile
10000142119	A-15/medium	120V	147	-	White textile
5741917457	A-15/medium	120V	142	-	White textile
5741918223	A-15/medium	120V	117	-	White textile
5741919251	A-15/medium	120V	117	-	White textile
5741934359	A-15/medium	120V	259	-	White textile
5741934456	A-15/medium	120V	334	-	White textile
5741934906	A-15/medium	120V	258	-	Black textile