

## TOLDBOD PENDANT

Designed by Louis Poulsen A/S



### Description

The pendant emits soft downwards directed light. The matte, white-painted inside of the elliptical shade helps to assure even distribution of the light.

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000149809	BLK, 369	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149810	LIGHT GREY, 435	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149811	BLUE-GREY, 433	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149813	WHT, 349	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149814	BLK, 369	9.8 / 10 / 9.8 IN / 3.1 LB
10000149815	LIGHT GREY, 435	9.8 / 10 / 9.8 IN / 3.1 LB
10000149816	BLUE-GREY, 433	9.8 / 10 / 9.8 IN / 3.1 LB
10000149818	WHT, 349	9.8 / 10 / 9.8 IN / 3.1 LB
10000149819	BLK, 369	15.7 / 16 / 15.7 IN / 7.5 LB
10000149820	WHT, 349	15.7 / 16 / 15.7 IN / 7.5 LB
10000149900	BLK, 369	4.7 / 4.8 / 4.7 IN / 1.2 LB
10000149901	LIGHT GREY, 435	4.7 / 4.8 / 4.7 IN / 1.2 LB
10000149902	BLUE-GREY, 433	4.7 / 4.8 / 4.7 IN / 1.2 LB
10000149904	WHT, 349	4.7 / 4.8 / 4.7 IN / 1.2 LB

# **louis poulsen**

## Materials & Finishes

### **MATERIALS**

Shade: Spun aluminum.  
4.7" reflector: Spun white matte coated aluminum.  
14.7" diffuser: Matte acrylic

### **FINISHES**

Black, White, Light Grey or Blue-Grey, matte powder coated.

---

## Mounting

Canopy: White. Cord type: 18 AWG fabric covered power cord. Black cord for black, and blue-grey pendants, white cord for white and light grey pendants. 14.7" come with 1x stainless steel aircraft cable. Cord length: 12'. For mounting instructions, see download section on the product detail page.

---


## Information

Electrical:  
System Wattage: 4W or 15W  
LED Wattage: 4 W or 13 W  
Delivered lumens: 144 - 637  
Efficacy: 36 - 42 lm/W  
Certifications:  
cULus, Dry Location  
Protection class IP20  
Controllability: Phase dimming  
Actual performance dependent upon screw-base lamp used.  
For the E-socket product variants, bulbs are not included. LED light source is part of the product.


---

## Light distribution diagrams


### CARTESIAN

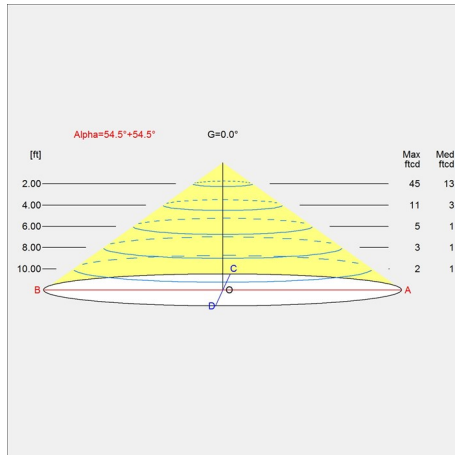

### ISOLUX

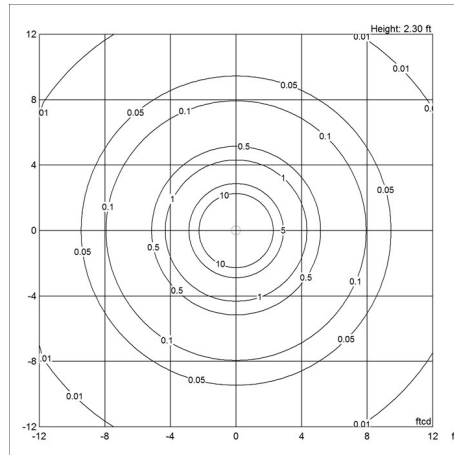

### POLAR

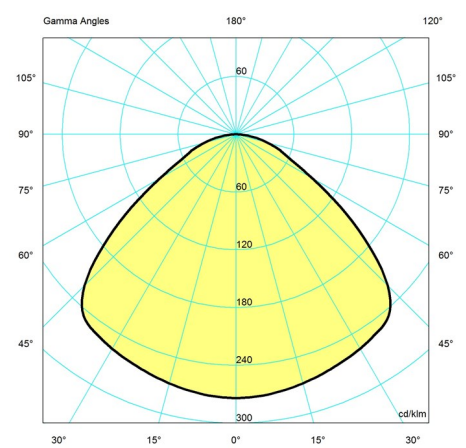

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000149809	G16.5/candelabra	120V	508	-	Black textile
10000149810	G16.5/candelabra	120V	508	-	White textile
10000149811	G16.5/candelabra	120V	508	-	Black textile
10000149813	G16.5/candelabra	120V	508	-	White textile
10000149814	A-15/medium	120V	656	-	Black textile
10000149815	A-15/medium	120V	656	-	White textile
10000149816	A-15/medium	120V	656	-	Black textile
10000149818	A-15/medium	120V	656	-	White textile
10000149819	A-19/medium	120V	637	-	Black textile
10000149820	A-19/medium	120V	637	-	White textile
10000149900	T-4 G9	120V	287	-	Black textile
10000149901	T-4 G9	120V	287	-	White textile
10000149902	T-4 G9	120V	287	-	Black textile
10000149904	T-4 G9	120V	287	-	White textile

## Specification Notes

- 4.7 IN available only in 4W LED/T-4/G9.
- 6.7 IN available only in 10W LED/G16.5/candelabra.
- 9.8 IN available only in 10W LED/A-15/medium.
- 15.7 IN available only in 15W LED/A-19/medium.