




**PRODUCT NAME:** Civic  
**ITEM NUMBER:** 54367

**Please consult your electrician for hanging fixture and wiring.**

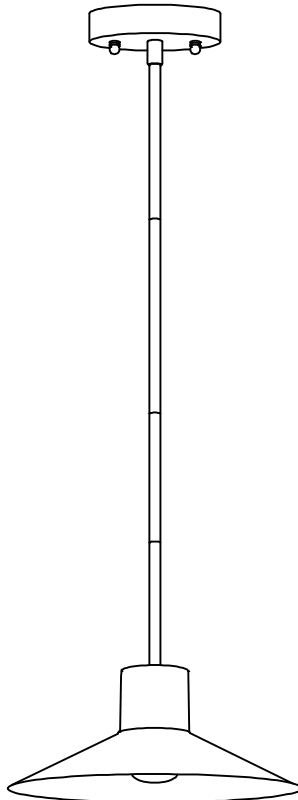


**To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant.**

**WARNING: Wires need to be connected to driver found in canopy and should not connect directly to power source or a short might occur.**

**11W LED**

**PRODUCT NAME:** Civic  
**ITEM NUMBER:** 54367

**CAUTION:** Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.  
Carefully unpack and identify all parts before assembly

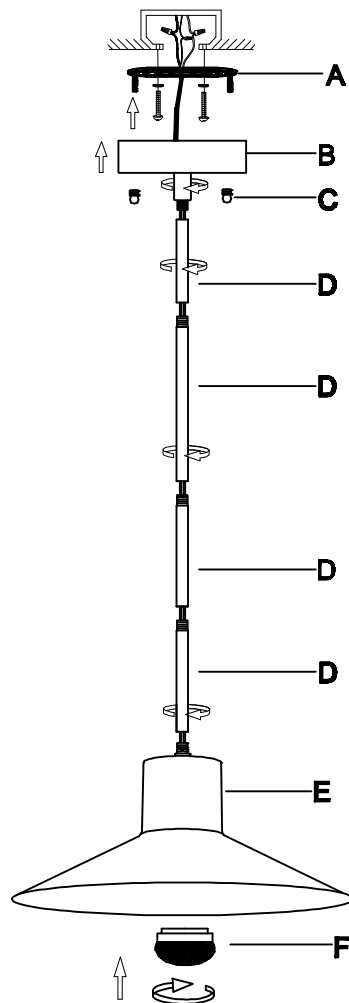

### Installation Procedures

1. Remove mounting bracket (A) from canopy (B) and install to electrical box.
2. Run wire through stem (D) lengths and combine stem lengths to meet desired mounting height. Attach the stem (D) to the body of the fixture.
3. Wire fixture to wires in outlet box. Copper wire is for Ground.
4. Install fixture to mounting bracket (A) using finials (C) to secure.
5. Attach glass to fixture by threading onto socket.