

# INSTALLATION INSTRUCTION FOR 1421

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .  
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARATION

1. Shut off the power at the fuse box or circuit breaker box. If necessary. Remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

## ASSEMBLING THE FIXTURE

3. Thread the pipe (G) onto nipple (F), pipe (I) onto nipple (H), pipe (K) onto nipple (J), pipe (M) onto (L), pipe (O) onto nipple (N), nipple (P) into pipe (O).

## MOUNTING THE FIXTURE (FIG.1)

5. Thread the two mounting screws (A) part way into the mounting bar (B). Secure the mounting bar (B) to junction box (not provided) with the junction box screws (C) through slotted holes in mounting bar (B).

## CONNECTING THE WIRES (Fig. 2)

6. Connect the fixture wires to the junction box wires as shown in Fig. 2. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no Green Ground Wire from the junction box, connect the Fixture Ground Wire to the Circular Strap or the Mounting bar with the Green Screw provided.
7. Tuck these wire connections neatly into the ceiling junction box.
8. Raise the canopy (D) allowing for the mounting screws (A) to protrude through the holes on the canopy (D), then secure with the finials (E).
9. Slide the glass (R) over the socket (Q) and secure with the retaining ring (S)

## COMPLETING THE INSTALLATION

10. Install the proper light bulbs for you fixture.  
**(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Return the power to the junction box and test the fixture. Your installation is now complete.

© Minka Lighting, Inc.

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.

FIG.1

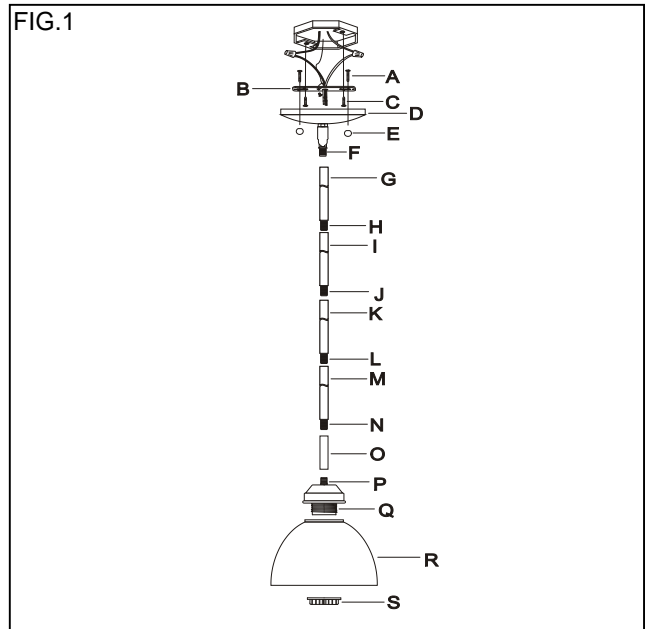


Fig.2

