
## moooi

# Raimond II Tensegrity

**RAIMOND PUTS** 

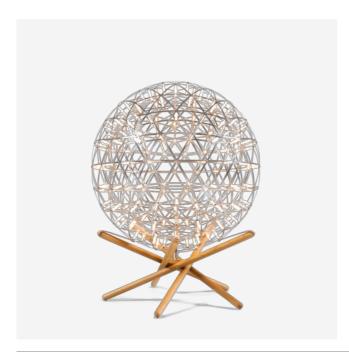

The Raimond Tensegrity is a floor lamp made from elegant metal, complemented with the sturdy earthiness of wood. Tensegrity is a term that was first described by Buckminster Fuller as an architectural term. It refers to the interconnected wooden structure that uses tension and pressure to keep its shape. The beauty of the Raimond Tensegrity lies not only in its contrasting materials, but also in the trigonometric harmony of both structures. Mathematical perfection times two.

## Detailing



Raimond Puts never saw his final design. But, together with Raimond's wife, artist & designer Tis Ernst, Moooi completed the Raimond Tensegrity.

### Colours

Stainless steel

## Raimond II Tensegrity / Raimond II Tensegrity, R61

#### **Dimensions**

61cm | 24"





80cm | 31.5"

#### Product

width 61cm | 24" HEIGHT 80cm | 31.5" DEPTH 61cm | 24" DIAMETER 61cm | 24" WEIGHT NETTO 10kg | 22.05lbs

#### **Packaging**

width  $75 \mathrm{cm} \mid 29.5"$ Height  $75 \mathrm{cm} \mid 29.5"$ Cubage  $0.42 \mathrm{m}^3 \mid 14.9 \mathrm{ft}^3$ Length  $75 \mathrm{cm} \mid 29.5"$ Weight  $10 \mathrm{kg} \mid 22.05 \mathrm{lbs}$ 

#### Technical CE / CU

#### MATERIAL

Stainless Steel Sphere with PMMA lenses, wooden legs and leather straps

**ENERGY LABEL** 

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

MAX POWER CONSUMPTION

17W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

LIGHT DIRECTION

All directions

Transparent with tinned cores

SWITCH

In line dimmer switch integrated in power supply housing

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

162

FREQUENCY 50/60

DIMMABLE

Yes

LIFETIME

50000 hours

**CABLE LENGTH** 500cm | 196.9"

COLOUR TEMPERATURE

2523 K

**CRI** 92

LIGHT OUTPUT 664 lm

 $\epsilon$ 

## Raimond II Tensegrity / Raimond II Tensegrity, R89

**Dimensions** 

89cm | 35"



**неіднт** 113cm | 44.5" **DEPTH** 89cm | 35" **DIAMETER** 89cm | 35" **WEIGHT NETTO** 16kg | 35.27lbs

Product

**WIDTH** 89cm | 35"

**wiDтн** 104cm | 40.9" **ныднт** 104cm | 40.9" **CUBAGE**  $1.12 \text{m}^3 \mid 39.72 \text{ft}^3$ 

**Packaging** 

**LENGTH** 104cm | 40.9" **WEIGHT** 16kg | 35.27lbs

Technical CE / CU

MATERIAL

Stainless Steel Sphere with PMMA lenses, wooden legs and leather straps

**ENERGY LABEL** LIGHTSOURCE TYPE

**Energy Label B** LED

NUMBER OF LIGHTSOURCES LIGHTSOURCE INCLUDED

Yes 252

INPUT VOLTAGE FREQUENCY 120-250 50/60

MAX POWER CONSUMPTION DIMMABLE 26W Yes

LAMPHOLDER LIFETIME LED (Solid state) 50000 hours

CABLE COLOUR CABLE LENGTH

**COLOUR TEMPERATURE** 

In line dimmer switch integrated in power supply 2523 K housing CRI

LIGHT DIRECTION LIGHT OUTPUT

All directions 1134 lm

Dimmer

 $\epsilon$ 

Transparent with tinned cores

92

500cm | 196.9"

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

Dimmer on

**DIMMER TYPE**Dimmer on power cord

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.